


Rotary Attenuators

Model	Frequency Range	Attenuation Range	Attenuation Accuracy	VSWR	Insertion Loss	RF Input Power
50R-019	DC-2200 MHz	0-10 dB in 1 dB steps	+/- .2 dB maximum DC-1000 MHz +/- .4 dB maximum 1000-2200 MHz	1.2:1 maximum DC-1000 MHz 1.4:1 maximum 1000-2200 MHz	.2 dB maximum DC-1000 MHz .4 dB maximum 1000-2200 MHz	2 Watts average 1000 Watts peak
50R-028	DC-1000 MHz	0-1 dB in .1 dB steps	+/- .01 dB maximum DC-30 MHz +/- .03 dB maximum 30-500 MHz +/- .05 dB maximum 500-1000 MHz	1.2:1 maximum	.7 dB maximum	2 Watts average 1000 Watts peak
50R-248	DC-2500 MHz	0-10 dB in 1 dB steps	+/- .25 dB maximum DC-1100 MHz +/- .6 dB maximum 1100-2500 MHz	1.25:1 maximum DC-1100 MHz 1.5:1 maximum 1100-2500 MHz	.25 dB maximum DC-1100 MHz .5 dB maximum 1100-2500 MHz	2 Watts average 1000 Watts peak
50R-249	DC-2500 MHz	0-1 dB in .1 dB steps	+/- .05 dB maximum	1.2:1 maximum DC-1100 MHz 1.4:1 maximum 1100-2500 MHz	1 dB maximum	2 Watts average 1000 Watts peak

Common Specifications

Impedance	Operating Temperature	Standard Rotation	Indexing	RF Connectors
50 Ohms	-20° C to +85° C	Attenuation increases in clockwise direction	30 degrees with stops at minimum and maximum	SMA, BNC or TNC female

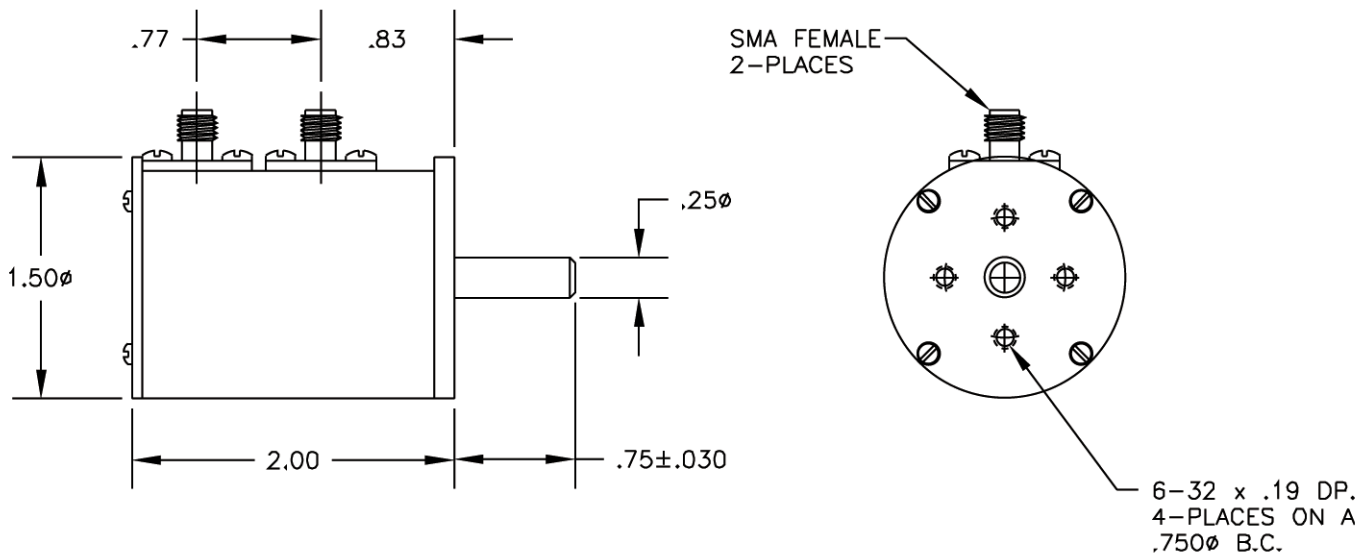

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW