


# 1 Watt Fixed Attenuators F Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR Maximum	RF Connectors
50F-XXX	DC-2200 MHz	1 thru 20 dB in any 1 dB increment	+/- .5 dB DC-1000 MHz +/- .8 dB 1000-2200 MHz	1.2:1 DC-1000 MHz 1.4:1 1000-2200 MHz	BNC, TNC, SMA or N
50F-XXX	DC-1000 MHz	21 thru 40 dB in any 1 dB increment	+/- .5 dB or 2% maximum	1.2:1	BNC, TNC, SMA or N

\* (XXX) insert attenuation value

## Common Specifications

Impedance	Input Power Average	Peak Power	Operating Temperature
50 Ohms	1 Watt	1000 Watts	-55° C to +125° C

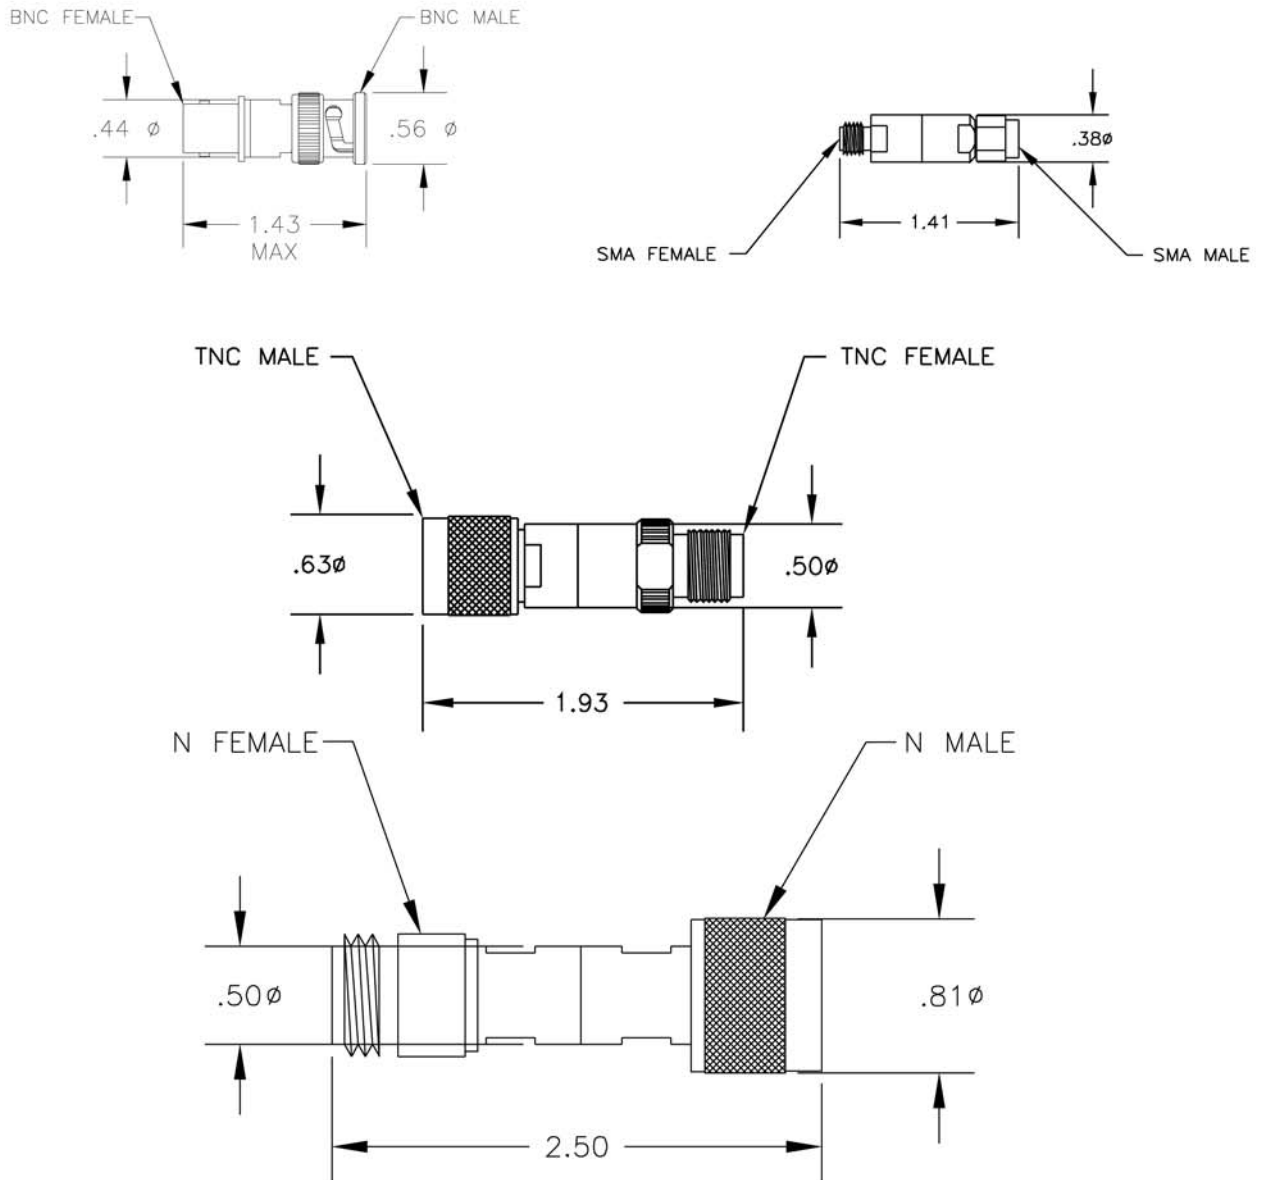

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW