


1500 Watt Fixed Attenuators FHAM Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR Maximum	Cooling Fan Voltage	RF Connectors
50FHAM-XX-X-1500	DC - 2400 MHz	3, 6, 10, 20, or 30 dB	3dB +/- .5 dB DC-1000 MHz +/- 1.1 dB 1000-2400 MHz 6dB +/- .5 dB DC-1000 MHz +/- 1.1 dB 1000-2400 MHz 10dB +/- .6 dB DC-1000 MHz +/- 1.5 dB 1000-2400 MHz 20dB +/- .7 dB DC-1000 MHz +/- 1.5 dB 1000-2400 MHz 30dB +/- .8 dB DC-1000 MHz +/- 1.5 dB 1000-2400 MHz	1.10:1 DC-1000 MHz 1.25:1 1000-2400 MHz	12 Vdc - A 24 Vdc - B 110 VAC - C 220 VAC - D	N, TNC or 7/16

* (XXX) insert attenuation value.

** (X) Example Model: 50FHAM-03-A-1500N is a 3 dB, N male to N female, 1500 Watt attenuator with cooling fans that run off of a 12 Vdc voltage supply.

Model	Impedance	Input Power Average	Operating Position	Operating Temperature
50FHAM-XX-X-1500	50 Ohms	1500 Watts @ +25° C derate to 50 Watts @ +125° C	any position except mounting plate up	0° C to +125° C

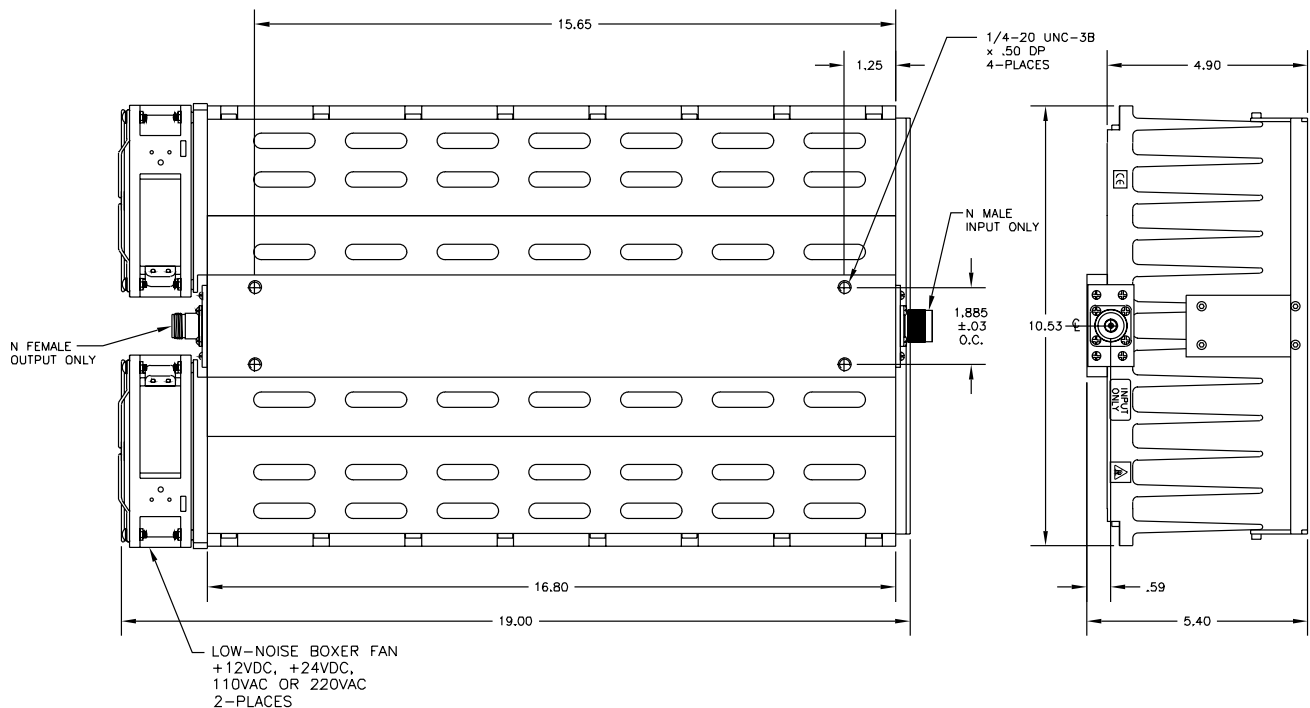

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW