


1000 Watt Terminations

Model	Impedance	Frequency Range	VSWR Tolerance	Input Power	Operating Temperature	RF Connectors
50T-298	50 Ohms	DC-2400 MHz	DC-1000 MHz 1.10:1 maximum 1000-2400 MHz 1.25:1 maximum	1000 Watts average at 25° C Derated linearly to 50 Watts @ 125° C	-25° C to +125° C	N, TNC, or 7/16 (male or female)

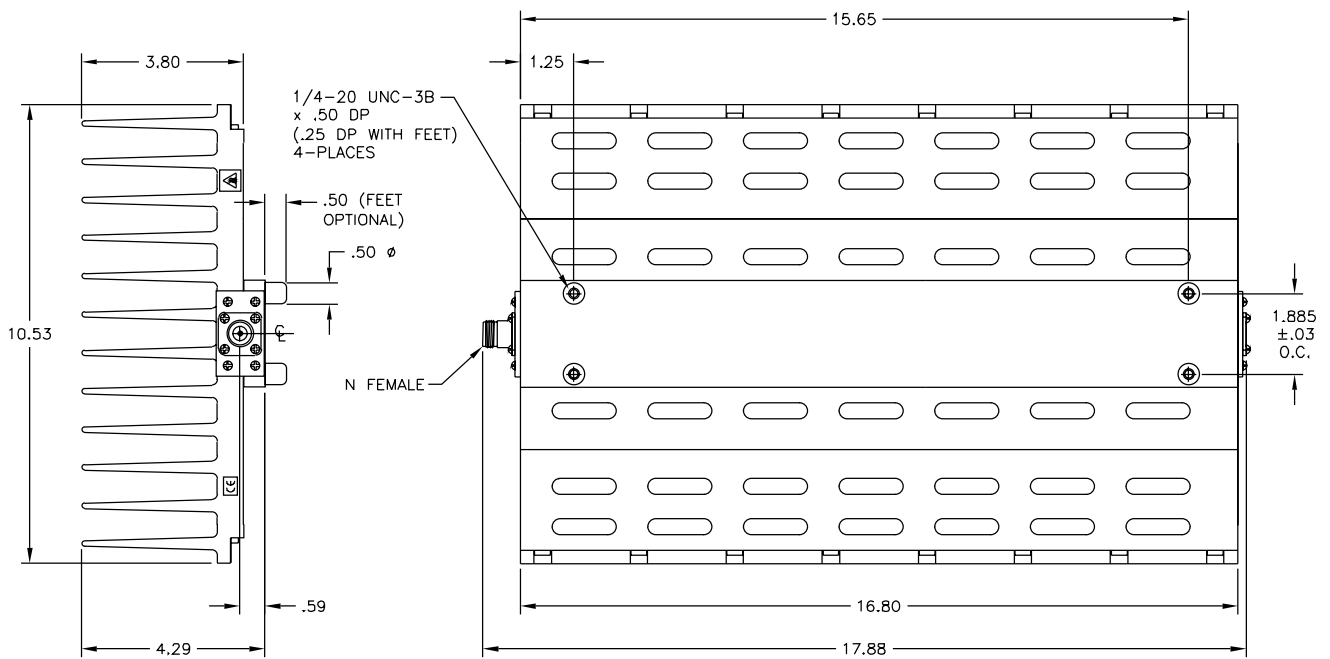

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW

S-6-F
11-09-04
Cat 2004