Dual Concentric Rotary Attenuators

Model	Frequency Range	Attenuation Range	Attenuation Accuracy	VSWR	Insertion Loss
75DR-006	DC-600 MHz	0-80 dB in 1 dB steps	+/- .1 dB 0-10 dB +/- .3 dB 10-80 dB DC-100 MHz +/- .2 dB 0-10 dB +/- .6 dB 10-80 dB 100-400 MHz +/- .3 dB 0-10 dB +/- .8 dB 10-80 dB 400-600 MHz	1.3:1 maximum	.75 dB maximum
75DR-009	DC-1000 MHz	0-70 dB in 1 dB steps	+/- .5 dB or 3%	1.4:1 maximum	.75 dB maximum

Common Specifications

Impedance	RF Input Power	Operating Temperature	Standard Rotation	Indexing	RF Connectors
75 Ohms	1 Watt average 1000 Watts peak	-20° C to +85° C	Attenuation increases in clockwise direction	30 degrees with stops at minimum and maximum	BNC, F or N female

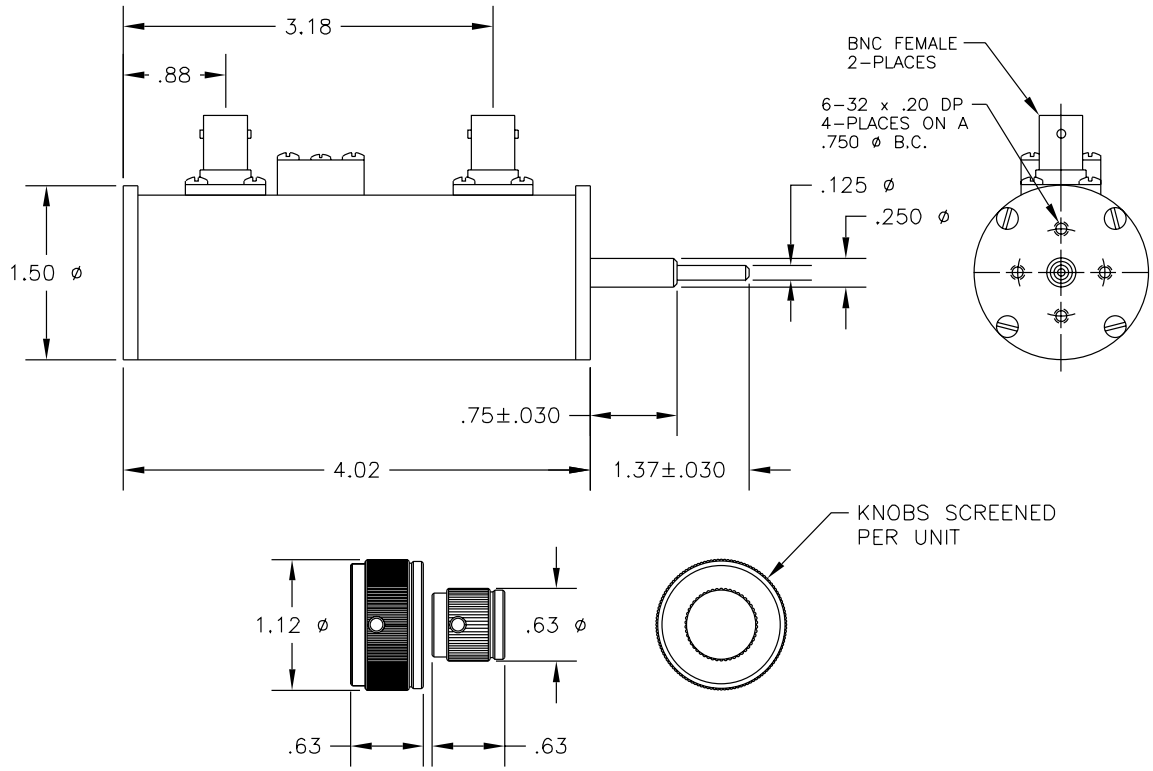

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW