


75 Ohm Fixed Attenuators F Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR Maximum	RF Connectors
75F-XXX	DC-500 MHz	1 thru 30 dB in any 1 dB increment	+/- .2 dB DC-100 MHz +/- .4 dB 100-500 MHz	1.3:1	BNC
75F-XXX	DC-1000 MHz	1 thru 20 dB in any 1 dB increment	+/- .3 dB DC-500 MHz +/- .5 dB 500-1000 MHz	1.2:1 @ 500 MHz 1.3:1 @ 1000 MHz	N or F (Screw On)
75F-XXX	DC-1000 MHz	1 thru 20 dB in any 1 dB increment	+/- .1 dB DC-30 MHz +/- .3 dB 30-500 MHz +/- .5 dB 500-1000 MHz	1.15:1 @ 500 MHz 1.3:1 @ 1000 MHz	TNC
75F-XXX	DC-1450 MHz	1 thru 20 dB in any 1 dB increment	+/- .3 dB DC-500 MHz +/- .5 dB 500-1000 MHz +/- .5 dB or 5% 1000-1450 MHz	1.2:1 @ 500 MHz 1.3:1 @ 1000 MHz 1.4:1 @ 1450 MHz	F (Push On)

* (XXX) insert attenuation value

Common Specifications

Impedance	Input Power Average	Peak Power	Operating Temperature
75 Ohms	1 Watt	1000 Watts	-55° C to +125° C

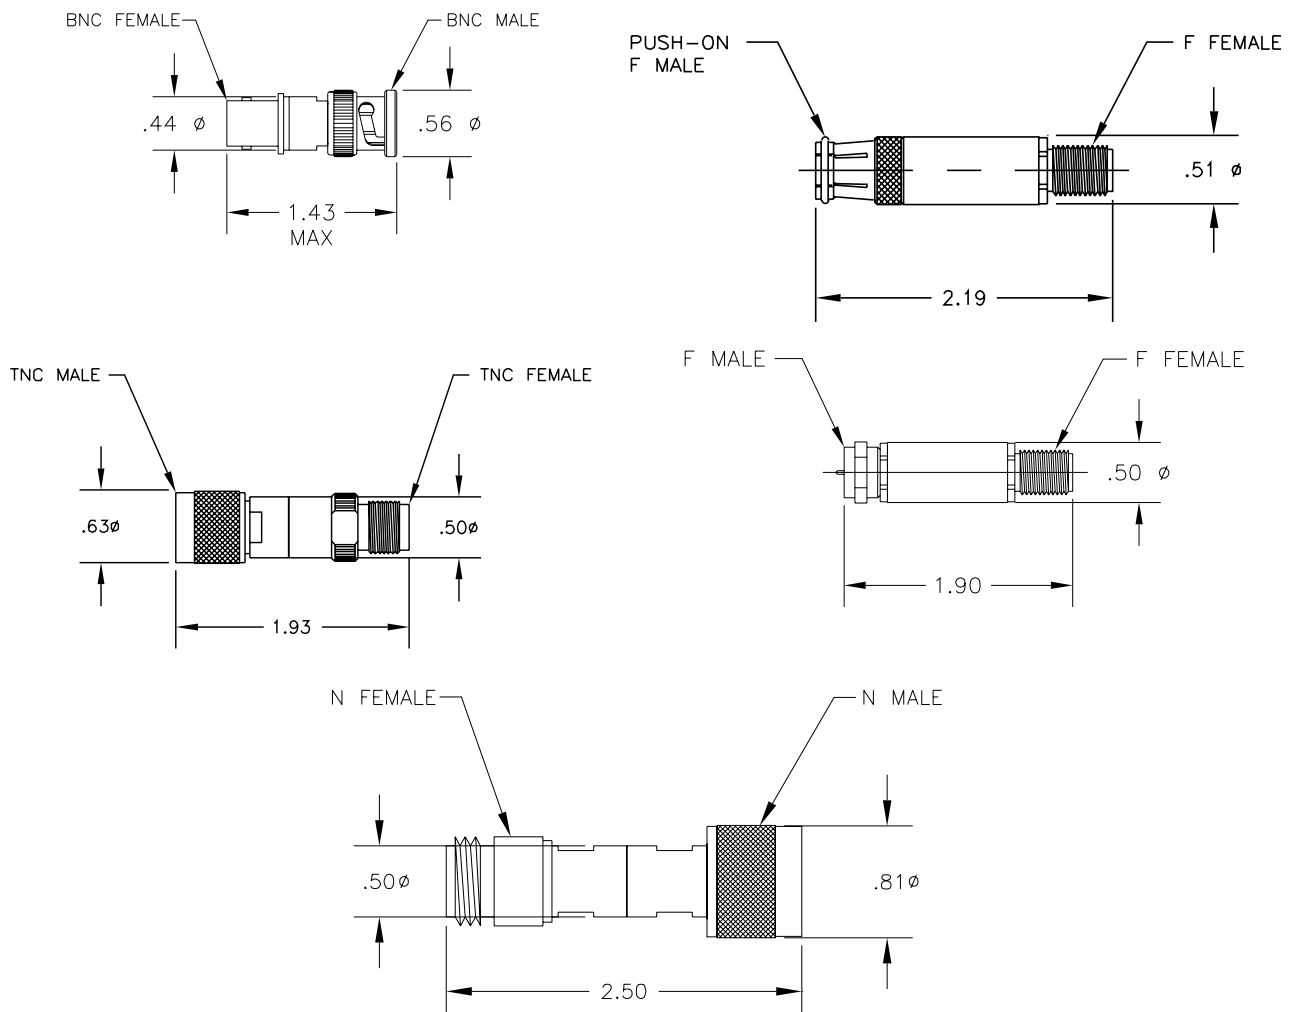

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW