
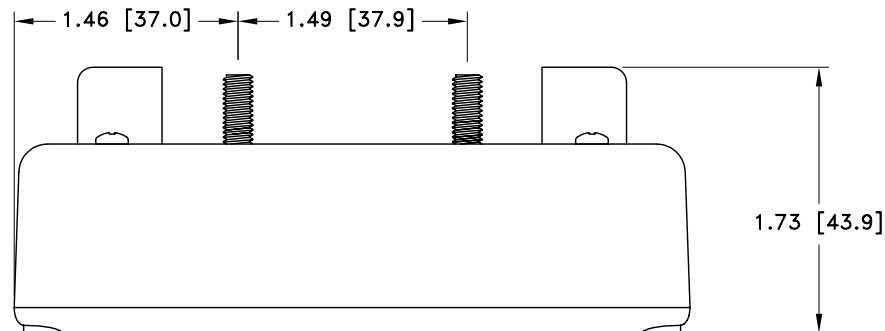
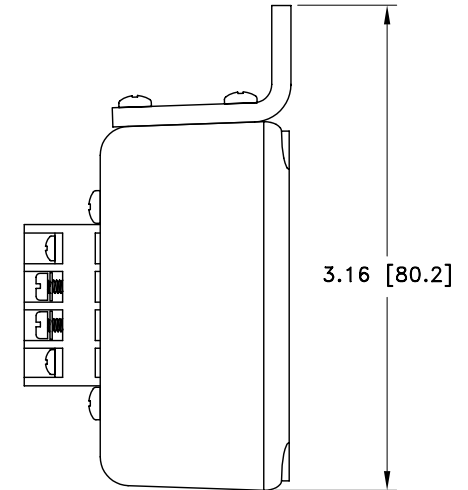


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
D	12/17/99 <sup>SH</sup>	M.M	P.H	R.M
E	01/17/01 <sup>IB</sup>	KCB	PH	RM
F	12/02/02 <sup>SH</sup>	LC	PH	LJ

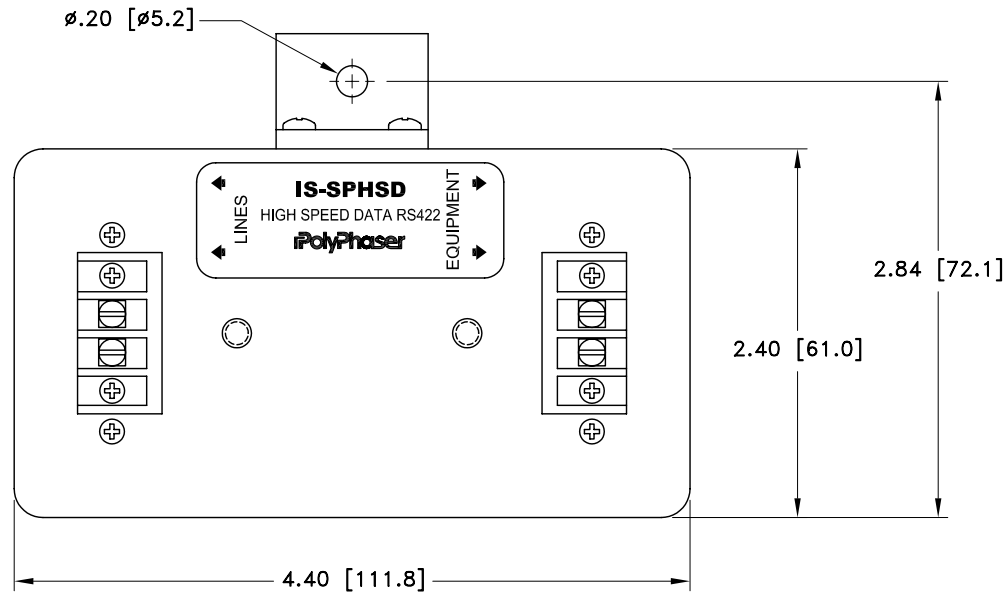


MAXIMUM CHARACTERISTICS

SURGE:  
 36kA IEC 1000-4-5 8/20μS  
 WAVE FORM  
 TURN-ON:  
 +2.8/-0.6 ±10% @ 10mA  
 RESISTANCE:  
 1Ω  
 CAPACITANCE:  
 30pF  
 SURGE ENERGY:  
 425J  
 BAND WIDTH:  
 95MHz

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 12/05/95	 P.O. BOX 9000 MINDEN, NY 89423 TEL: 775-782-2511 FAX: 775-782-4476 IS-SPHSD CUSTOMER PRINT			
MECH ENGINEER O. AKDAG	DATE 12/05/95				
ELEC ENGINEER T. KULBIEDA	DATE 12/05/95				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 12/05/95	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.25	SHEET 1 OF 1