


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.


REVISIONS					
REV LTR	DATE	ENG	MKTG	Q.A.	
D	01/10/01	IB	KCB	PH	RM
E	05/23/02	IB	JJ	SJ	RM
F	12/03/02	IB	LC	SD	LJ

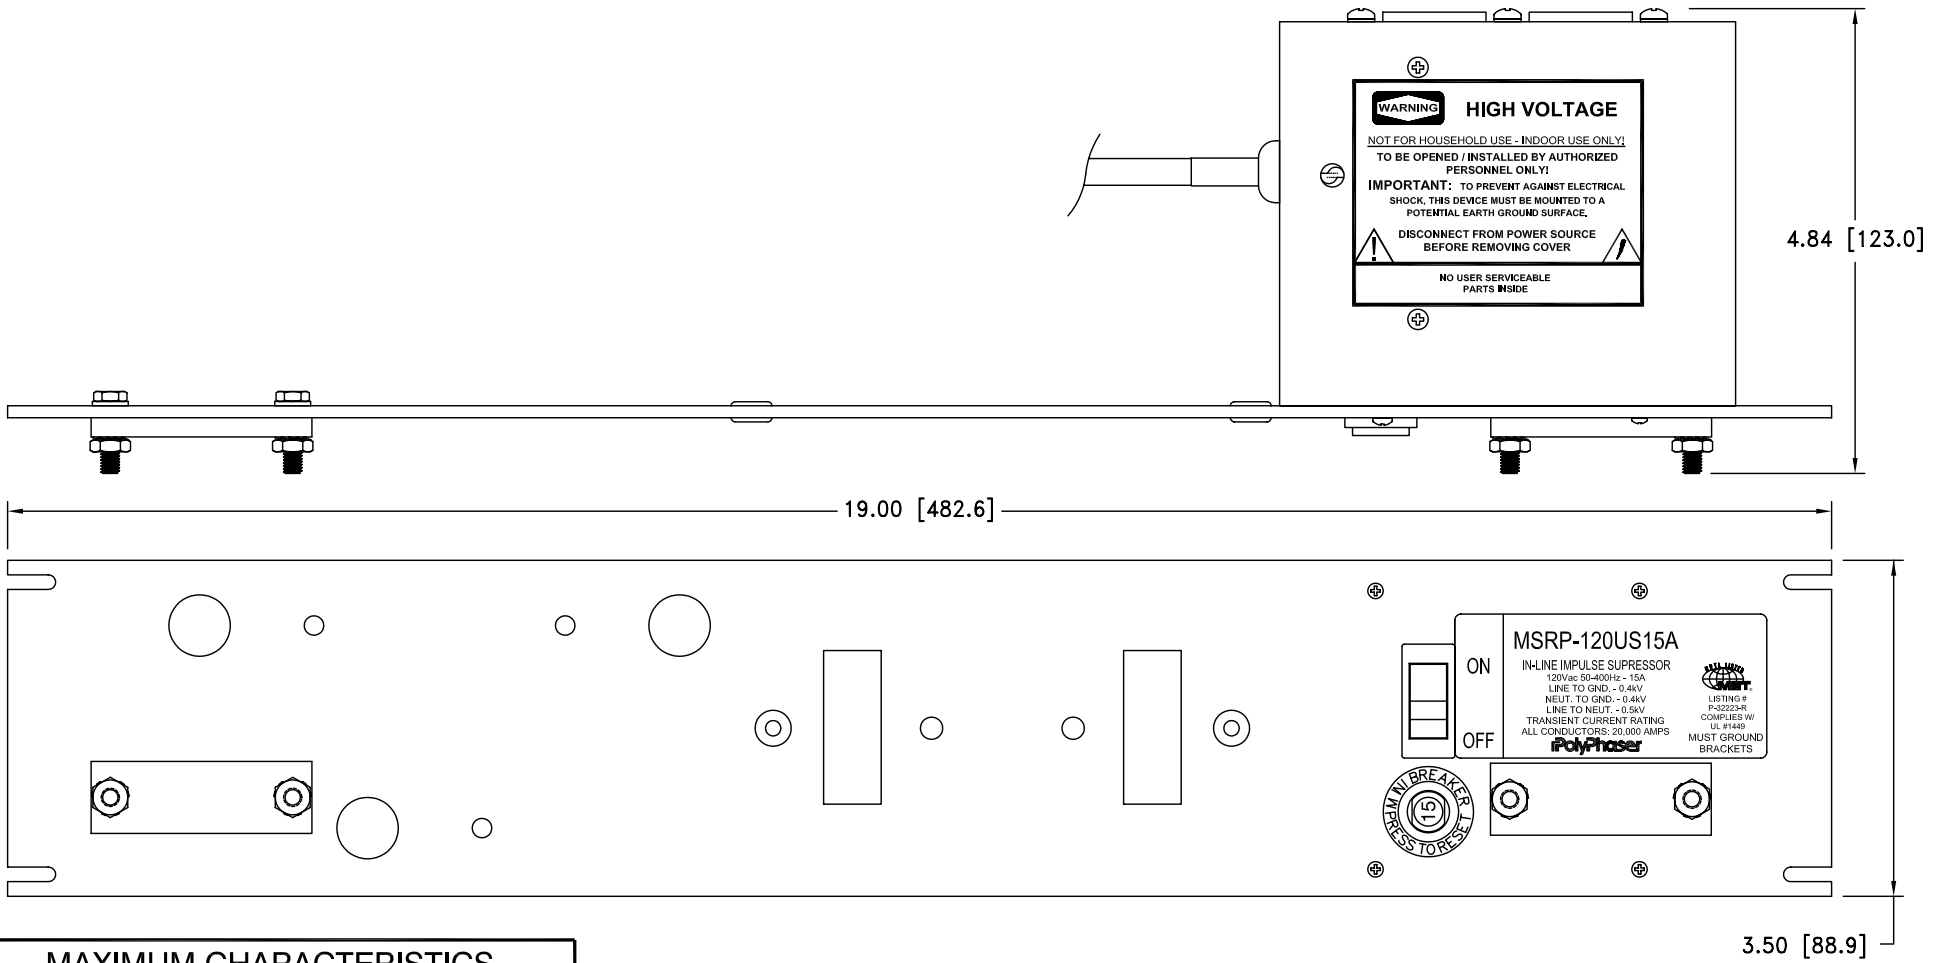

MAXIMUM CHARACTERISTICS
SURGE: 20kA IEC1000-4-5 8/20μs WAVEFORM 800J
TURN-ON: 200Vdc
EMI/RFI FILTERING: (MEASURED TO MIL-STD-220)
-50dB @ 5MHz
-55dB @ 70MHz
-45dB @ 140MHz
SURGE LET-THROUGH VOLTAGE: IEC 1000-4-5 8/20μs WAVEFORM
400Vp TO 10kA, 600Vp TO 20kA
TEMPERATURE: +5°C TO +40°C STORAGE/OPERATING +40°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 11/13/96	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION MSRP-120US15A CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER L. CHANG	DATE 11/20/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 11/20/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1