



ALL DESIGN, OPERATE AND PROCESS DATA PERTAINING TO THIS DRAWING IS THE PROPERTY OF POLYPHASER CORPORATION. THIS INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OTHERS OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

**MAXIMUM CHARACTERISTICS**

SURGE:  
 20KA IEC1000-4-5 8/20us WAVEFORM 800J  
 TURN-ON:  
 200Vdc  
 EMI/RFI FILTERING: (MEASURED TO MIL-STD-220)  
 -50dB @ 5MHZ  
 -55dB @ 70MHZ  
 -45dB @ 140MHZ  
 SURGE LET-THROUGH VOLTAGE:  
 IEC 1000-4-5 8/20us WAVEFORM  
 400Vp TO 10KA, 600Vp TO 20KA  
 TEMPERATURE:  
 +5°C TO +40°C STORAGE/OPERATING +40°C

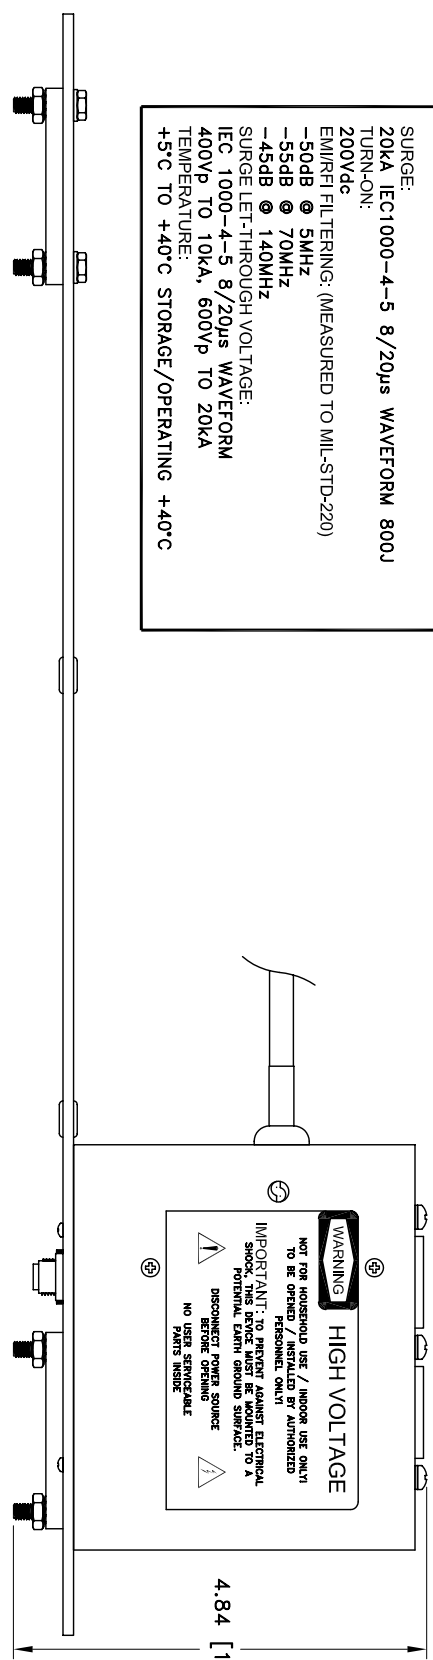

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	02/20/98 Jc	KCB	--	RM
B	03/10/99 Jc	AG	TF	RM
C	01/10/01 lb	KCB	PH	RM

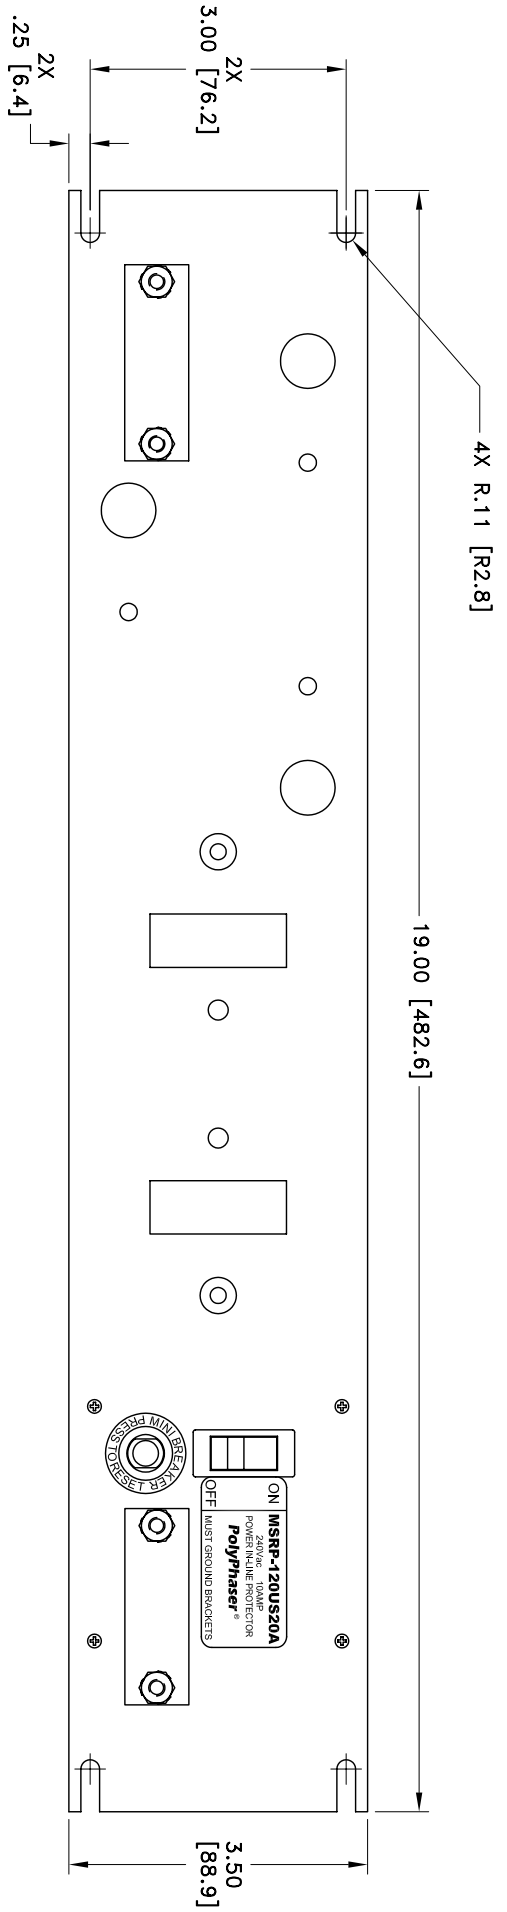

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_  
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAWN	C. GASPARINI	DATE	11/11/96	<b>PolyPhaser®</b> MSRP-120US20A CUSTOMER PRINT
MESH ENGINEER	---	DATE	---	
ELEC ENGINEER	L. CHANG	DATE	11/18/96	
MARKETING	---	DATE	---	
QUALITY DEPT	R. MATHEUS	DATE	11/20/96	CAGE CODE FILE NAME 61114 -C1
P.O. BOX 9000, MINDEN, NY 88423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO./PART NO./DESCRIPTION				SCALE SHEET 1/2.25 1 OF 1