


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	03/09/99 ^{JC}	AG	TF	RM
B	03/14/01 ^{IB}	KCB	PH	RM

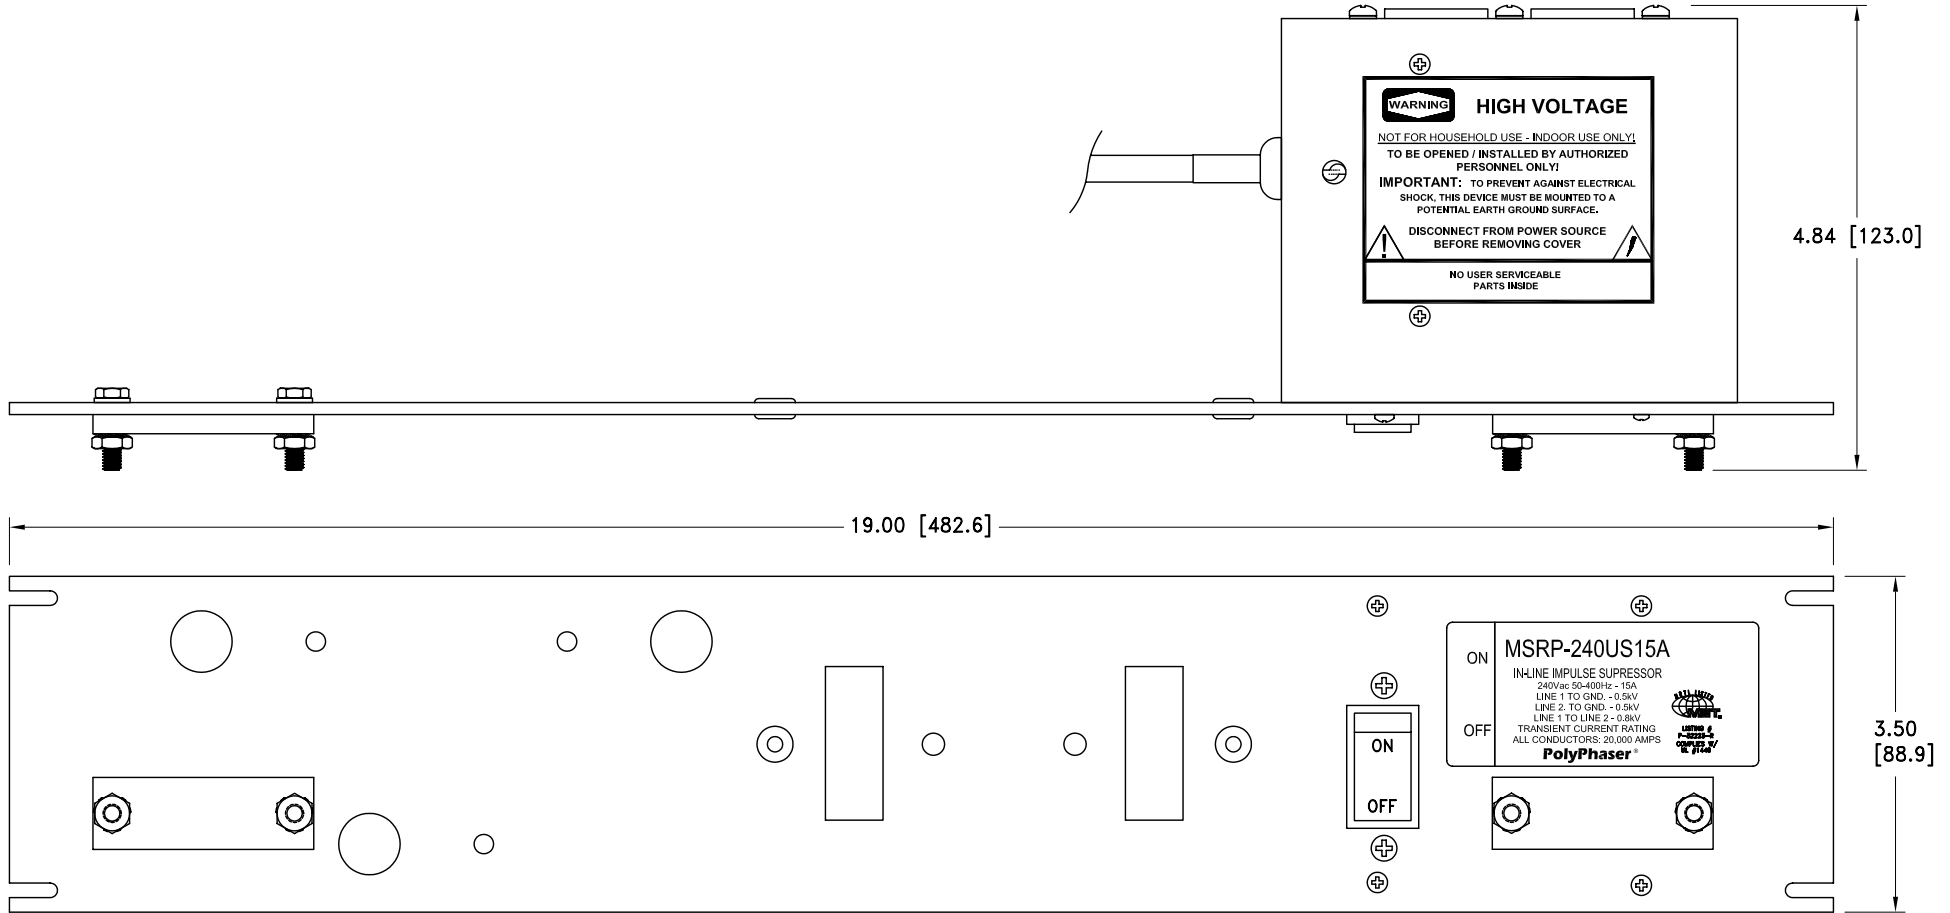

MAXIMUM CHARACTERISTICS

SURGE:
 20kA IEC 1000-4-5 8/20 μ s WAVEFORM 1.4kJ
TURN-ON:
 370Vdc
EMI/RFI FILTERING: (MEASURED TO MIL-STD-220)
 -50dB @ 5MHz
 -55dB @ 70MHz
 -45dB @ 140MHz
SURGE LET-THROUGH VOLTAGE:
 IEC 1000-4-5 8/20 μ s WAVEFORM
 700Vp TO 10kA, 1000Vp TO 20kA
TEMPERATURE:
 +5°C TO +40°C STORAGE/OPERATING +40°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 11/13/96	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION MSRP-240US15A CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER L. CHANG	DATE 11/20/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 11/20/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1