



This Document is the property of AML Communications, Inc. The information contained in this Document shall not be reproduced, copied, released or made available to any third parties without prior written authorization. Utilizing information contained in this Document for manufacture or sale of products without prior written authorization is strictly prohibited.

REVISIONS				
ECC#	REV	DESCRIPTION	DATE	APPROVED
	-	RELEASE	2/26/04	M. CALAYAN

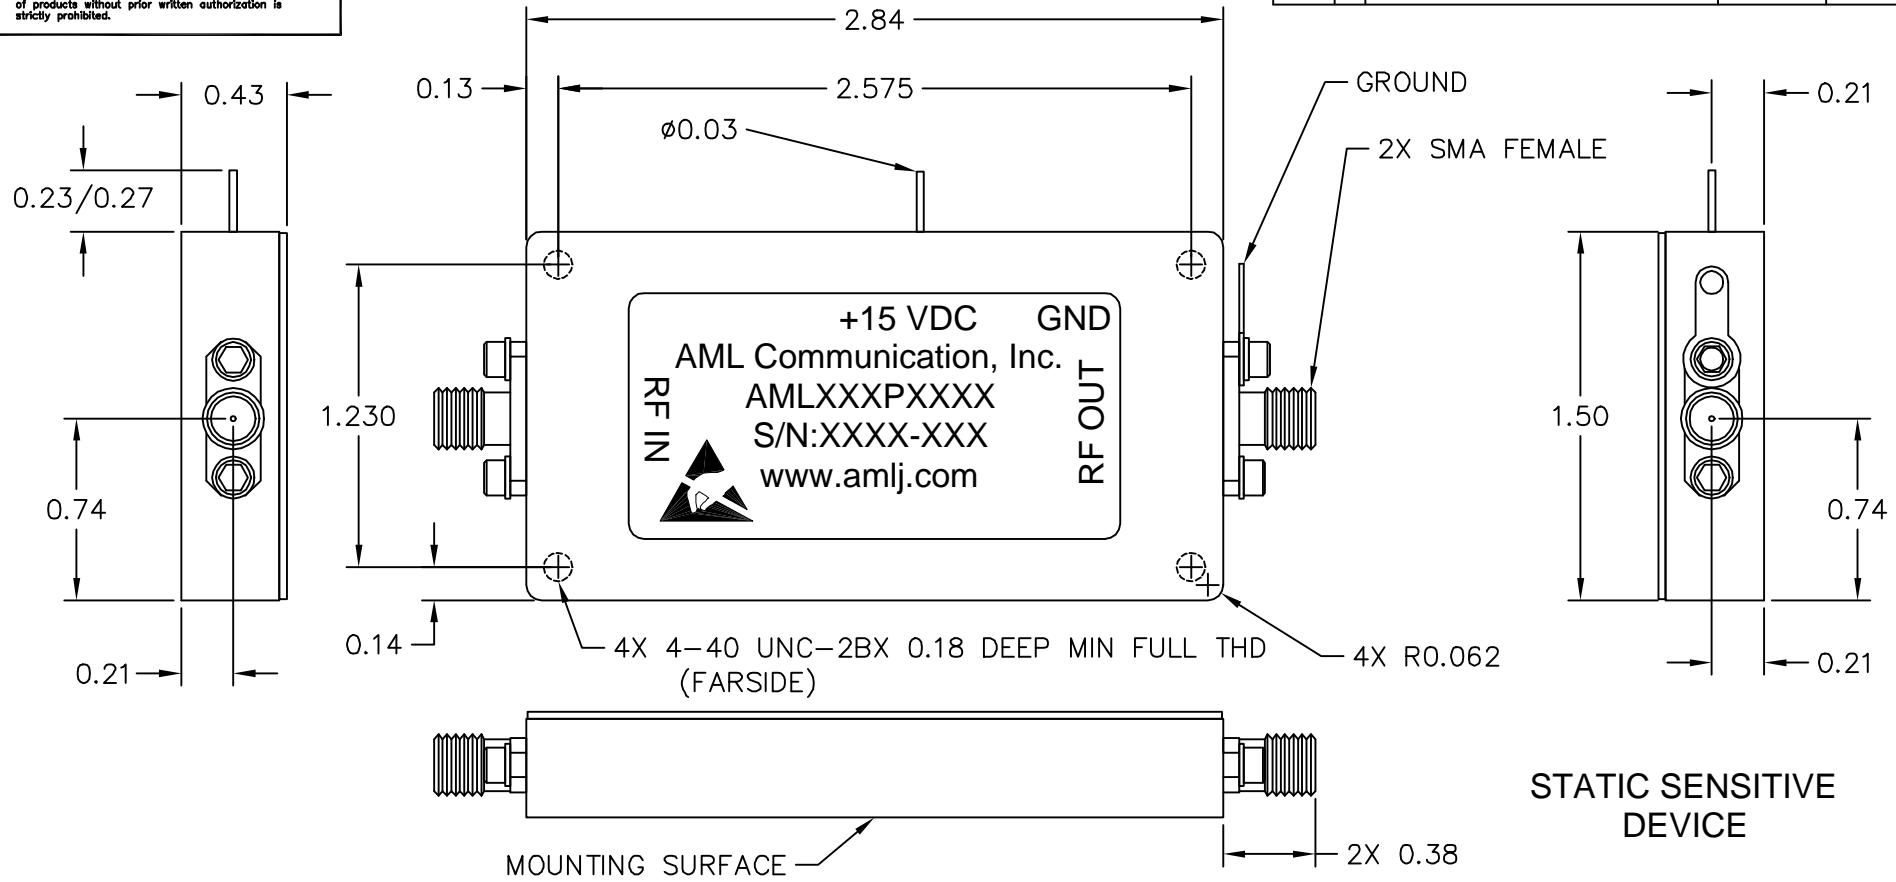

NOTES:

1. MARK LABEL AS SHOWN. MARK SERIAL NUMBER AND DATE CODE AS DEFINED BY TRAVELER.
2. UNIT MUST BE MOUNTED TO A SUITABLE HEATSINK DURING OPERATION.
3. THE USE OF THERMALLY CONDUCTIVE GREASE BETWEEN THE HEATSINK AND AMPLIFIER IS RECOMMENDED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS .XXX ± 0.01 XXX ± 0.005	THIRD ANGLE PROJECTION	DRAWN BY SH	CHECK BY SH	TITLE: OUTLINE, KP8 K-BAND, 2 WATT, CATALOG	SCALE: 1:1	DATE: 2/26/04	 CAMARILLO, CALIFORNIA, USA BOM NUMBER
		DESIGNED BY SH	APPROVED				
MATERIAL ALUM ALLOY, 6061		ENGR		GENERAL FABRICATION NOTES: (UNLESS OTHERWISE SPECIFIED) 1. REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX. 2. DIMENSION(S) APPLY AFTER FINISH. 3. $\sqrt{63}$ MAX. MACHINE FINISH. 4. INTERPRET DRAWING PER ANSI/ASME Y14.5M-1994	SHEET NUMBER 1 OF 1	SIZE B	
FINISH NICKEL PLATE PER MIL-C-26074		MFG ENGR					
DO NOT SCALE DRAWING		QA					DRAWING NUMBER 002-0388