
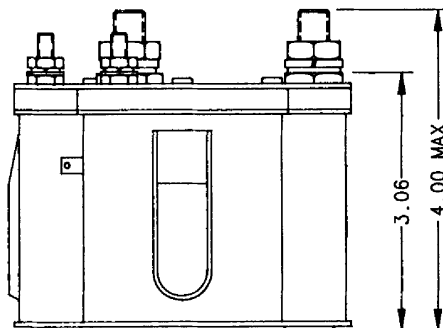


A-701D SPST N.O., 400 Amps, 28 VDC, Cutout Reverse Current


Features:

- SPST N.O. Main Contacts
- Economizing Coil
- 28 VDC
- 400 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

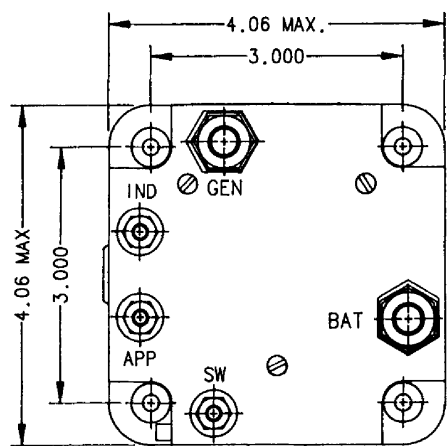

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

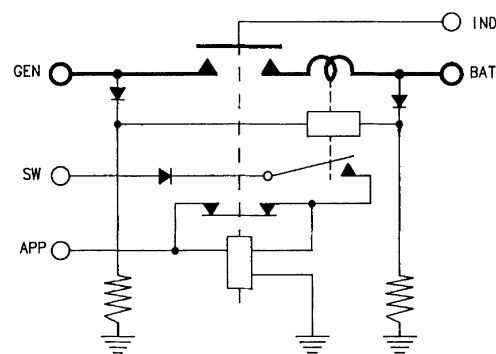

Notes:

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	28 VDC
Current (Resistive)	400 Amps
Main Contactor Coil:	
Duty Cycle (SEE NOTE)	Continuous (Economizing)
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	.5 - 7 VDC
Coil Current @ +25°C	
Pick-Up	3.75 Amp
Hold	0.35 Amp
Differential Voltage Coil:	
Positive Drop-Out (+BAT, -CASE)	22 VDC
Differential Voltage Pick-Up +GEN to BAT	.4 ±25 VDC
Unexcited Bus Pick-Up (+GEN, -CASE)	18 - 24 VDC
Reverse Current Drop-Out (+BAT to GEN)	25 - 50 Amps
Weight Maximum	3 Lbs. 10 Oz.

NOTE: Intermittent coil duty with voltage applied to APP.

TYPICAL APPLICATION: Reverse current protection for 1000 ampere DC starter/generators and/or transformer rectifier units.

Contact Hartman for a detailed Theory of Operation.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.