



A-772XTB SPST N.O., 200 Amps, 28 VDC

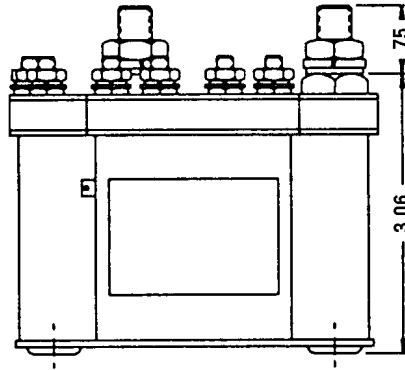


Features:

- SPST N.O. Main Contacts
- Delayed Drop-Out
- Bi-Directional Current Sensing
- Override Feature
- Remote Reset Feature
- 28 VDC
- 200 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

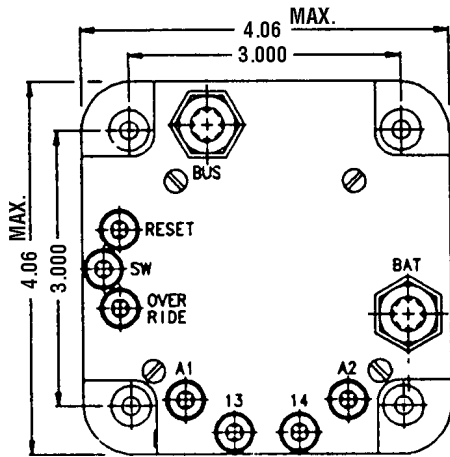

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

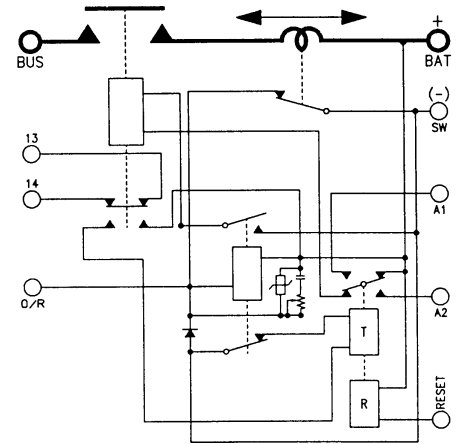

Notes:

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	28 VDC
Current (Resistive)	200 Amps
Auxiliary Contacts:	
Configuration	SPST N.C.
Voltage (Nominal)	28 VDC
Current	
Resistive	5 Amps
Inductive	3 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1 - 7 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	0.32
Hold	0.32
Operating Temperature	-55°C to +71°C
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight Maximum	2 Lbs. 13 Oz.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.

Additional Information: Trip Point – 300 Amps ±10%; Time Delay – 1 Second ±10%
Consult HARTMAN product team for Detailed Theory of Operation.