


**B-178 3PST,
60 Amps, 120/208 VAC, 400 Hz**

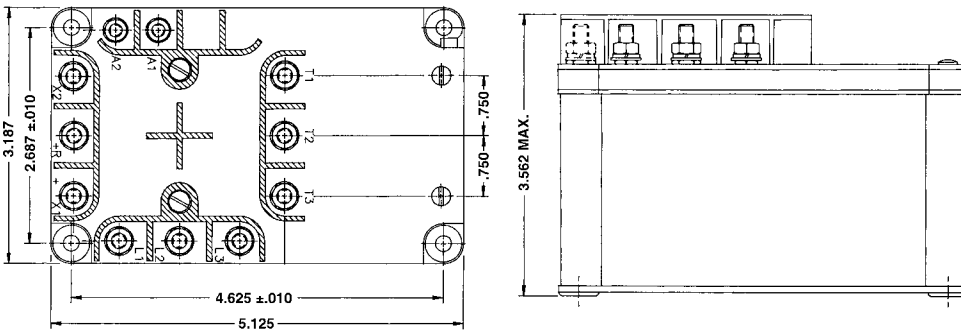


Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

Features:

- 3PST Main Contacts
- Phase Sensor
- Electrical Reset
- 120 VAC, 400 Hz
- 60 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

CONTACTOR CONFIGURATION

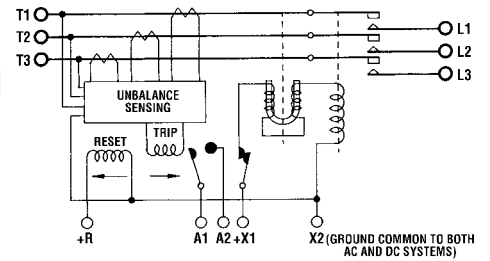

Notes:

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	3PST N.O.
Voltage (Nominal)	120/208 VAC, 400 Hz
Current (Resistive)	60 Amps
Auxiliary Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	28 VDC
Current (Resistive)	2 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	28 VDC
Operate Voltage	18 - 28 VDC
Reset Voltage	18 - 28 VDC
Operating Temperature	-54°C to +74°C
Weight	2 Lbs. 6 Oz.
Trip (Current Unbalance)	10 - 15 Amps

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.