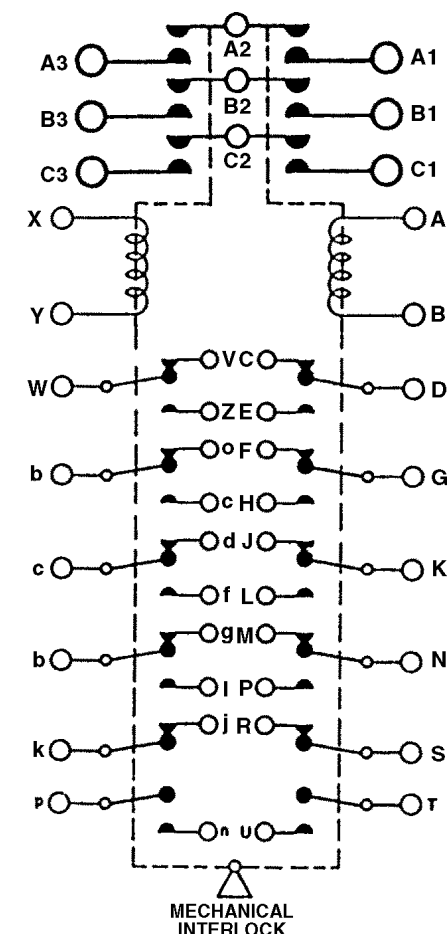


B-227 3PDT, Center Off, 60 Amps, 115/200 VAC, 400 Hz

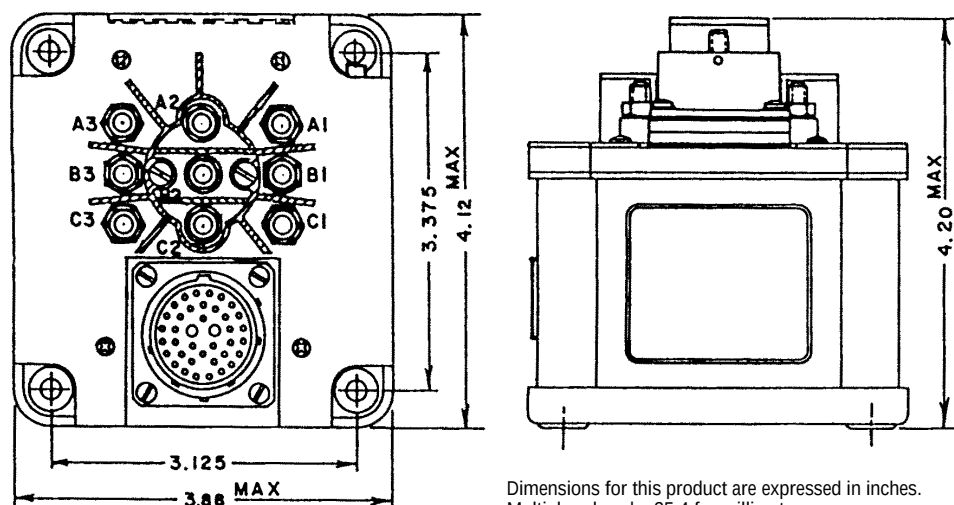

Features:

- 3PDT Center Off Main Contacts
- Mechanically Interlocked
- 115/200 VAC, 400 Hz
- 60 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

CONTACTOR CONFIGURATION

Notes:

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.



Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	3PDT Center Off
Voltage (Nominal)	115/200 VAC, 400 Hz
Current (Resistive)	60 Amps
Auxiliary Contacts:	
Configuration	8-SPDT, 2-SPST N.O., 2-SPST N.C.
Voltage (Nominal)	28 VDC or 115 Volts, 400 Hz
Current	
Resistive	5 Amps
Inductive	2 Amps
Lamp	1 Amp
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1 - 7 VDC
Coil Current @ 28 VDC & +25°C	0.37 Amps Max.
Operating Temperature	-55°C to +71°C Maximum
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight	2 Lbs. 8 Oz.