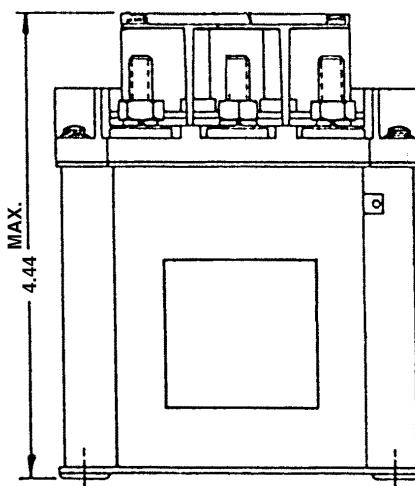
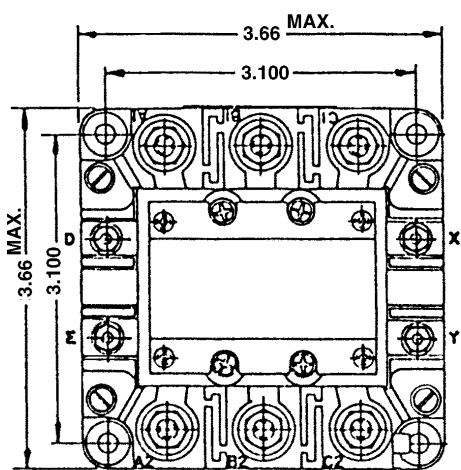
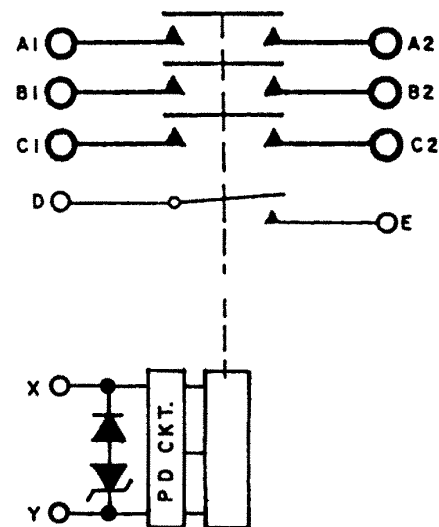


B-312D-1 3PST N.O., 175 Amps, 120/208 VAC, 50/60 Hz


Features:

- 3PST N.O. Main Contacts
- Transient Suppression
- 120/208 VAC, 50/60 Hz
- 175 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

CONTACTOR CONFIGURATION


Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	3PST N.O.
Voltage (Nominal)	120/208 VAC, 47.5 - 63 Hz
Current (Resistive)	175 Amps
Auxiliary Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	115 VAC, 50/60 Hz
Current (Resistive)	5 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	26 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1 - 7 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	5.8 Amps Maximum
Hold	0.5 Amps Maximum
Operating Temperature	-55°C to +71°C
Life:	
Electrical	30,000 Cycles
Mechanical	100,000 Cycles
Weight	2 Lbs. 8 Oz.

Notes:

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.