


BH-125TH 3PST N.O., 250 Amps, 208 VAC, 400 Hz


Features:

- 3PST N.O. Main Contacts
- Hermetically Sealed
- Economizing Coil
- 208 VAC
- 250 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

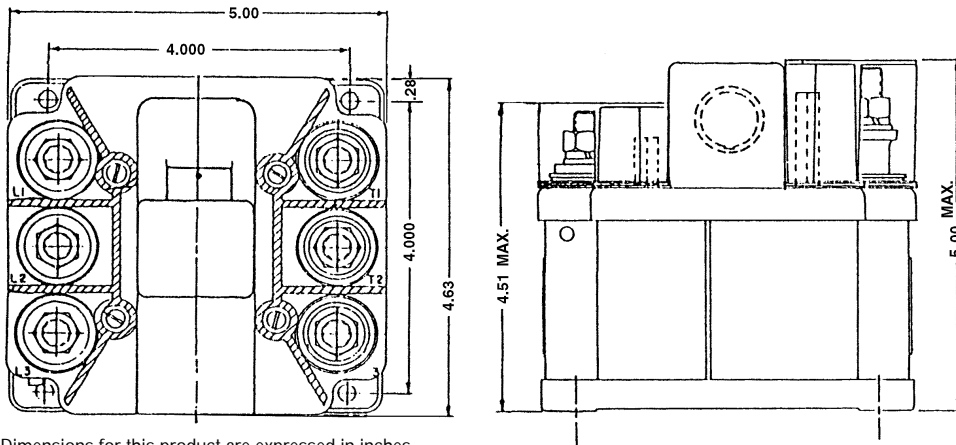

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

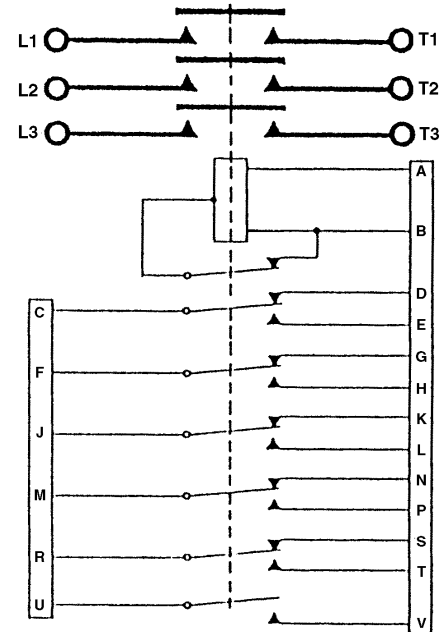

Notes:

PRODUCT SPECIFICATIONS	
Construction	Hermetically Sealed
Main Contacts:	
Configuration	3PST N.O.
Voltage (Nominal)	208 VAC, 400 Hz
Current (Resistive)	250 Amps
Auxiliary Contacts:	
Configuration	1-SPST N.O., 5-SPDT
Voltage (Nominal)	28 VDC or 115 VAC, 400 Hz
Current	
Resistive	10 Amps
Inductive	10 Amps
Lamp	7.5 Amps
Coil Data:	
Duty Cycle	Continuous (Economizing)
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1 - 7 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	4.6 Amps Maximum
Hold	0.3 Amps Maximum
Operating Temperature	-70°C to +100°C
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight	6 Lbs.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.