
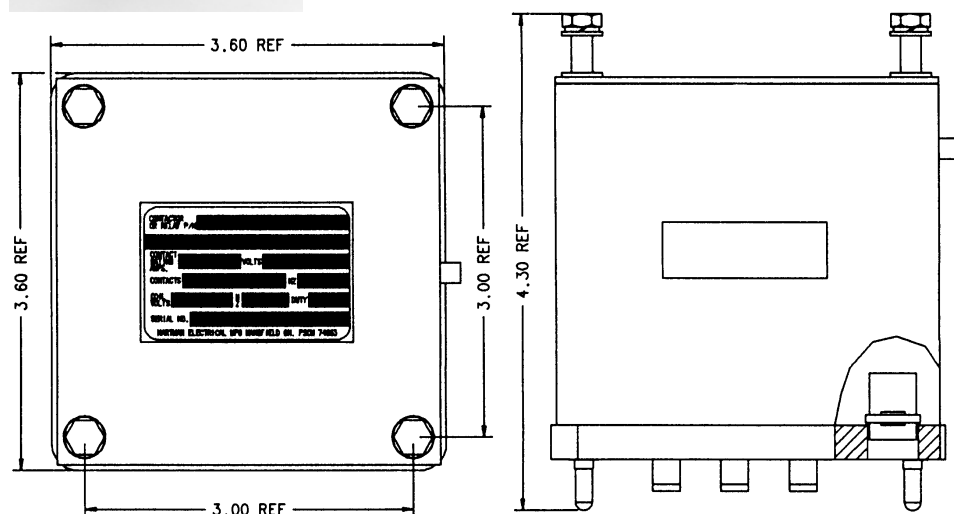


BP-353 3PST N.O., 50 Amps, 115/200 VAC, 400 Hz




Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

Features:

- 3PST N.O. Main Contacts
- Transient Suppression
- Designed for ease of maintenance
- Less than 10μ contact chatter during high vibration
- 115/200 VAC, 400 Hz
- 50 Amps
- High Reliability
- Meets many requirements of MIL-R-6106
- Light Weight Construction

CONTACTOR CONFIGURATION

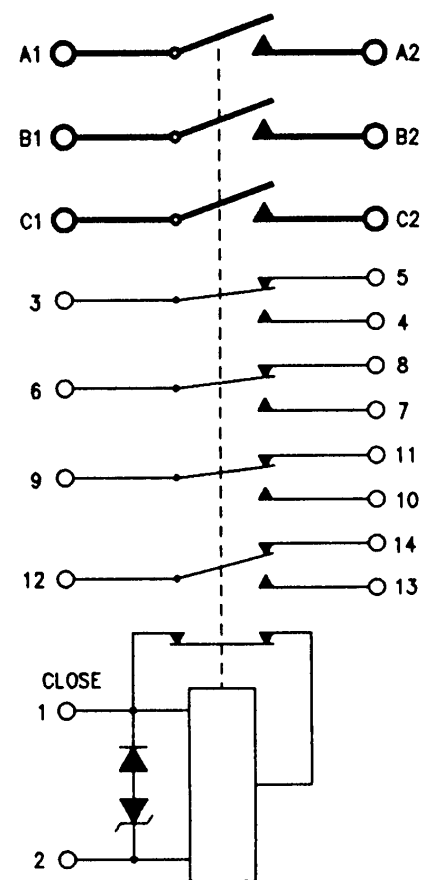

Notes:

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented, Plug-In
Main Contacts:	
Configuration	3PST
Voltage (Nominal)	115/200 VAC, 400 Hz
Current	50 Amps @ 0.7 ± 0.05 pf
Auxiliary Contacts:	
Configuration	4-SPDT
Voltage (Nominal)	28 VDC
Current (Resistive)	4 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1.5 - 7 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	4 Amps Maximum
Hold	0.35 Amps Maximum
Operating Temperature	-15°C to +70°C
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight	2 Lbs.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.