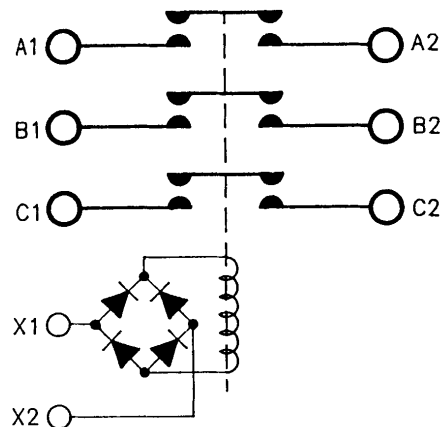
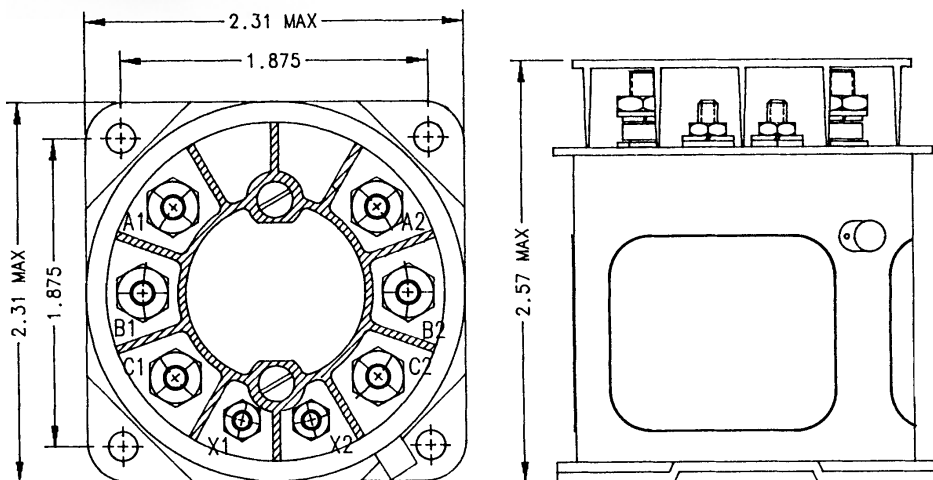


# CR-21A 3PST N.O., Double Break, 5 Amps, 440 VAC, 60 Hz, 380 VAC, 50 Hz


**Features:**

- 3PST N.O. Double Break Main Contacts
- AC Coil
- 440 VAC, 60 Hz or 380 VAC, 50 Hz
- 5 Amps
- High Reliability
- Meets many requirements of MIL-R-6106
- Light Weight Construction

**CONTACTOR CONFIGURATION**

**Notes:**


Dimensions for this product are expressed in inches.  
Multiply values by 25.4 for millimeters.

**PRODUCT SPECIFICATIONS**

|                                |                                |
|--------------------------------|--------------------------------|
| Construction                   | Gasket Sealed, Vented          |
| Main Contacts:                 |                                |
| Configuration                  | 3PST N.O.                      |
| Voltage (Nominal)              | 440 VAC, 60 Hz, 380 VAC, 50 Hz |
| Current (Resistive)            | 5 Amps                         |
| Coil Data:                     |                                |
| Duty Cycle                     | Continuous                     |
| Voltage (Nominal)              | 90 - 125 VAC, 60 Hz            |
| Pick-Up Voltage                | 90 VAC Maximum                 |
| Drop-Out Voltage               | 15 - 50 VAC                    |
| Coil Current @ 125 VAC & +25°C |                                |
| In-Rush                        | .48 Amp                        |
| Hold                           | .48 Amp                        |
| Operating Temperature          | -55°C to +71°C                 |
| Life:                          |                                |
| Electrical                     | 50,000 Cycles                  |
| Mechanical                     | 100,000 Cycles                 |
| Weight                         | 6.8 Oz.                        |

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.  
HARTMAN and TYCO are trademarks.