


E-308AA SPDT, 7.5 Amps, 120 VDC


Features:

- SPDT Main Contacts
- 60 Hz, 3 Phase Under Voltage Sensing
- 120 VAC
- 7.5 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

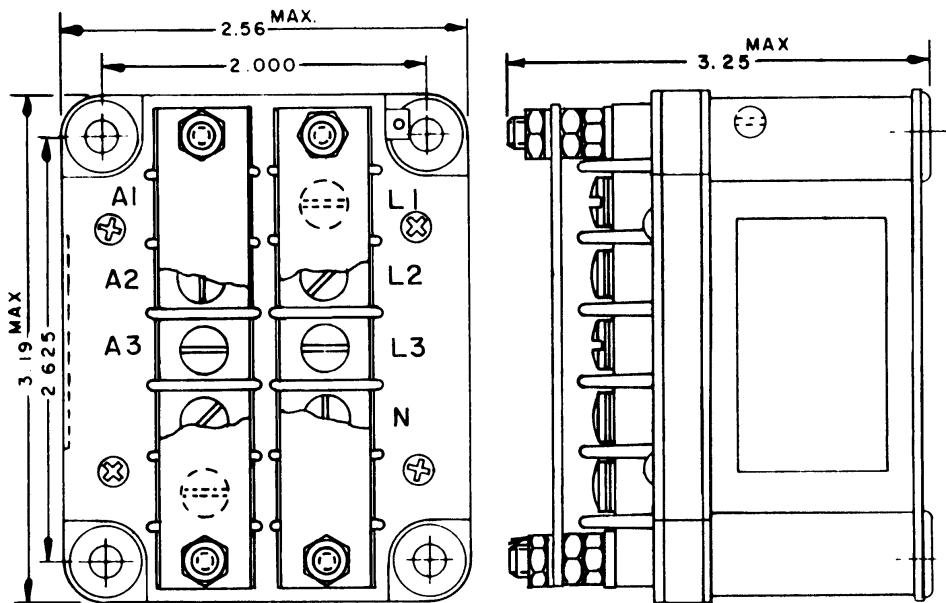

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

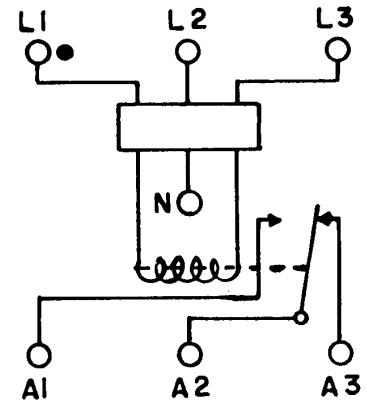

Notes:

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed
Operating Voltage	120V, 60 Hz, 3 Phase
Pick-Up Voltage (3 Phase Average)	110 Volts Maximum
Drop-Out Voltage	100 ±5 Volts
Contact Rating	7.5 Amps Resistive at 28 VDC
Environmental	MIL-E-5400P CAT IA
Temperature Operating	-55°C to +71°C
Weight Maximum	12 Ozs.
Rated Duty	Continuous

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.