



E-384 SPDT, 3 Amps, 28 VDC

Features:

- SPDT Main Contacts
- Under Frequency Sensor
- 28 VDC Coil
- 28 VDC
- 3 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

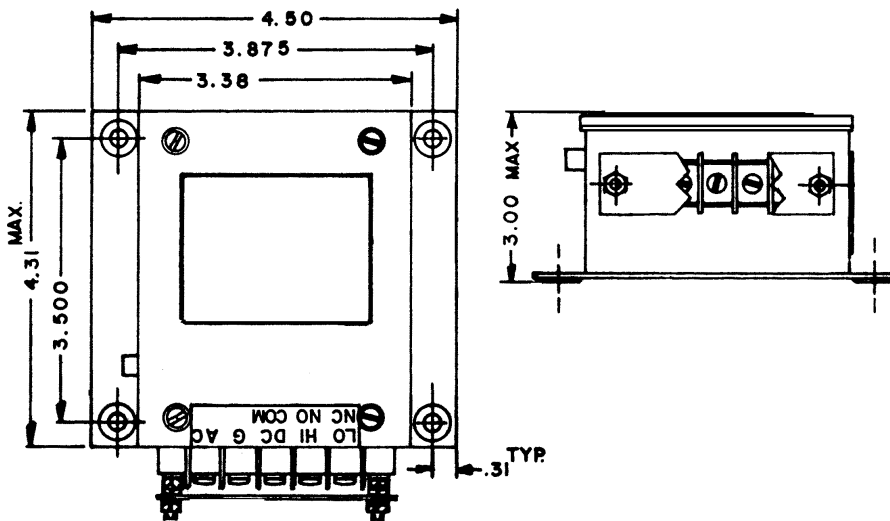

CONTACTOR CONFIGURATION

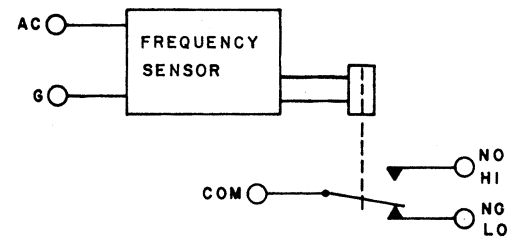

Notes:

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

PRODUCT SPECIFICATIONS	
AC Input Voltage Range	115 Volts AC 30 - 150 Volts AC
Frequency Range	100 - 1000 Hz
Contact Rating	3 Amps Inductive Load at 28 VDC
Operating Characteristics:	
"Lo" Contacts Close	360 ±5 Hz
"Hi" Contacts Close	360 ±5 Hz
Environmental:	
Temperature Range	-54°C to +71°C
Vibration	10 - 55 Hz at .060 In. Total Excursion
Maximum Power Input Required	15 Volt-Amperes A.C.
Duty Cycle	Continuous
Minimum Operating Life Cycles	10,000
Weight Maximum	15 Oz.
Designed to withstand transient voltage to 300 volts peak for a period of 40 milliseconds.	

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.