



QR-50DA SPST, .25 Amp, 115 VAC

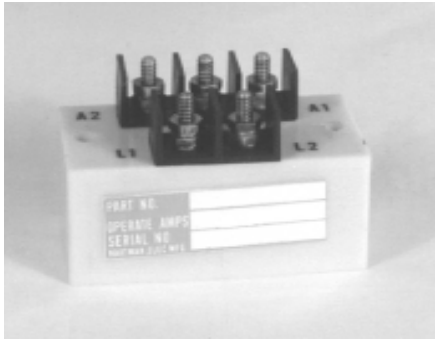


Features:

- SPST Main Contacts
- Current Indicator
- Epoxy Encapsulated
- 115 VAC
- .25 Amp
- High Reliability
- Meets many requirements of MIL-R-6106
- Light Weight Construction

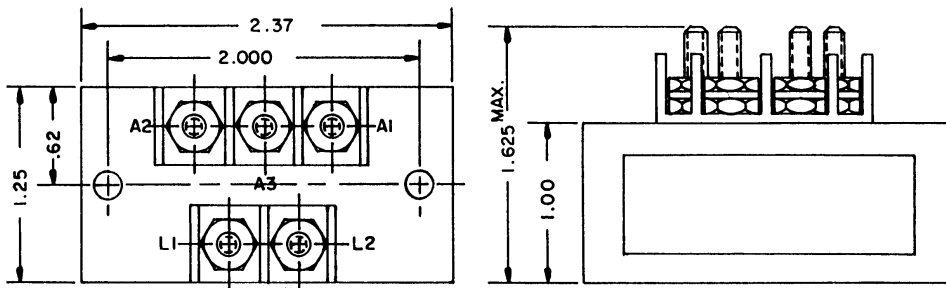

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

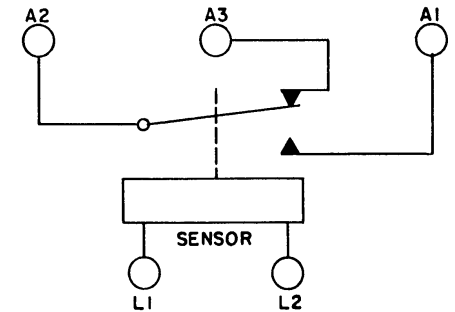

PRODUCT SPECIFICATIONS	
Operating Characteristics	
Operating Voltage	115 VAC, 1 Phase, 400 Hz
Pick-Up	0.3 ±.1 Amp AC
Continuous	3 Amps AC Maximum
Contact Rating	.25 Amp 28 VDC
Lamp Load	.080 Amp 28 VDC
Temperature	-55°C to +71°C
Vibration	10 G'S to 500 Hz
Altitude	50,000 Feet Maximum
Weight Maximum	4 Oz.

Notes:

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.