



SA106E 3PDT, 30 Amps, 115 VAC, 400/60 Hz

Features:

- 3PDT Main Contacts
- AC Coil
- 115 VAC, 400/60 Hz
- 30 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

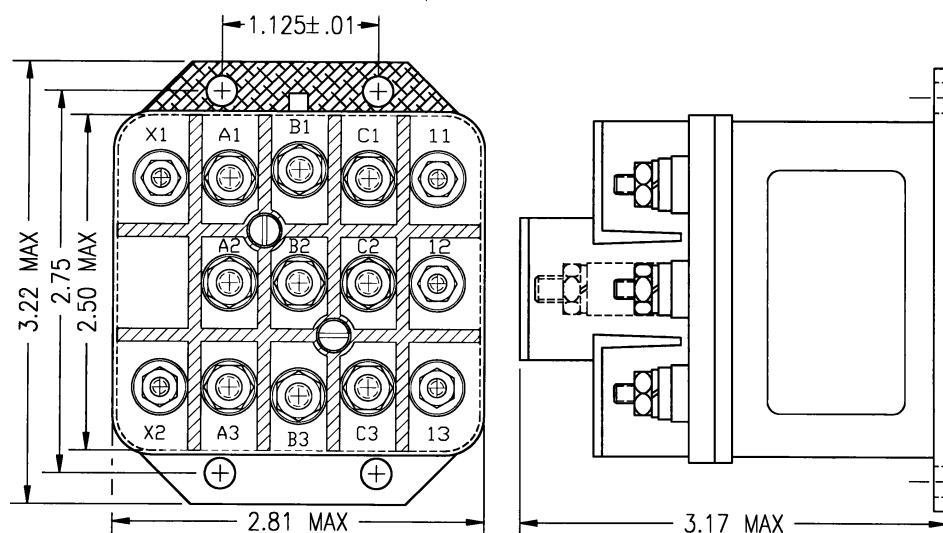

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

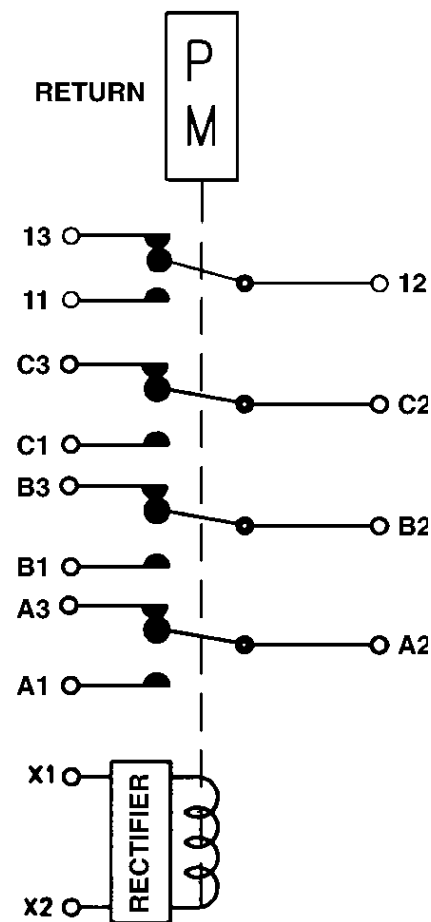CONTACTOR CONFIGURATION

Notes:

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed
Main Contacts:	
Configuration	3PDT Side Stable
Voltage Nominal	115/200 VAC, 400 Hz 115 VAC, 60 Hz
Current Resistive	30 Amps
Inductive	30 Amps
Motor	30 Amps
Auxiliary Contacts:	
Configuration	SPDT
Voltage Nominal	28 VDC or 115 VAC, 400/60 Hz
Current Resistive	5 Amps
Coil Data:	
Duty Cycle	Continuous
Nominal Coil Voltage	115 VAC, 400/60 Hz
Pick-Up Voltage Maximum	90 VAC, 400/60 Hz
Coil Current Maximum	0.090 Amps at 25°C, 115 VAC
Environmental Data:	
Operating Temperature	-55°C to +71°C
Altitude Maximum	50,000 Feet
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight Maximum	1 Lb. 2 Oz.