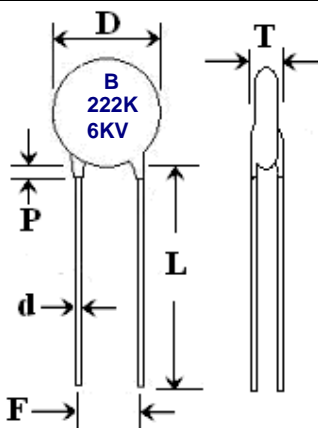


**SPECIFICATION FOR APPROVAL**

<b>High Voltage Ceramic Disc Capacitors</b>		Issue No.				
CUSTOMER :		Issue Day. <b>24/09/2019</b>				
Capacitance: <b>2,200 pF</b>	Tolerance: <b>±10 %</b>	W V <b>6,000 VDC</b>				
Temp. Coef. <b>Y5P</b>	Q'ty of Sample :            pcs	<b>Your Confirmation</b>				
Cust. P/N:	Part No. <b>KB3I222K-L016BD18</b>	<b>APPROVAL</b>				
Shape & Dimension	Unit : mm					
 <p><b>D: <u>18.0 max.</u></b> <b>T: <u>6.0 max.</u></b> <b>F: <u>9.5 ±0.8</u></b> <b>L: <u>25.0 min.</u></b> <b>d: <u>0.6 ±0.05</u></b> <b>P: <u>3.0 max.</u></b></p>		<b>CONDITIONAL APPROVAL</b>				
		<b>REJECTION</b>				
		<b>(Please send a copy for our ref.)</b>				
<b>SPECIFICATION</b>		Initial Test				
		No.	pF	Tanδ	I.R.	T.V.
Frequency = <b>1K Hz</b> Temperature = <b>25 °C</b>		1.				
1	Tan δ : <b>2.5 %</b> Max.	2.				
2	Initial IR : <b>10,000</b> MΩ Min.	3.				
3	Dielectric Strength Test :    DC <b>9,000 V</b>	4.				
4	Case Insulation Test :    DC <b>6,000 V</b>	5.				
5	Temperature Characteristics: ΔC/C = <b>±10% at -25°C to +85°C</b>	6.				
6	Operating Temperature : <b>-25°C to +85°C</b>	7.				
7	Lead Pull Test : <b>1.0</b> Kg 5 Seconds.	8.				
8	Coating : Epoxy resin coated	9.				
		10.				
Spec. Applied by EIA RS198						
Test Instruments:						
(1). Capacitance:						
(a).CHEN HWA 1062 L.C.R.METER (1Khz).						
(b).ESI410 OR HP 4277 L.C.R.METER (1Mhz).						
(2). Dissipation Factor: as the Item (1).						
(3). Insulation Resistance: GENERAL RADIO 1864 MEGOHM METER.						
(4).Dielectric Strength: PHIHON PUNCTURE TESTER.						
Inspected by		Checked by	吳美華	Approved by	許介洲	