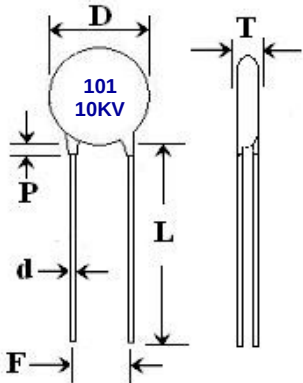


SPECIFICATION FOR APPROVAL

CERAMIC DISC CAPACITORS		Issue No.				
CUSTOMER:		Issue Day. 04/10/2019				
Capacitance: 100 pF	Tolerance: ±10%	W V 10,000 VDC				
Temp. Coef. Y5P	Q'ty of Sample: pcs	Your Confirmation				
Cust. P/N:	Part No. KB4A101K-L018BD8	APPROVAL CONDITIONAL APPROVAL REJECTION (Please send a copy for our ref.)				
Shape & Dimension Unit: mm						
 D: 8.0 max. T: 8.0 max. F: 9.5 ±1.0 L: 25.0 min. P: 3.0 max. d: 0.8 ±0.1						
SPECIFICATION		Initial Test				
		No.	pF	Tanδ	I.R.	T.V.
Frequency = 1K Hz Temperature = 25 °C		1.				
1	Tan δ : 2.5 % Max.	2.				
2	Initial IR : 10,000 MΩ Min.	3.				
3	Dielectric Strength Test : DC 15,000 V	4.				
4	Case Insulation Test : DC 10,000 V	5.				
5	Temperature Characteristics : ΔC/C = ±10% at -30°C ~ +85°C	6.				
6	Operating Temperature Range: -25°C ~ +85°C	7.				
7	Lead Pull Test : 1.0 Kg 5 Seconds.	8.				
8	Epoxy Resin coated	9.				
Remark:		10.				
Spec. Applied by EIA RS198 Test Instruments: (1). Capacitance: (a).CHEN HWA 1062 L.C.R.METER (1Khz). (b).ESI410 OR HP 4277 L.C.R.METER (1Mhz). (2). Dissipation Factor: as the Item (1). (3). Insulation Resistance: GENERAL RADIO 1864 MEGOHM METER. (4).Dielectric Strength: PHIHON PUNCTURE TESTER.						
Inspected by		Checked by	吳美華	Approved by	許介洲	