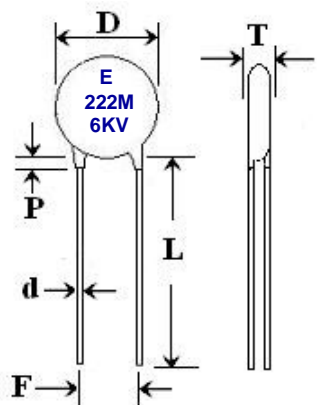


**SPECIFICATION FOR APPROVAL**

<b>CERAMIC DISC CAPACITORS</b>		Issue No.				
CUSTOMER:		Issue Day. <b>07/10/2019</b>				
Capacitance: <b>2,200 pF</b>	Tolerance: <b>±20%</b>	W V <b>6,300</b> VDC				
Temp. Coef. <b>Y5U</b>	Q'ty of Sample:            pcs	<b>Your Confirmation</b>				
Cust. P/N:	Part No. <b>KE3I222M-L016BD15</b>	<b>APPROVAL</b>  <b>CONDITIONAL APPROVAL</b>  <b>REJECTION</b>  (Please send a copy for our ref.)				
Shape & Dimension	Unit: mm					
 <p> <b>D: 15.0 max.</b>  <b>T: 7.0 max.</b>  <b>F: 10.0 ±0.8</b>  <b>L: 25.0 min.</b>  <b>P: 4.0 max.</b>  <b>d: 0.6 ±0.1</b> </p>						
<b>SPECIFICATION</b>		Initial Test				
Frequency = <b>1K Hz</b> Temperature = <b>25°C</b>		No.	pF	Tanδ	I.R.	T.V.
1	Tan δ : <b>2.5 %</b> Max	1.				
2	Initial IR : <b>10,000 MΩ</b> Min.	2.				
3	Dielectric Strength Test : DC <b>9,450 V</b>	3.				
4	Case Insulation Test : DC <b>6,000 V</b>	4.				
5	Temperature Characteristics: ΔC/C = <b>+22%,-56% at -25°C~ +85°C</b>	5.				
6	Operating Temperature Range: <b>-25°C~ +85°C</b>	6.				
7	Lead Pull Test : <b>1.0</b> Kg 5 Seconds.	7.				
8	Epoxy Resin coated	8.				
		9.				
		10.				
Spec. Applied by EIA RS198 Test Instruments: (1). Capacitance: (a).CHEN HWA 1062 L.C.R.METER (1Khz). (b).ESI410 OR HP 4277 L.C.R.METER (1Mhz). (2). Dissipation Factor: as the Item (1). (3). Insulation Resistance: GENERAL RADIO 1864 MEGOHM METER. (4).Dielectric Strength: PHIHON PUNCTURE TESTER.						
Inspected by		Checked by	吳美華	Approved by	許介洲	