
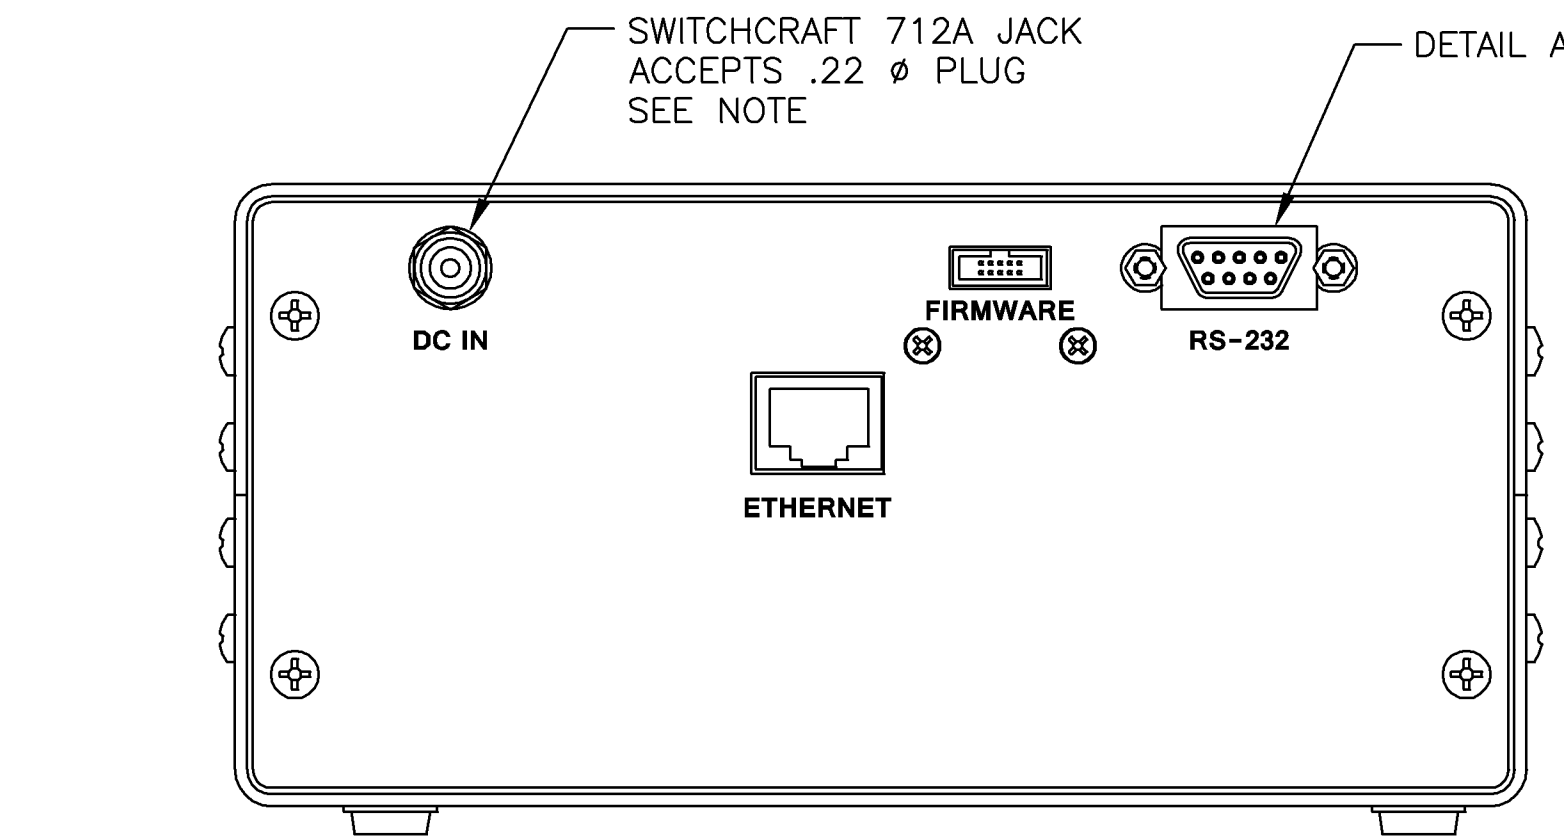



MOMENTARY SWITCH FOR MANUAL CONTROL
2-PLACES
TAP TO STEP
HOLD TO JOG

CURRENT ATTENUATION DISPLAYED
2-PLACES

SMA FEMALE
3-PLACES

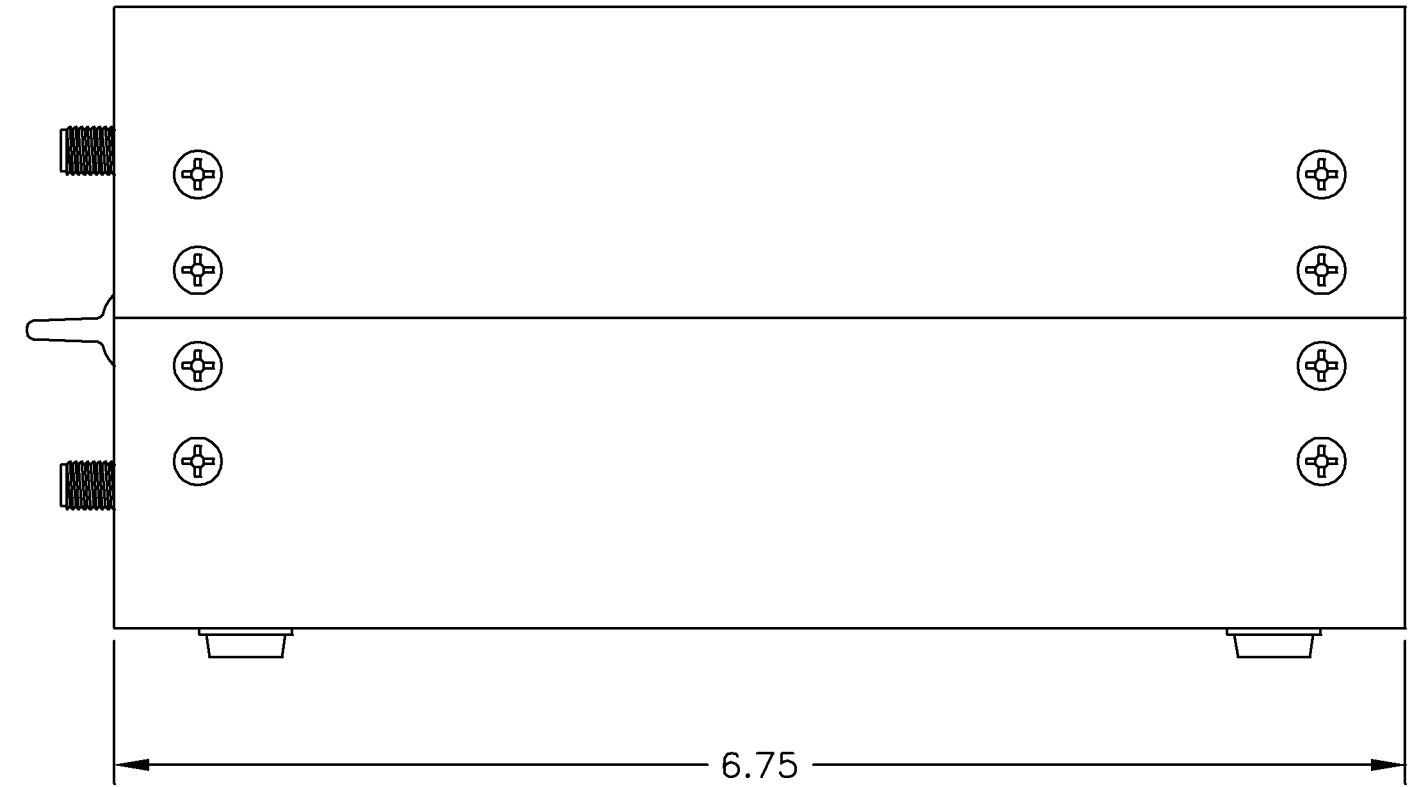

REAR VIEW

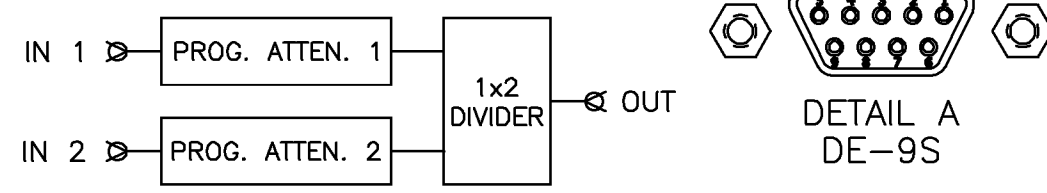

PIN	FUNCTION
1	CHASSIS GROUND
2	RECEIVED DATA
3	TRANSMITTED DATA
4	NO CONNECTION
5	SIGNAL GROUND
6	NO CONNECTION
7	RTS
8	CTS
9	NO CONNECTION

NOTE:
THIS UNIT IS SUPPLIED WITH A 12 VOLT TRANSFORMER (100-240VAC)

REV	ECN	DATE	BY	APPR	MATERIAL		PROPRIETARY INFORMATION
-	ISSUED	11-4-11	BZ	TEZ	ALUMINUM ALLOY		ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES
A	24240	12-1-14	DTS	TRS	FINISH CASE: BLACK PAINT / FRONT & REAR: GRAY PAINT		
B	24846	6-5-15	JZ	TRS	MODEL 50BA-XXX-XX		TOLERANCES
C	28303	12-5-17	JZ	TEZ	DESCRIPTION		.XX±.010 .XXX±.005 .XX±.5
					MINI BENCHTOP ATTENUATOR		DWG #
							092-7141

jfw **JFW INDUSTRIES, INC.**
www.jfwindustries.com PH: 317-887-1340