




6-32 x .200 DP.
4-PLACES ON A
.750Ø B.C



RECOMMENDED MOUNTING PATTERN

* ADD: C'SINK .265 Ø x .82"
FOR FLATHEAD SCREWS

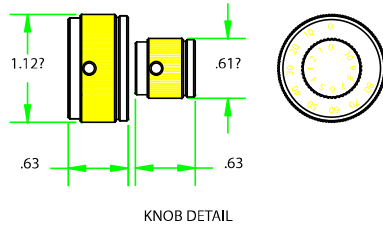

 JFW INDUSTRIES, INC. INDIANAPOLIS, IN						PROPRIETARY INFORMATION
REV	ECN	DATE	BY	DRAWN BY	DATE	ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES
A	6594	1-24-01	CDJ	APPROBY	12-10-96	
B	6655	3-12-01	CDJ	SCALE	FULL	TOLERANCES
C	6750	6-11-01	CDJ	MATERIAL	ALUMINUM ALLOY	FRACTIONAL DIM. ± .004
D	7356	2-1-03	BZ	FINISH	CHEMFILM TCP	2 PLACE DECIMAL ± .010
E	12635	6-20-06	ETW	DESCRIPTION	50DR-077	3 PLACE DECIMAL ± .005
					0-90dB ROTARY ATTEN.	ANGULAR DIM. ± 1/2°
						DWG. NO. 092-2520