

**SPECIFICATION SHEET**

**JFW MODEL 50FH-XXX-300-2**

**FIXED ATTENUATOR**

JFW Industries, Inc.  
Phone: 317-887-1340  
sales@jfwindustries.com  
www.jfwindustries.com

Frequency Range DC-2000 MHz

Impedance 50 Ohms nominal

Attenuation Values 3 through 40 dB in any 1 dB increment

VSWR 1.4:1 maximum

Attenuation Accuracy  $\pm 0.5$  dB or 3%


RF Input Power 300 Watts average @ +25°C  
Derate to 75 Watts @ +85°C

Peak Power 2000 Watts

RF Connector TNC, N or 7/16

Operating Temperature Range -55°C to +100°C

Physical Size See outline drawing 092-790

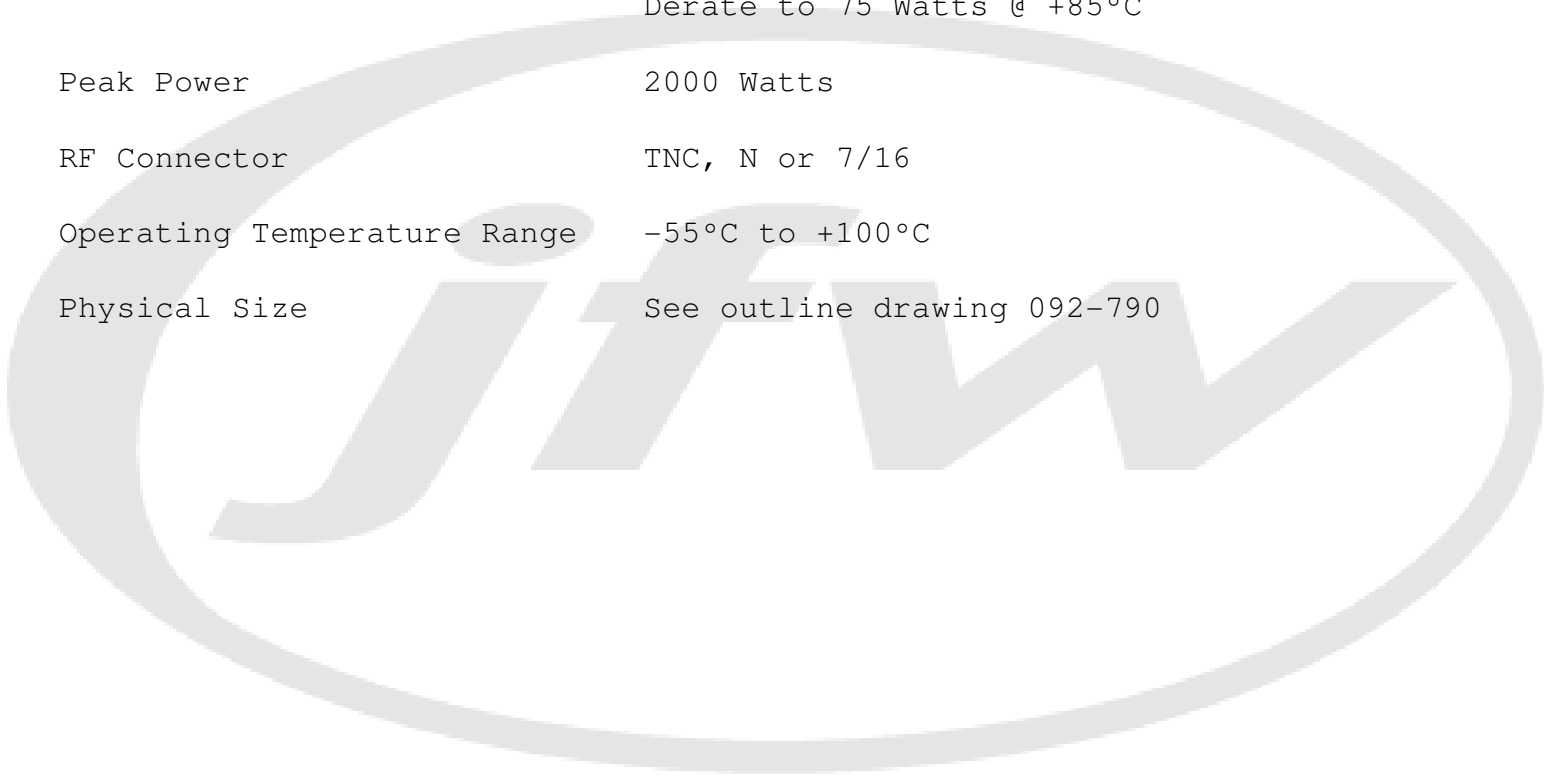

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
134	05/06/1993	A		786	07/30/1997	D	
681	02/28/1997	B		905	11/25/1997	E	
704	03/24/1997	C		9999	07/25/2003	F	SL 12/11/2003