
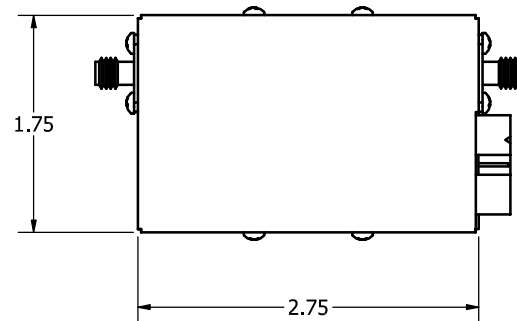
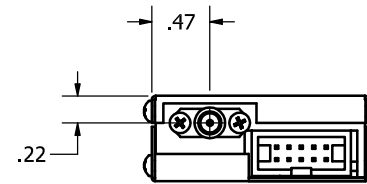
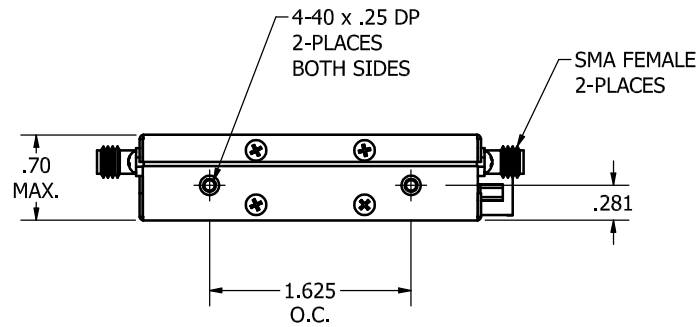


DETAIL A
T&B #609-1057

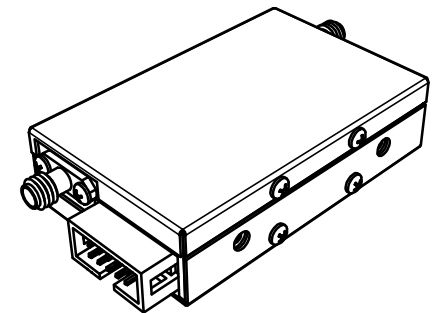

PIN	50P-1767 FUNCTION	50P-1768/1963 FUNCTION	50P-1769 FUNCTION
1	10dB TTL CONTROL	5dB TTL CONTROL	.1dB TTL CONTROL
2	20dB TTL CONTROL	10dB TTL CONTROL	.2dB TTL CONTROL
3	40dB TTL CONTROL	20dB TTL CONTROL	.4dB TTL CONTROL
4	NO CONNECTION	20dB TTL CONTROL	.8dB TTL CONTROL
5	NO CONNECTION	NO CONNECTION	NO CONNECTION
6	NO CONNECTION	NO CONNECTION	NO CONNECTION
7	NO CONNECTION	NO CONNECTION	NO CONNECTION
8	NO CONNECTION	NO CONNECTION	NO CONNECTION
9	+XX Vdc	+XX Vdc	+XX Vdc
10	GROUND	GROUND	GROUND

REV	ECN	DATE	BY	APPR	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340	
-	ISSUED	5-07-07	TRS	TEZ		
A	24444	9-17-15	JZ	TEZ	MATERIAL BRASS FINISH NICKEL MODEL 50P-XXXX SCALE FULL DESCRIPTION PROGRAMMABLE ATTENUATOR	
B	25851	10-29-15	JZ	TEZ		
					TOLERANCES .XX±.010 .XXX±.005 XX*±.5" DWG #	
					092-5411	