

SPECIFICATION SHEET

JFW MODEL 50PA-701

LC HANDOVER TEST SYSTEM

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	2-6 GHz
Configuration	4 X 1 LC Handover Test System (See block diagram 092-5370)
Enclosure Type	19 inch rack mount @ 2RU high
Impedance	50 Ohms nominal
Attenuation Range	0-95 dB in 1 dB steps
Startup/Default States (configurable)	Maximum attenuation (see ATTEN STARTUP command) DHCP enabled (see NET command) 4 Ethernet users (see NET USERS command) Prompts off (see PROMPT command)
VSWR	1.6:1 maximum
Attenuation Accuracy	± 0.50 dB 1-7 dB ± 1.00 dB 8-11 dB ± 1.25 dB or 4% 12-95 dB (whichever is greater) (guaranteed monotonic)
Insertion Loss	22.5 dB maximum 21.5 dB typical
Power Divider Isolation	20 dB minimum 25 dB typical
RF Input Power	+27 dBm average +33 dBm (no damage)
Switching Speed	4 microseconds typical (after command is received & processed) (3 milliseconds typical processing time)
AC Supply	100-240 VAC @ 47-63 Hz 2 Amp 5x20mm "Slo-Blo" AC fuse Littelfuse#215-002, JFW#025-021
Manual Control	20-Button Keypad and LCD display (IP Address configurable via keypad) (Net mask configurable via keypad) (Gateway configurable via keypad) (Baud rate configurable via keypad)

--CONTINUED--

SPECIFICATION SHEET

JFW MODEL 50PA-701

LC HANDOVER TEST SYSTEM

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Remote Control Ethernet (DHCP, TCP/IP, 10/100, up to 12 users)
RS-232 (up to 115200 Baud)


Remote Commands Attenuator Control Commands:
Atten, Set Attenuator, Read Attenuator, Set
All Attenuators, Read All Attenuators, Read
All Extended, Fade Attenuator, Variable
Attenuator Handover, Block, Set Block, Read
Block, Read All Blocks, Fade Block, Variable
Block Handover

System Commands:
Help, Identification, Store, Recall, Pause,
Net, Serial, Close, Disconnect, MOTD, Date,
Message, Restrict, IDENT, Name, Show Users,
Reboot, Uptime, Prompt

RF Connector N or SMA female

Operating Temperature Range 0°C to +50°C

Physical Size See outline drawing 092-6603

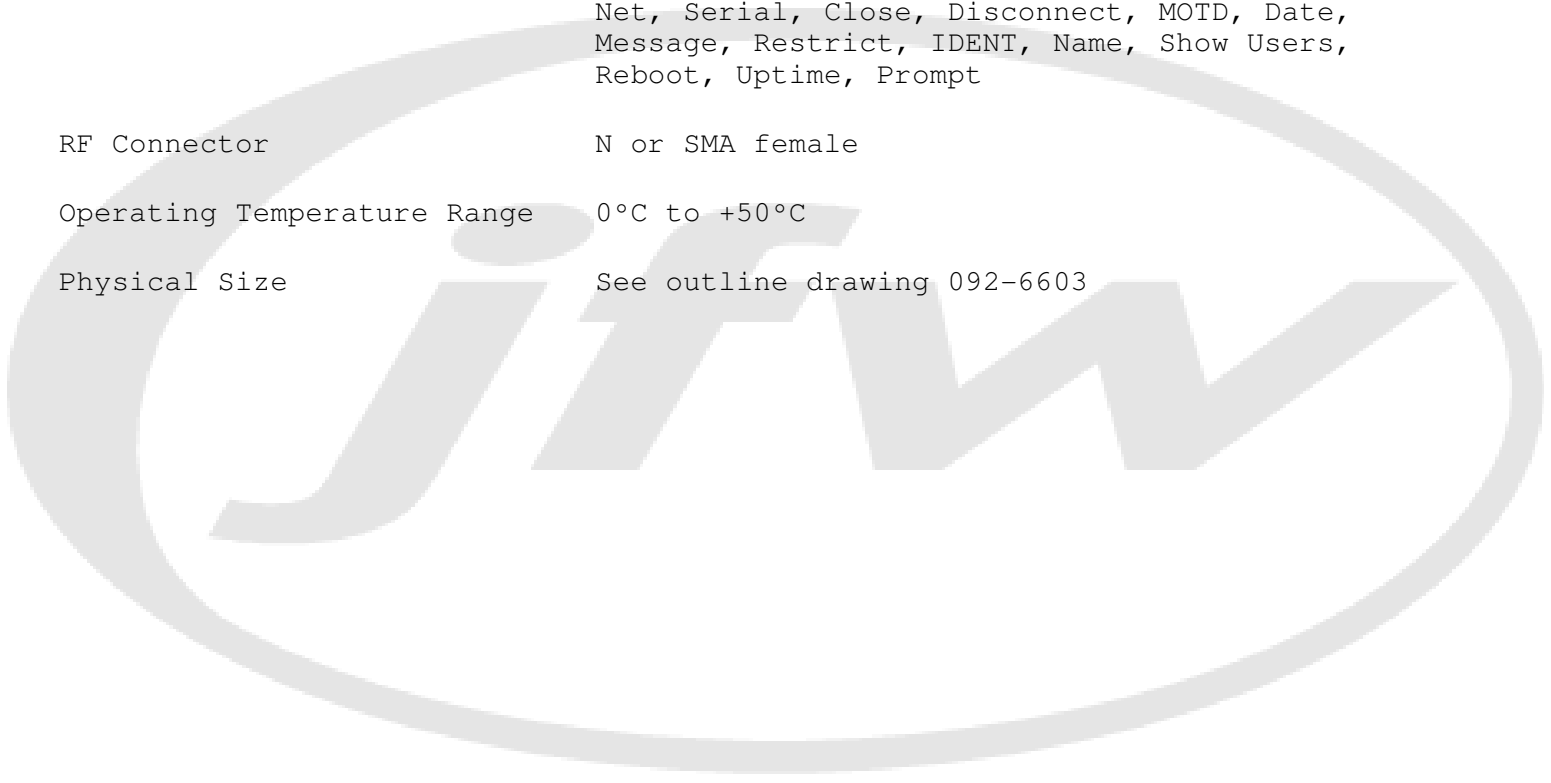

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	02/14/2012		TRS 02/14/2012				
24239	07/03/2014	A	TRS 07/03/2014				
28159	10/06/2017	B	CLK 10/06/2017				