

SPECIFICATION SHEET

JFW MODEL 50SA-474

SWITCH ASSEMBLY

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	DC-18 GHz
Configuration	1P3T normally open reflective electro-mechanical RF switch
Enclosure Type	Benchtop
Startup/Default States (configurable)	RF Switch off at startup (see SWITCH command) DHCP enabled (see NET command) 4 Ethernet users (see NET command) Prompts off (see PROMPT command) All of these default settings can be changed by user. Unit can be configured for up to 12 Ethernet users.
Impedance	50 Ohms nominal
VSWR	1.2:1 maximum DC-4 GHz 1.3:1 maximum 4-8 GHz 1.4:1 maximum 8-12.4 GHz 1.5:1 maximum 12.4-18 GHz
Insertion Loss	0.2 dB maximum DC-4 GHz 0.3 dB maximum 4-8 GHz 0.4 dB maximum 8-12.4 GHz 0.5 dB maximum 12.4-18 GHz
Isolation	70 dB minimum DC-4 GHz 65 dB minimum 4-8 GHz 60 dB minimum 8-12.4 GHz 60 dB minimum 12.4-18 GHz
RF Input Power (cold switched)	100 Watts average DC-4 GHz 90 Watts average 4-8 GHz 70 Watts average 8-12.4 GHz 60 Watts average 12.4-18 GHz
Switching Speed	20 milliseconds (after command is received and processed) (3 milliseconds typical processing time)
Manual Control	20-Button Keypad and LCD display (IP Address configurable via keypad) (Net mask configurable via keypad) (Gateway configurable via keypad) (Baud rate configurable via keypad)
Remote Control	Ethernet (DHCP, TCP/IP, 10/100, up to 12 users) RS-232 (up to 115200 Baud)

--CONTINUED--

SPECIFICATION SHEET

JFW MODEL 50SA-474

SWITCH ASSEMBLY

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Remote Commands

RF Switch Control Commands:
Switch, Set Switch, Read Switch

System Commands:
Help, Identification, Store, Recall, Pause, Net,
Serial, Close, Disconnect, MOTD, Date, Message,
Restrict, IDENT, Name, Show Users, Reboot, Uptime,
Prompt

RF Connector

SMA female

Control Connector

RJ-45 (Ethernet)
DE-9S (RS-232)

AC Supply


100-240 VAC @ 47-63 Hz
2 Amp 5x20mm "Slo-Blo" AC fuse
Littelfuse #215-002, JFW #025-021

Operating Temperature Range

0°C to +50°C

Physical Size

See outline drawing 092-8104

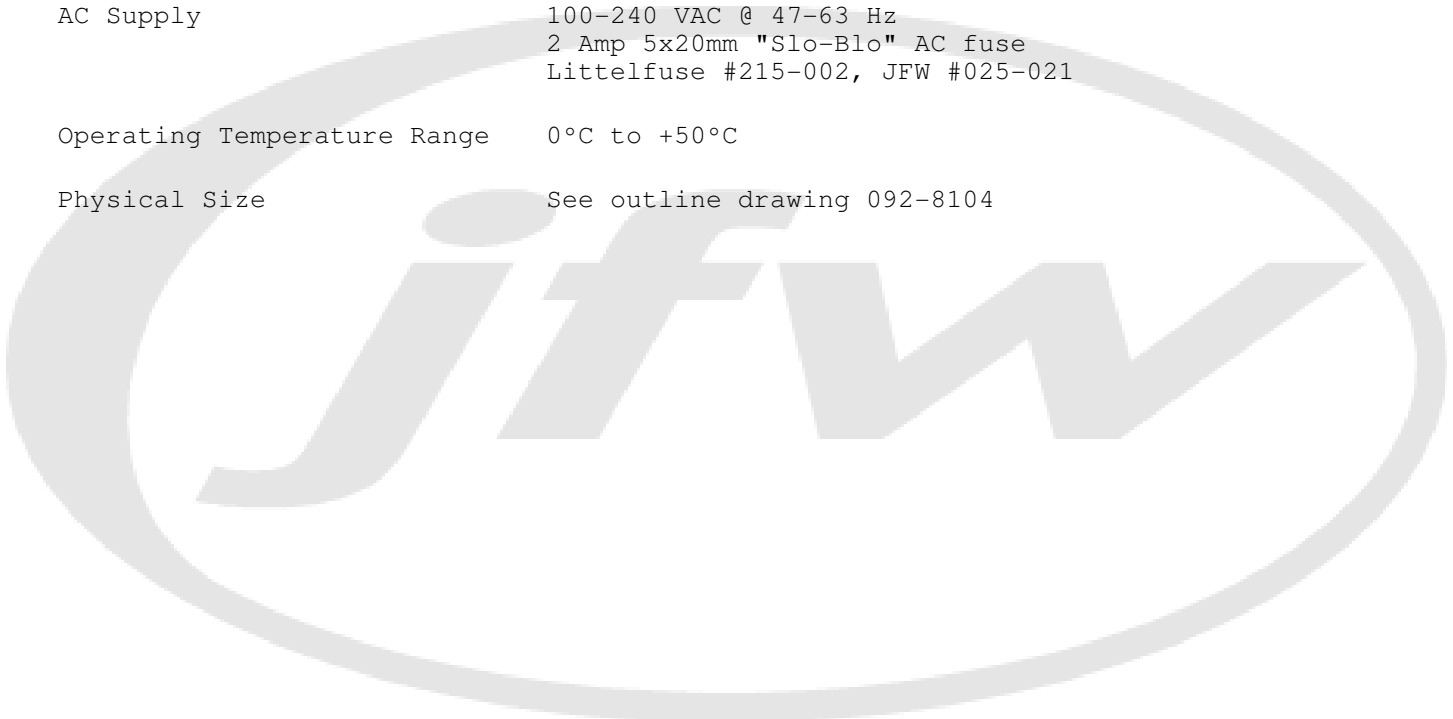

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	09/29/2014		CLK 09/29/2014				
24239	07/16/2015	A	TRS 07/16/2015				