

SPECIFICATION SHEET

JFW MODEL 50T-608

TERMINATION

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-6 GHz

Impedance 50 Ohms nominal

VSWR 1.1:1 maximum DC-2 GHz
1.2:1 maximum 2-6 GHz


1.02:1 typical @ 1 GHz
1.05:1 typical @ 3 GHz
1.11:1 typical @ 6 GHz

RF Input Power 2 Watts average

RF Connector N, SMA, or TNC (male or female)

Operating Temperature Range -55°C to +100°C

Outline Drawing Numbers 092-4208 (50T-608 N M)
092-7065 (50T-608 N F)
092-4269 (50T-608 SMA M)
092-4072 (50T-608 SMA F)
092-4444 (50T-608 TNC M)
092-7064 (50T-608 TNC F)

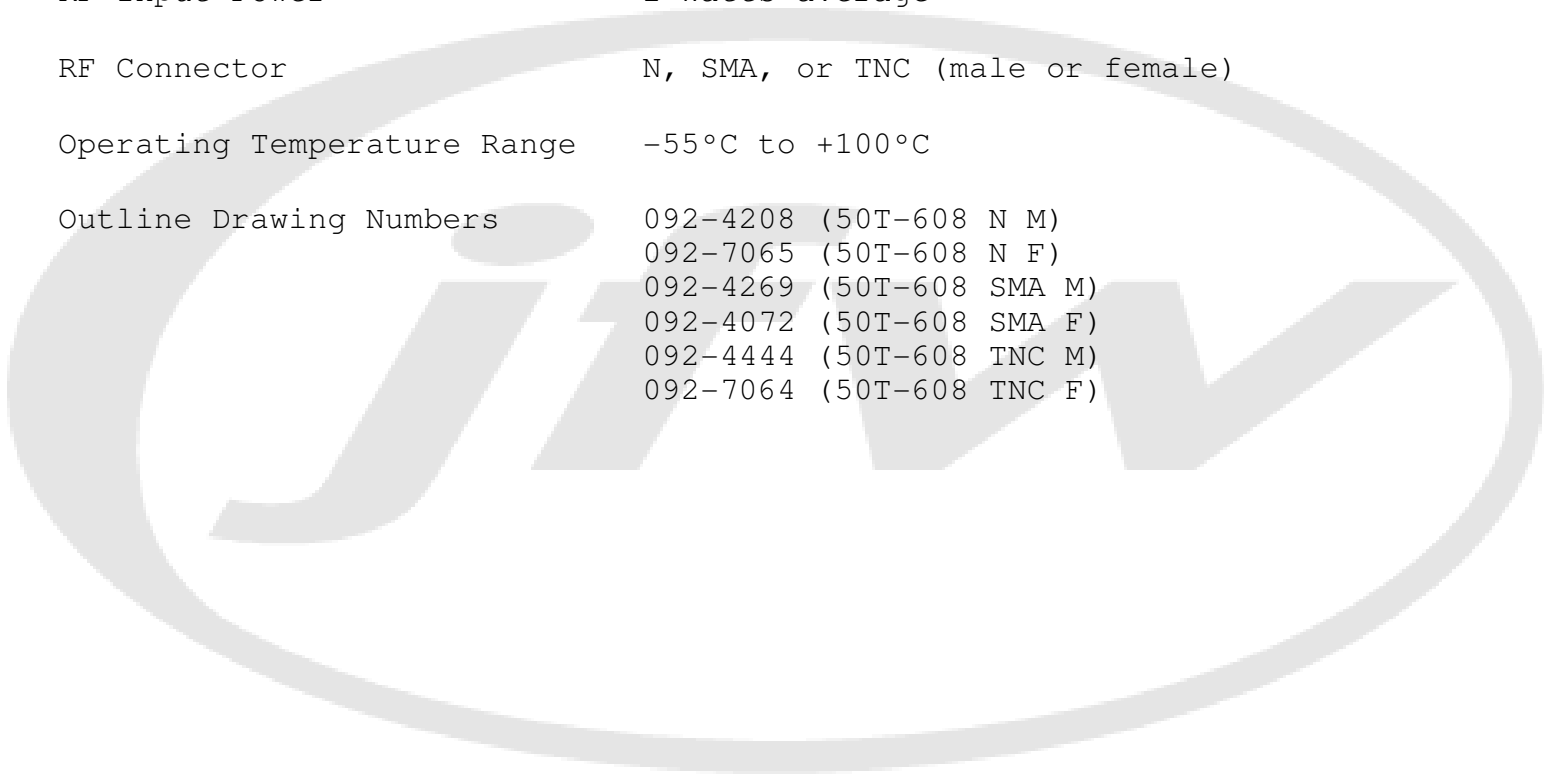

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	10/23/2017		TRS 10/23/2017				