



180 Lafayette Road  
 North Hampton, NH 03862-2448  
 PH: 603-964-3165  
 FX: 603-964-3168  
 WWW.PDEELECTRONICS.COM

## High Voltage Silicon Rectifier

Fast Recovery, Miniature  
 HA10-100, HVX10-100

**FEATURES:**





- PIV: 1kV to 10kV
- 250 nS Reverse Recovery
- High Surge Current Ratings
- Low Reverse Leakage
- Corona Free

The HVX/HA silicon rectifier series combine a medium rectified current capability in a miniature package for commercial, industrial and military applications.

ELECTRICAL SPECIFICATIONS at 25°C unless otherwise noted							MAXIMUM RATINGS					
Part Number *		Peak Inverse Voltage	Maximum Reverse Current		Max Forward Voltage @ 100mA	Reverse Recovery Time **	Maximum Average Rectified Current			Maximum Recurrent Peak Current	One Cycle Surge Current	
		PIV	$I_R @ V_{RWM}$		VF	$T_{RR}$	$I_O$			$I_F$	$I_{FSM}$	
		V	$T_A=25^\circ C$ $\mu A$	$T_A=100^\circ C$ $\mu A$	V	nS	$T_A=50^\circ C$	$T_A=100^\circ C$	$T_A=125^\circ C$	A	A	
		mA										
HVX10	HA10	1000	1	20	5	250	250	125	62.5	2.5	14	
HVX15	HA15	1500	1	20	5	250	250	125	62.5	2.5	14	
HVX20	HA20	2000	1	20	5	250	250	125	62.5	2.5	14	
HVX25	HA25	2500	1	20	5	250	250	125	62.5	2.5	14	
HVX30	HA30	3000	1	20	5	250	250	125	62.5	2.5	14	
HVX40	HA40	4000	1	20	12	250	100	50	25	1.0	4	
HVX50	HA50	5000	1	20	12	250	100	50	25	1.0	4	
HVX75	HA75	7500	1	20	12	250	100	50	25	1.0	4	
HVX100	HA100	10000	1	20	12	250	100	50	25	1.0	4	

\*Operation and testing of devices over 10,000V/inch may require re-encapsulation or immersion in a suitable dielectric material.

\*\*  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{rec}=0.25A$ , measured on discretes prior to assembly

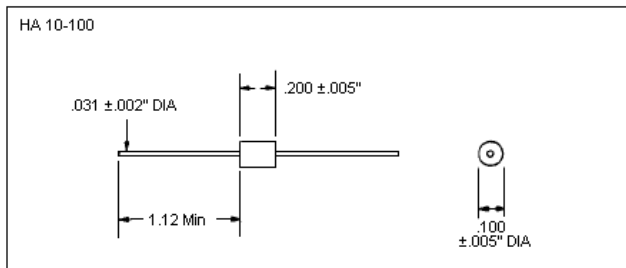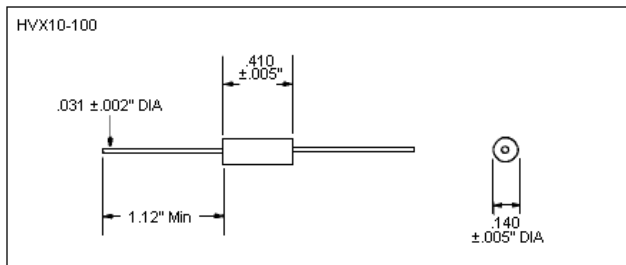

Operating and Storage Temperature.....-65°C to +150°C

Specifications subject to change without notice to ensure a better product  
**PD&E Electronics** 180 Lafayette Rd. North Hampton, NH 03862  
 Ph: (603) 964-3165 Fx: (603) 964-3168 Web: WWW.PDEELECTRONICS.COM