


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASE CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASE CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
D	07/15/04 RS	KCB	SD	LJ

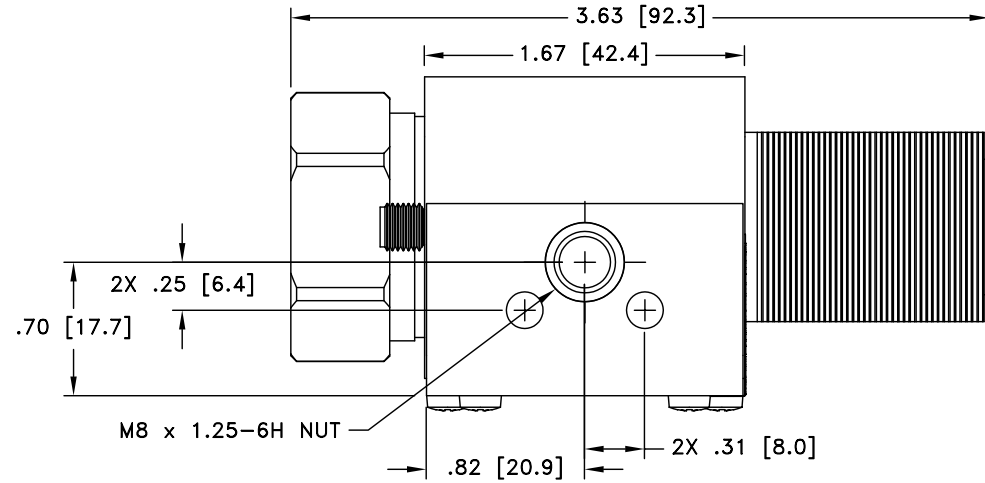

MAXIMUM CHARACTERISTICS

APPLICATION:
WEATHERIZED, FLANGE OR BULKHEAD MOUNT
FREQUENCY RANGE:
800MHz TO 2500MHz

VSWR:
≤1.1:1 OVER FREQUENCY RANGE
INSERTION LOSS:
≤0.1dB OVER FREQUENCY RANGE

POWER:
300W RMS AVERAGE

TURN ON:
+20Vdc

TURN ON TIME:
4ns FOR 2kV/ns

MAX. SURGE:
20kA IEC 61000-4-5 8/20μs WAVEFORM
THROUGHPUT ENERGY:
≤25μJ FOR 3kA, 8/20μs WAVEFORM

USER VOLTAGE:
+15Vdc MAX

USAGE CURRENT:
≤4.0A CONTINUOUS

RELATIVE HUMIDITY:
TO 95%

ENVIRONMENTAL:

LID AND CONNECTORS
MEET IEC 60529 IP67



MEET BELLCORE #TA-NWT-000487

PROCEDURE 4.11, WIND DRIVEN (120MPH)

RAIN INTRUSION TEST.

TEMPERATURE:

-50°C TO +85°C STORAGE/OPERATING

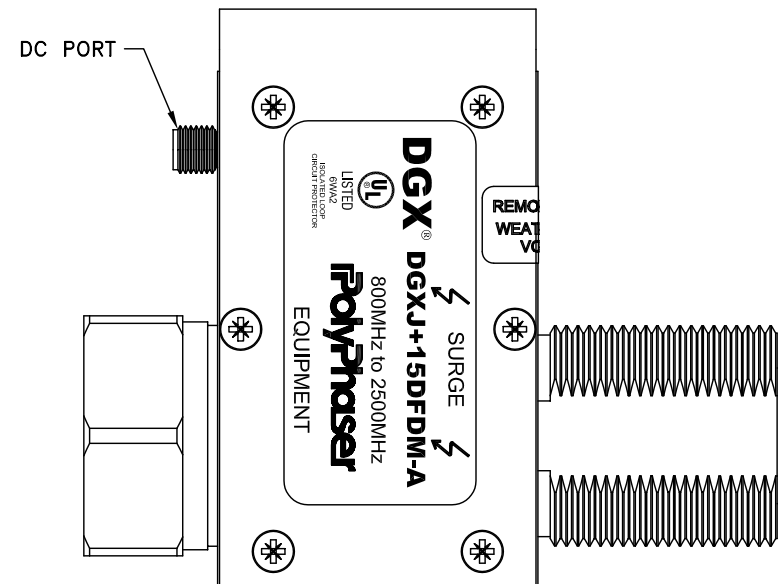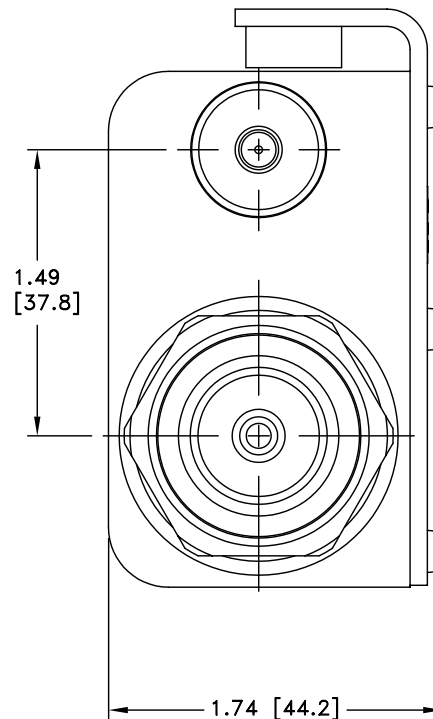

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER S. HALL	DATE 09/09/02	<div> </div> <p>P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476</p> <p>DWG NO/PART NO/DESCRIPTION</p> <p>DGXJ+15DFDM-A</p> <p>CUSTOMER PRINT</p>		
MECH ENGINEER R. DUNNING	DATE 09/20/02			
ELEC ENGINEER K. BARTEL	DATE 09/20/02			
MARKETING S. DOTTER	DATE 09/20/02			
QUALITY DEPT L. JACQUES	DATE 09/20/02	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1
		SHEET 1 OF 1		