


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.

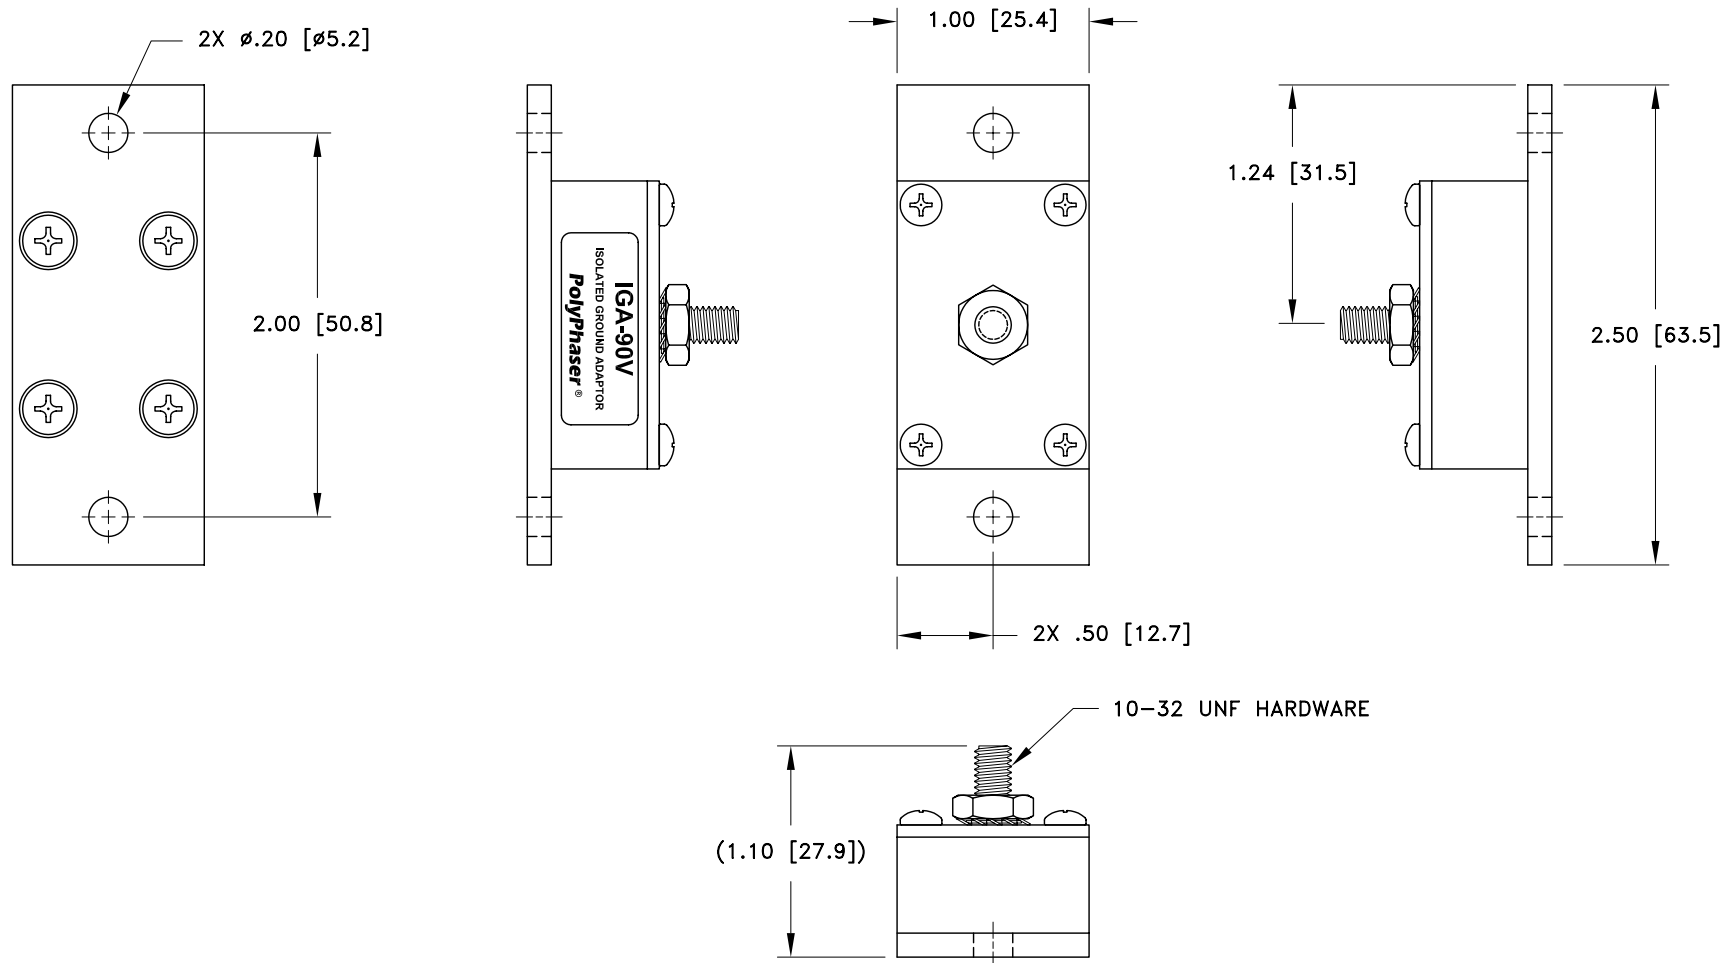

MAXIMUM CHARACTERISTICS
APPLICATION: GROUNDED FLANGE ISOLATION MOUNT
SURGE: 18kA IEC 1000-4-5 8/20 $\mu$ s WAVEFORM 110 JOULES
TURN ON: 90Vdc
TEMPERATURE: -40°C TO +85°C STORAGE/OPERATING

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_  
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. DUNNING	DATE 03/30/01	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION <b>IGA-90V</b> <b>CUSTOMER PRINT</b>	
MECH ENGINEER R. DUNNING	DATE 04/03/01		
ELEC ENGINEER J. JONES	DATE 04/03/01		
MARKETING P. HEEREN	DATE 04/03/01		
QUALITY DEPT R. MATHEUS	DATE 04/03/01		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1