


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	03/01/01	KCB	PH	RM

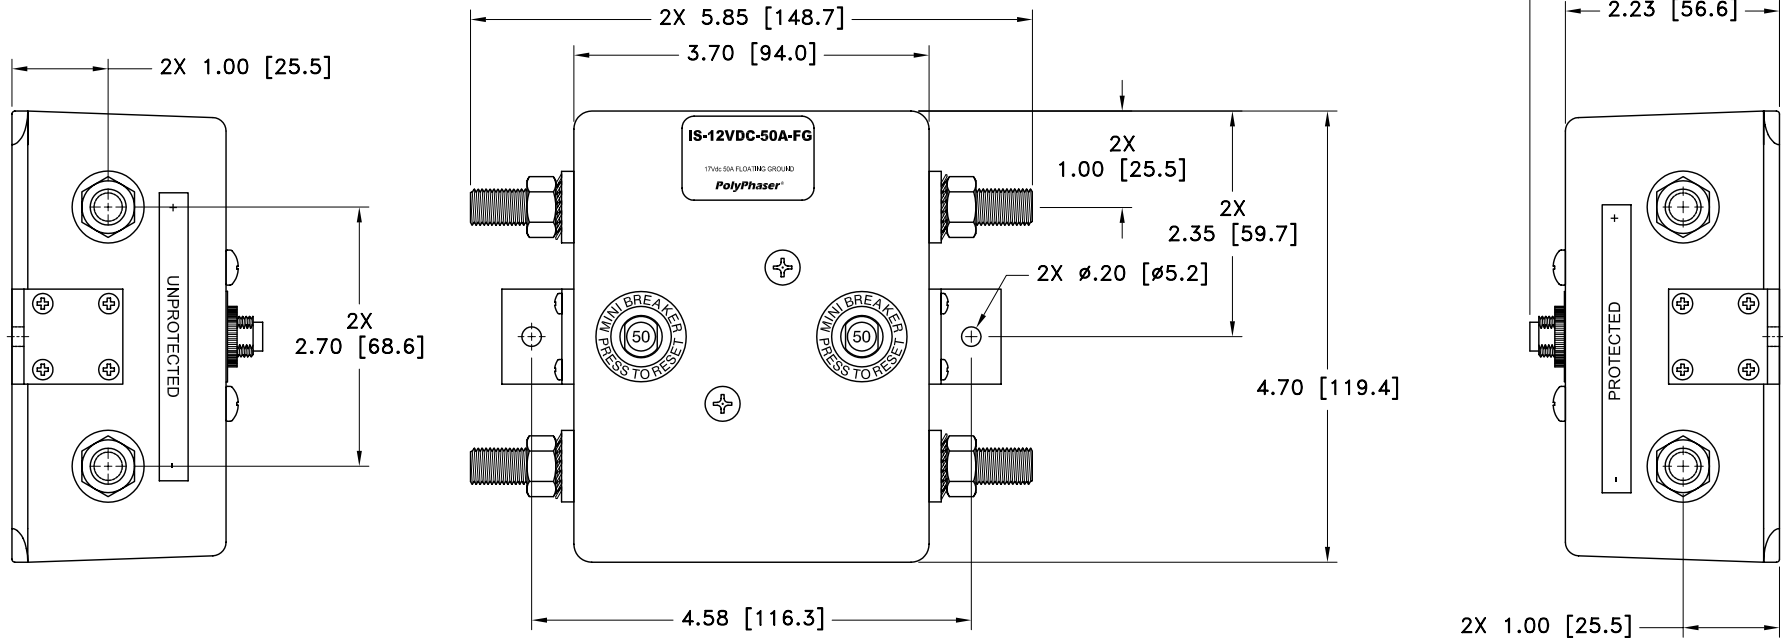

MAXIMUM CHARACTERISTICS

SURGE PER PAIR:  
18kA IEC 1000-4-5 8/20s WAVE FORM  
TURN-ON:  
17Vdc  
TURN-ON TIME:  
<2ns FOR 2kV/ns  
RESISTANCE:  
0.02Ω  
CONNECTIONS:  
3/8-24 STUDS  
USER CURRENT:  
50A MAXIMUM  
OPERATING TEMPERATURE:  
-40°C TO +65°C  
STORAGE TEMPERATURE:  
-40°C TO +65°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 10/19/99	<p align="center"><b>PolyPhaser®</b></p> <p align="center">P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476</p> <p align="center">IS-12VDC-50A-FG</p> <p align="center">CUSTOMER PRINT</p>		
MECH ENGINEER M. MATTSON	DATE 12/02/99			
ELEC ENGINEER K. BARTEL	DATE 12/14/99			
MARKETING P. HEEREN	DATE 12/15/99			
QUALITY DEPT R. MATHEUS	DATE 12/15/99			
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1	