


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	10/19/99 JC	MM	PH	RM

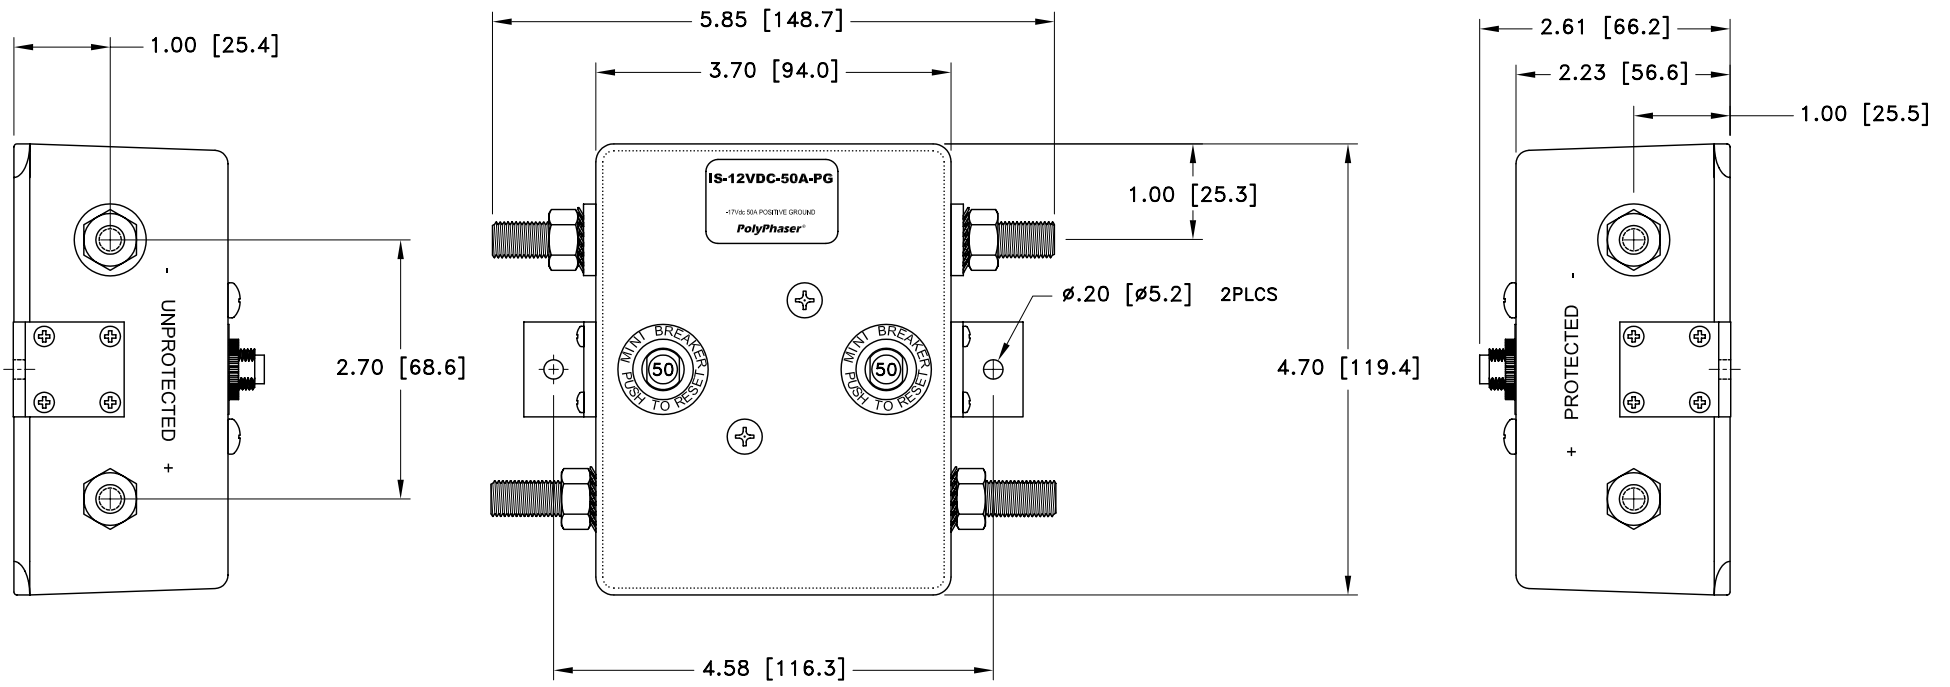

MAXIMUM CHARACTERISTICS
SURGE PER PAIR: 18ka IEC 1000-4-5 8/20 μ s WAVEFORM
TURN-ON: -17Vdc
TURN-ON TIME: <2ns FOR 2kV/ns
RESISTANCE: 0.02 Ω
CONNECTIONS: 3/8-24 STUDS
USER CURRENT: 50A MAXIMUM
TEMPERATURE: -40°C TO 65°C

CUSTOMER APPROVAL: _____ DATE: _____
ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 09/14/98	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 IS-12VDC-50A-PG CUSTOMER PRINT			
MECH ENGINEER J. VITELLO	DATE 10/23/98				
ELEC ENGINEER K. BARTEL	DATE 10/21/98				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 10/22/98	CAGE CODE 61114	FILE NAME -C1	SCALE 1=2	SHEET 1 OF 1