
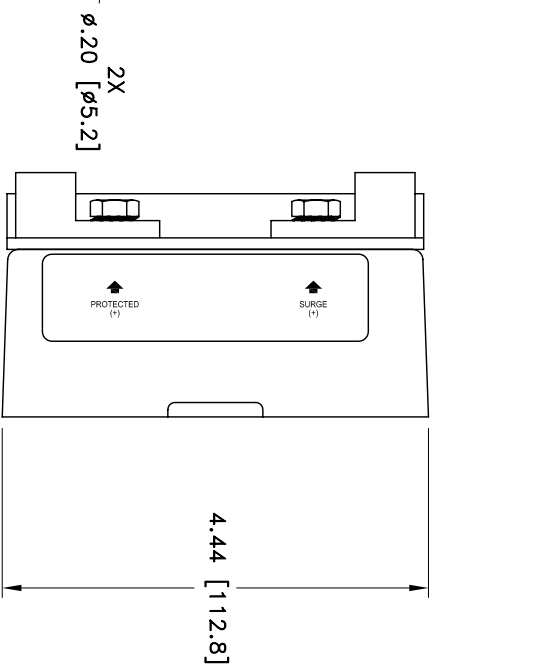
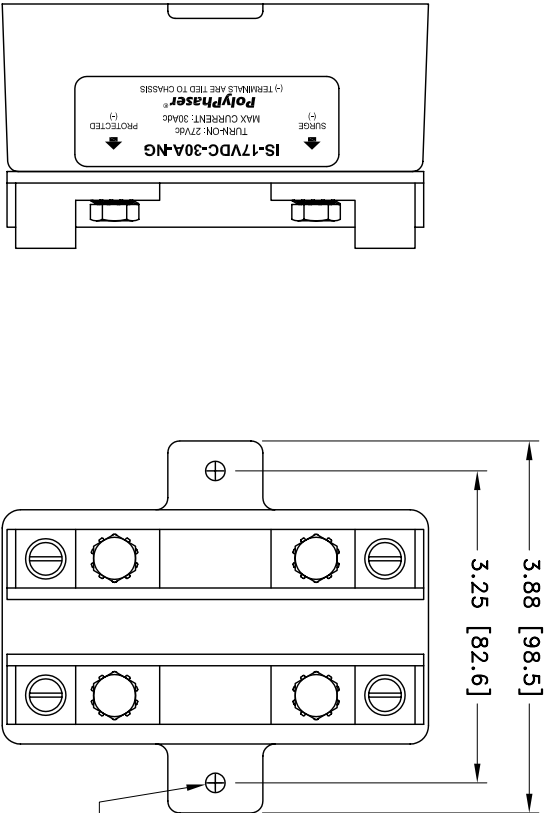


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THIS DRAWING IS THE PROPERTY OF POLYPHASER CORPORATION. THIS INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OTHERS OR APPLIED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	04/10/00	lib	KCB	PH RM
B	01/11/01	SH	KCB	PH RM

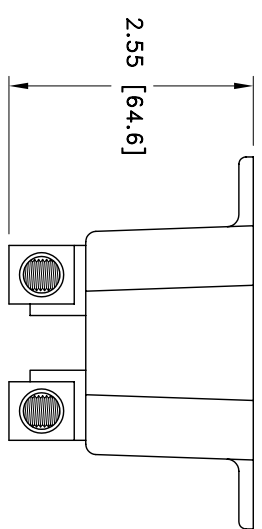

MAXIMUM CHARACTERISTICS	
SURGE:	18KA IEC 1000-4-5 8/20µs WAVEFORM
TURN ON:	27Vdc
TURN ON TIME:	<2ns
RESISTANCE:	0.02Ω
CONNECTIONS:	14 TO 1/OAWG COMPRESSION LUG @30A
TEMPERATURE:	-40°C TO +65°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____
ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER	K. MUNRO	DATE	09/25/96	PolyPhaser® P.O. BOX 9000, MINDEN, NY 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO./PART NO./DESCRIPTION IS-17VDC-30A-NG CUSTOMER PRINT
MECH ENGINEER	---	DATE	---	
ELEC ENGINEER	K. BARTEL	DATE	09/30/96	
MARKETING	---	DATE	---	
QUALITY DEPT	R. MATHEUS	DATE	09/30/96	CAGE CODE FILE NAME SCALE SHEET 61114 -C1 1/2 1 OF 1