


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	05/22/02	LC	PH	RM

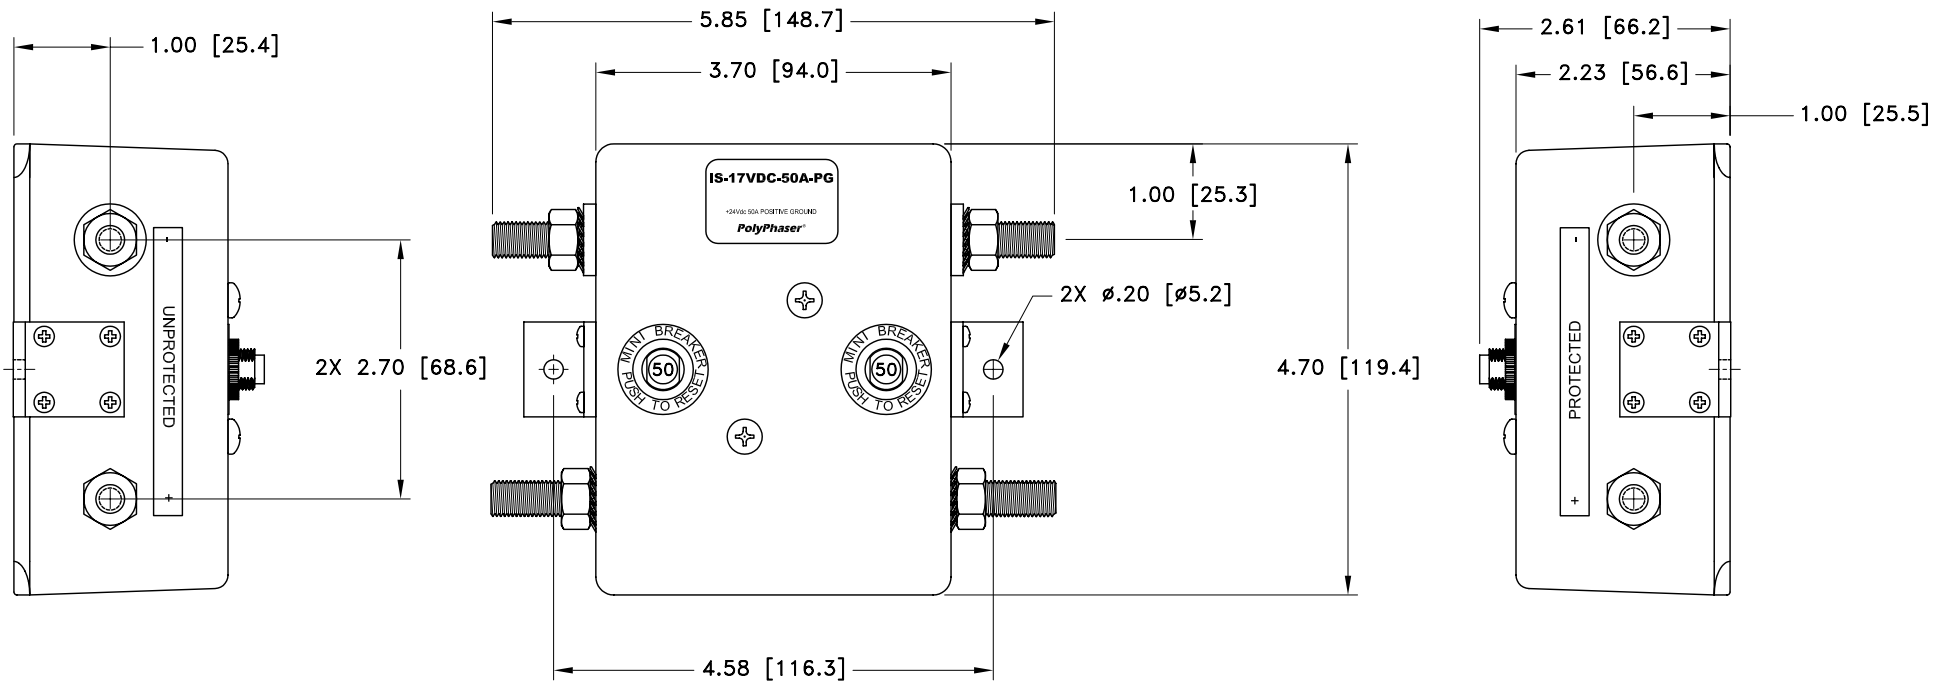

MAXIMUM CHARACTERISTICS
<b>SURGE PER PAIR:</b> 18kA IEC 1000-4-5 8/20 $\mu$ s WAVEFORM
<b>TURN-ON:</b> -24Vdc
<b>TURN-ON TIME:</b> <2ns FOR 2kV/ns
<b>RESISTANCE:</b> 0.02 $\Omega$
<b>CONNECTIONS:</b> 3/8-24 STUDS
<b>USER CURRENT:</b> 50A MAXIMUM
<b>TEMPERATURE:</b> -40°C TO 65°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 10/21/99	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION <b>IS-17VDC-50A-PG</b> CUSTOMER PRINT		
MECH ENGINEER M. MATTSON	DATE 12/02/99			
ELEC ENGINEER K. BARTEL	DATE 12/14/99			
MARKETING P. HEEREN	DATE 12/15/99			
QUALITY DEPT R. MATHEUS	DATE 12/14/99			
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1	