


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/20/99 _{JC}	MM	PH	RM
B	05/22/02 _{IB}	LC	PH	RM
C	11/27/02 _{IB}	JJ	SD	LJ

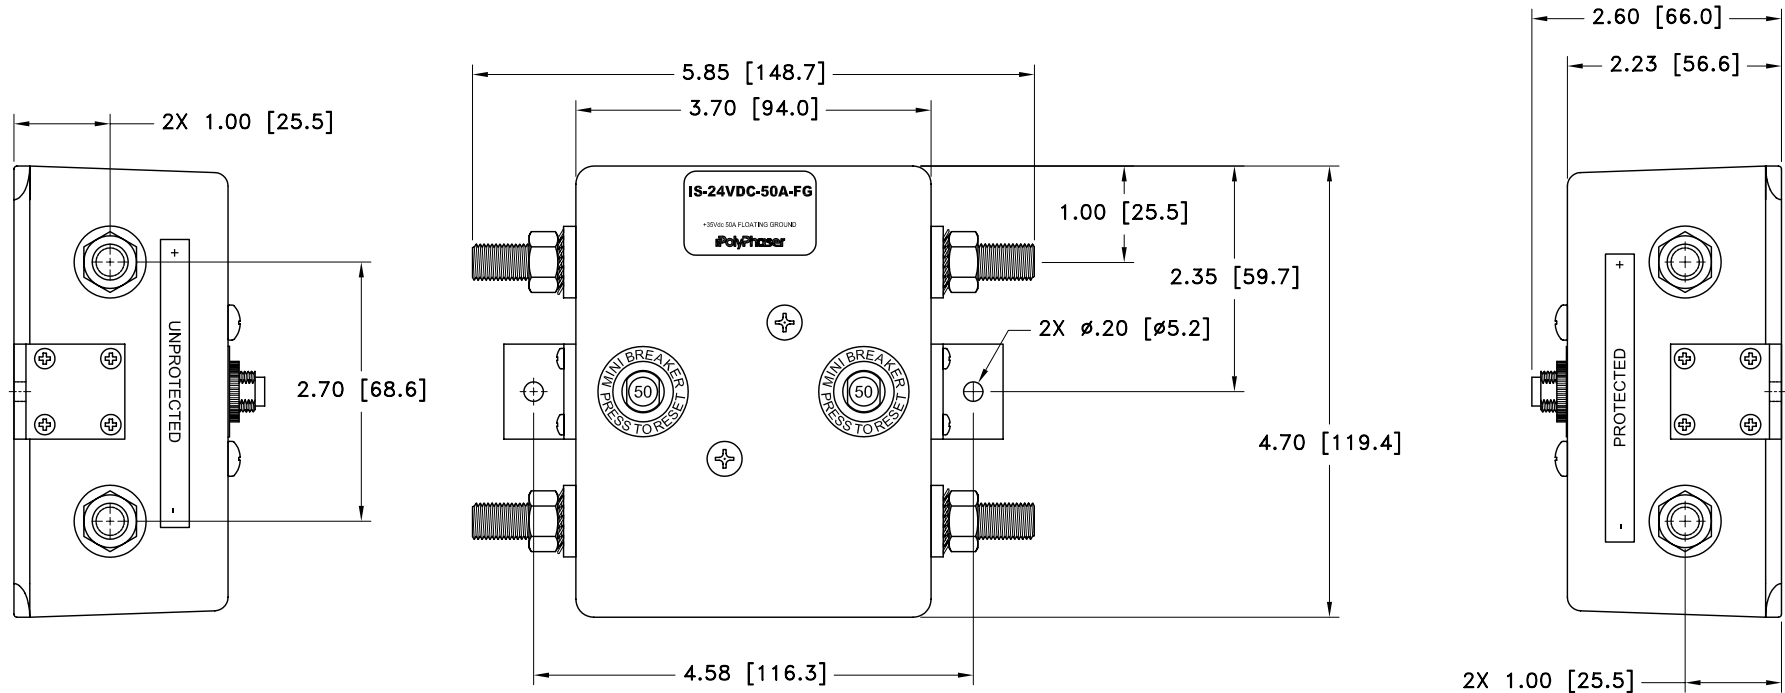

MAXIMUM CHARACTERISTICS

SURGE PER PAIR:
18kA IEC 1000-4-5 8/20 μ s WAVE FORM

TURN-ON:
35Vdc

TURN-ON TIME:
<2ns FOR 2kV/ns

RESISTANCE:
0.02 Ω

CONNECTIONS:
3/8-24 STUDS


USER CURRENT:
50A MAXIMUM

OPERATING TEMPERATURE:
+50°C

STORAGE TEMPERATURE:
-40°C TO +65°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 06/29/96	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 IS-24VDC-50A-FG CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER T. KULBIEDA	DATE 07/01/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 07/01/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1