


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/20/99 <sub>JC</sub>	MM	PH	RM
B	05/24/02 <sub>SH</sub>	LC	PH	RM

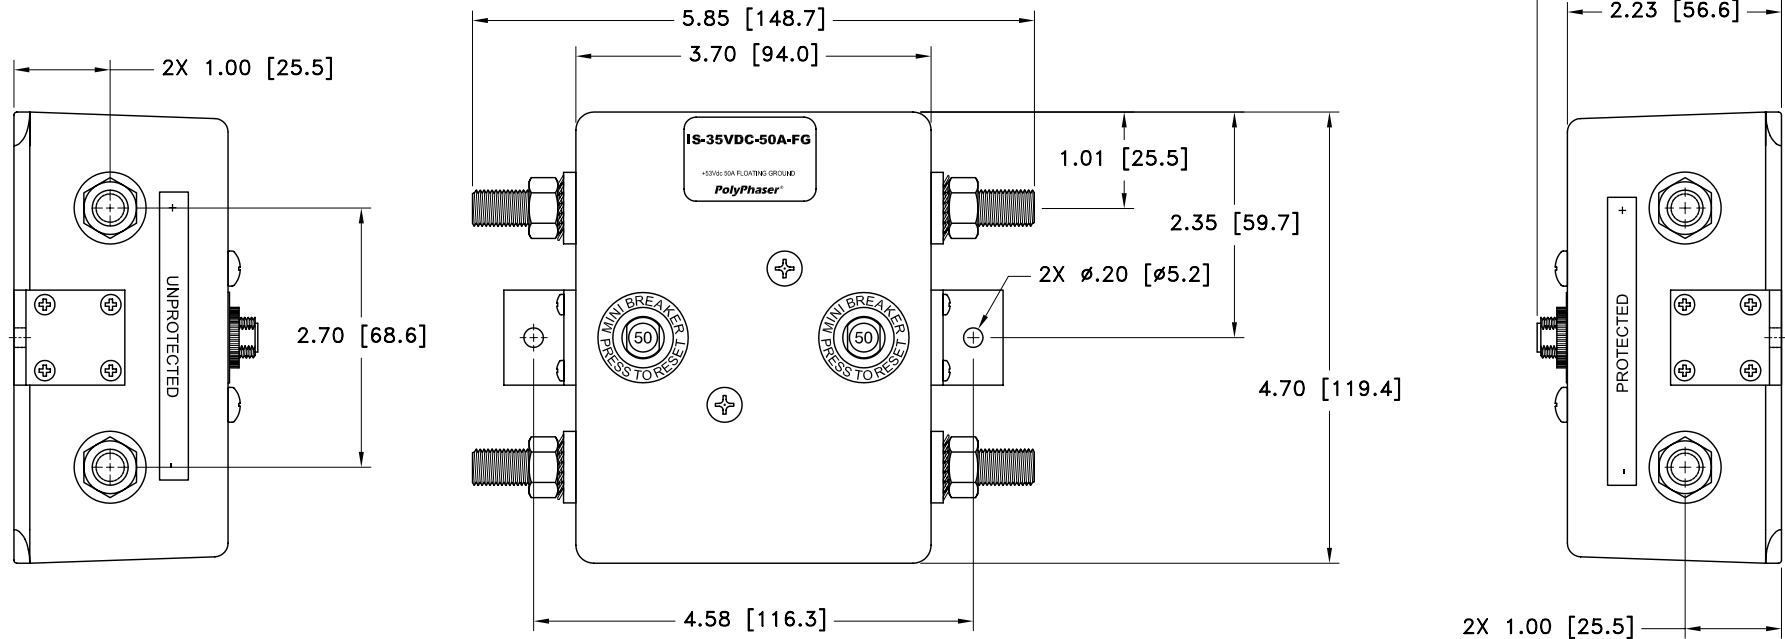

MAXIMUM CHARACTERISTICS

SURGE PER PAIR:  
18kA IEC 1000-4-5 8/20µs WAVE FORM

TURN-ON:  
53Vdc

TURN-ON TIME:  
<2ns FOR 2kV/ns

RESISTANCE:  
.02 Ω

CONNECTIONS:  
3/8-24 STUDS

USER CURRENT:  
50A MAXIMUM

OPERATING TEMPERATURE:  
-40°C TO +65°C

STORAGE TEMPERATURE:  
-40°C TO +65°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER K. MUNRO	DATE 01/31/96	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION <b>IS-35VDC-50A-FG</b> CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER T. KULBIEDA	DATE 02/02/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 02/02/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1