


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

# REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/21/99 <sub>JC</sub>	MM	PH	RM
B	05/21/02 <sub>SH</sub>	LC	PH	RM

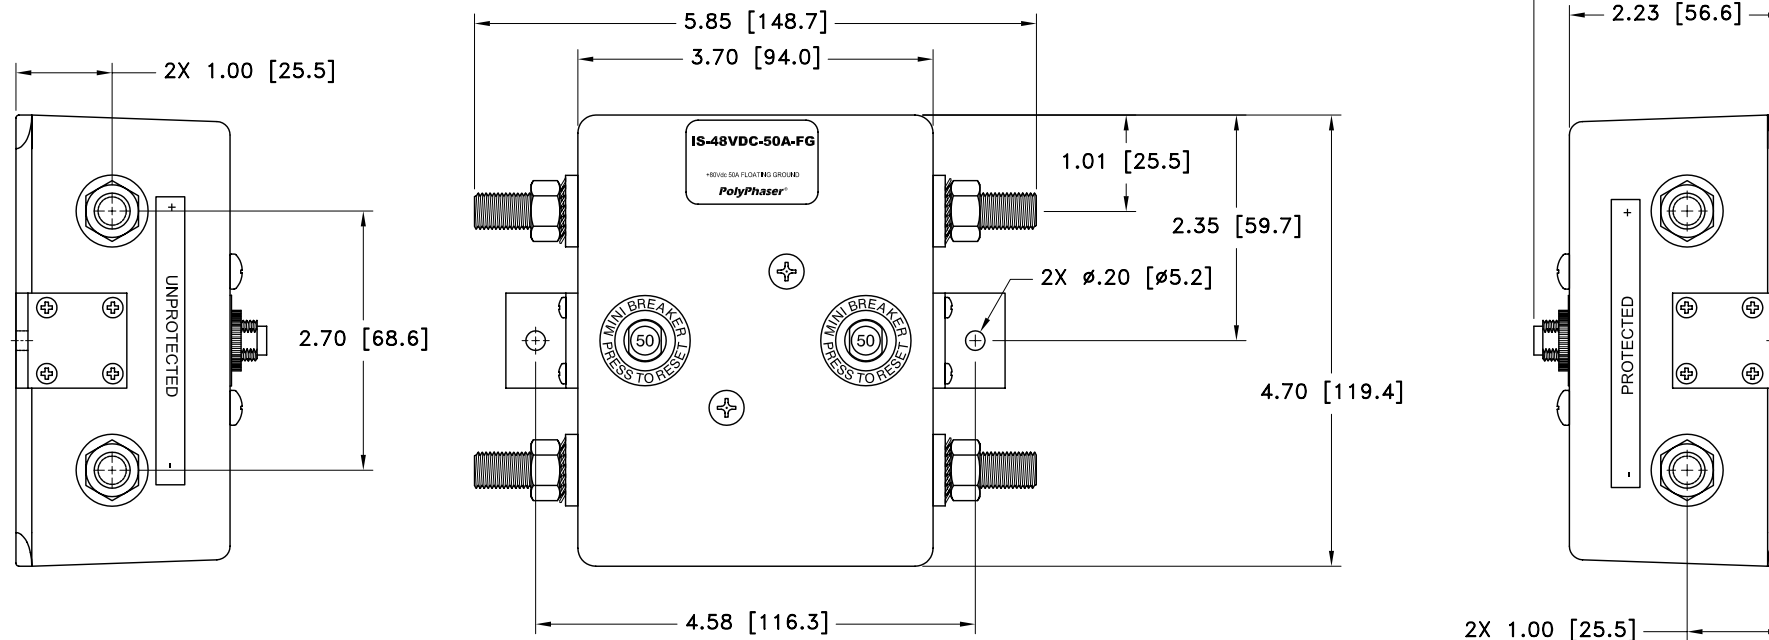

## MAXIMUM CHARACTERISTICS

SURGE PER PAIR:  
18kA IEC 1000-4-5 8/20 $\mu$ s WAVE FORM  
TURN-ON:  
80Vdc  
TURN-ON TIME:  
<2ns FOR 2kV/ns  
RESISTANCE:  
0.02 $\Omega$   
CONNECTIONS:  
3/8-24 STUDS  
USER CURRENT:  
50A MAXIMUM  
OPERATING TEMPERATURE:  
-40°C TO +65°C  
STORAGE TEMPERATURE:  
-40°C TO +65°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 01/10/97	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION IS-48VDC-50A-FG CUSTOMER PRINT		
MECH ENGINEER -----	DATE -----			
ELEC ENGINEER T. KULBIEDA	DATE 01/14/97			
MARKETING -----	DATE -----			
QUALITY DEPT R. MATHEUS	DATE 02/16/97	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2
		SHEET 1 OF 1		