


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	06/28/96	TK	--	RM
B	10/21/99 _{JC}	MM	PH	RM
C	12/18/01 _{SH}	LC	PH	RM

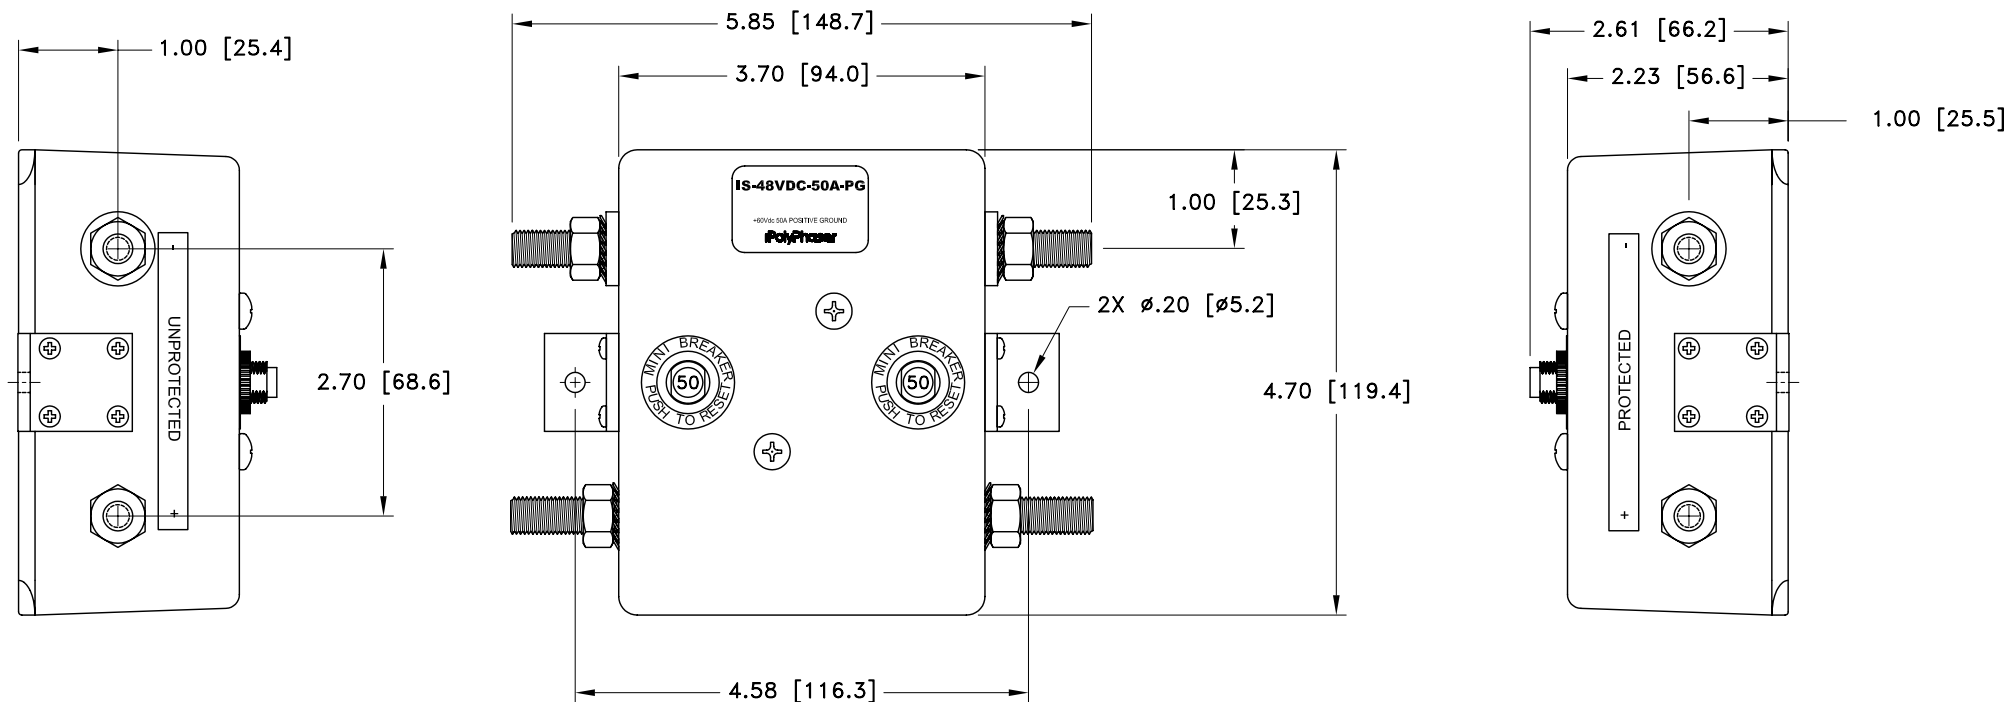

MAXIMUM CHARACTERISTICS

SURGE PER PAIR:
18kA IEC 1000-4-5 8/20 μ s WAVEFORM

TURN-ON:
-80Vdc

TURN-ON TIME:
<2ns FOR 2kV/ns

RESISTANCE:
0.02 Ω

CONNECTIONS:
3/8-24 STUDS

USER CURRENT:
50A MAXIMUM

TEMPERATURE:
-40°C TO 65°C

CUSTOMER APPROVAL: _____ DATE: _____
ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 03/08/96	<p align="center">PolyPhaser®</p> <p align="center">P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476</p> <p align="center">IS-48VDC-50A-PG</p> <p align="center">CUSTOMER PRINT</p>		
MECH ENGINEER -----	DATE -----			
ELEC ENGINEER T. KULBIEDA	DATE 06/28/96			
MARKETING -----	DATE -----			
QUALITY DEPT R. MATHEUS	DATE 06/28/96			
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1	