
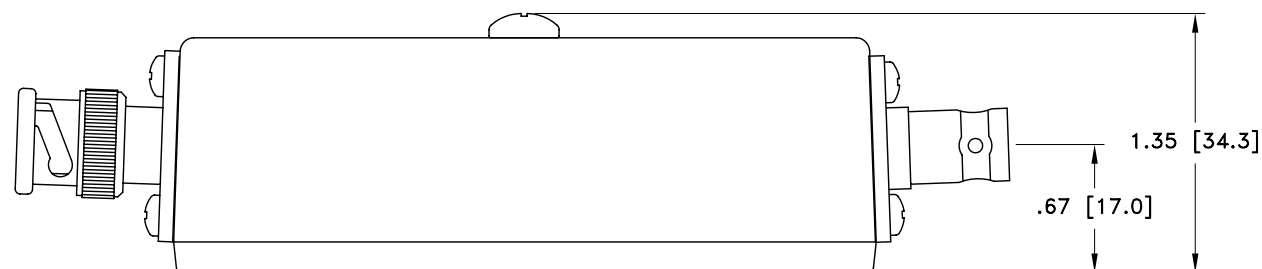
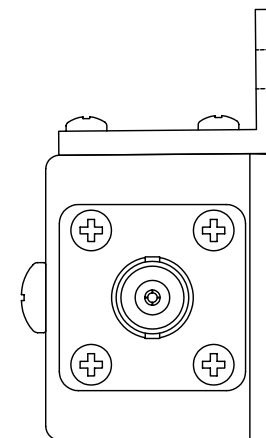


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	01/24/97	KCB	--	RM
B	05/23/97 _{JC}	KCB	--	RM
C	06/06/02 _{IR}	LC	PH	RM

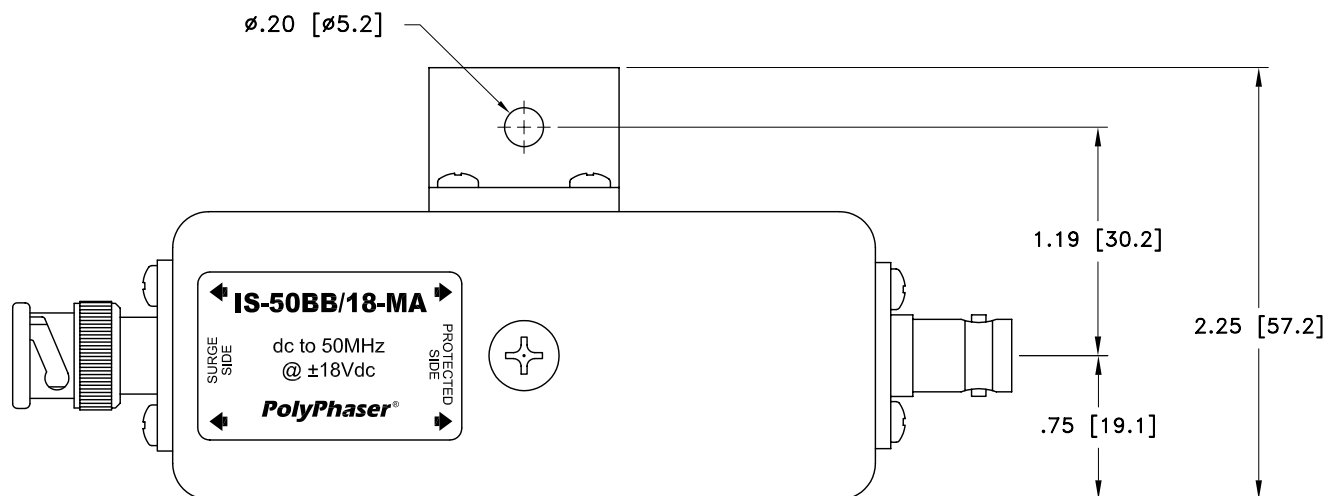

MAXIMUM CHARACTERISTICS

SURGE:
18kA IEC 1000-4-5 8/20 μ s WAVEFORM 110J

TURN-ON:
19Vdc

TURN-ON TIME:
4ns FOR 2kV/ns

FREQUENCY RANGE:
DC TO 50MHz

VSWR:
≤1.1 TO 1 OVER FREQUENCY RANGE

INSERTION LOSS:
 $\leq 0.3\text{dB}$ OVER FREQUENCY RANGE

USER CURRENT:
3.0Adc CONTINUOUS

TEMPERATURE:
-55°C TO +85°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 10/22/96	PolyPhaser® P.O. BOX 9000, MINDEN, NY 89423-9000 (775) 782-2511 FAX (775) 782-4478 DWG NO/PART NO/DESCRIPTION IS-50BB/18-MA CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER L. CHANG	DATE 10/22/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 10/22/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1