
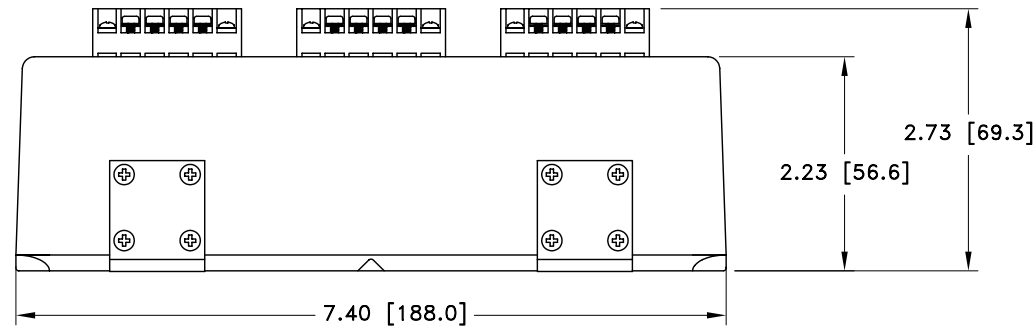


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS					
REV LTR	DATE	ENG	MKTG	Q.A.	
E	01/17/01	IB	KCB	PH	RM
F	02/03/03	IB	LC	SD	LJ

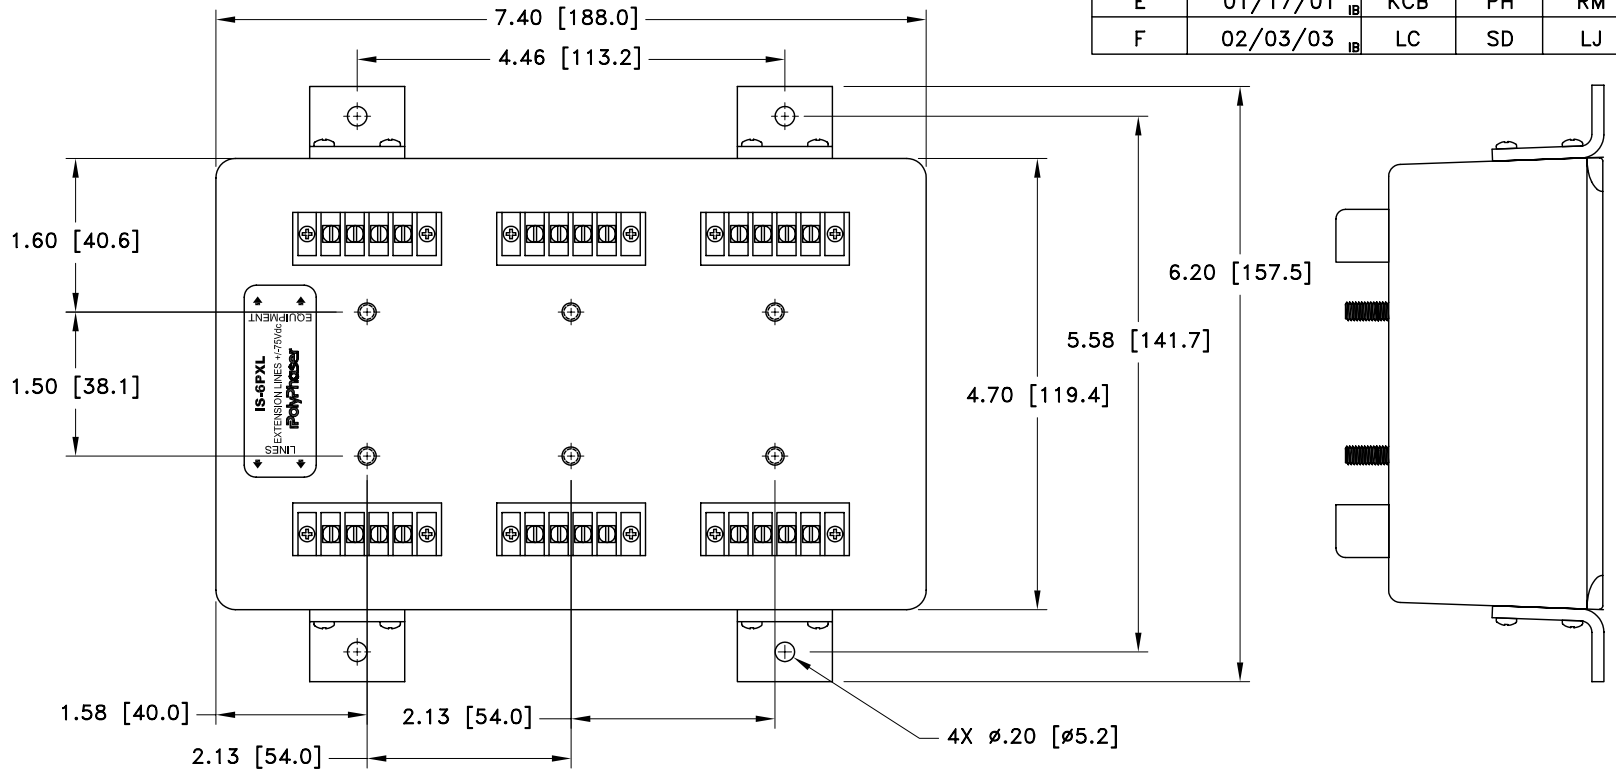

MAXIMUM CHARACTERISTICS

SURGE:
40kA

TURN-ON @ 10mA:
±75Vdc

RESISTANCE:
20Ω ±1%

CAPACITANCE:
11nF

JOULES:
550J

LET-THROUGH:
100Vp

-3dB (600Ω) BANDWIDTH:
30kHz

TEMPERATURE:
-40°C TO 85°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____
ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER D. SCHARMANN	DATE 03/28/91
MECH ENGINEER -----	DATE -----
ELEC ENGINEER J. JONES	DATE 03/28/91
MARKETING -----	DATE -----
QUALITY DEPT N. JOHN	DATE 03/28/91

PolyPhaser

P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476
DWG NO/PART NO/DESCRIPTION

IS-6PXL
CUSTOMER PRINT

CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1
--------------------	------------------	--------------	-----------------