
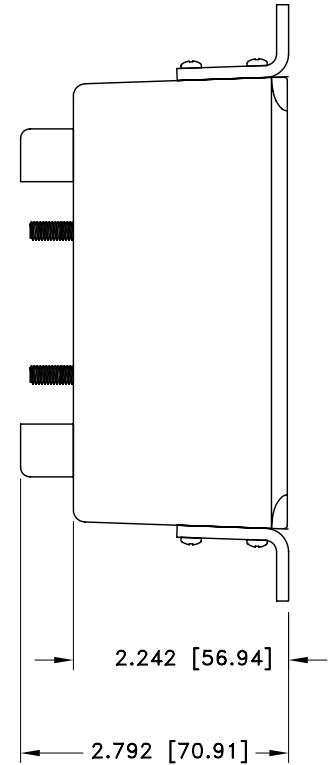


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
B	07/14/98 ^{SH}	A. G.	--	R. M.
C	05/06/99 ^{JCG}	AG	TF	RM
D	12/22/99 ^{SH}	M.M	P.H	R.M
E	01/17/01 ^{IB}	KCB	PH	RM

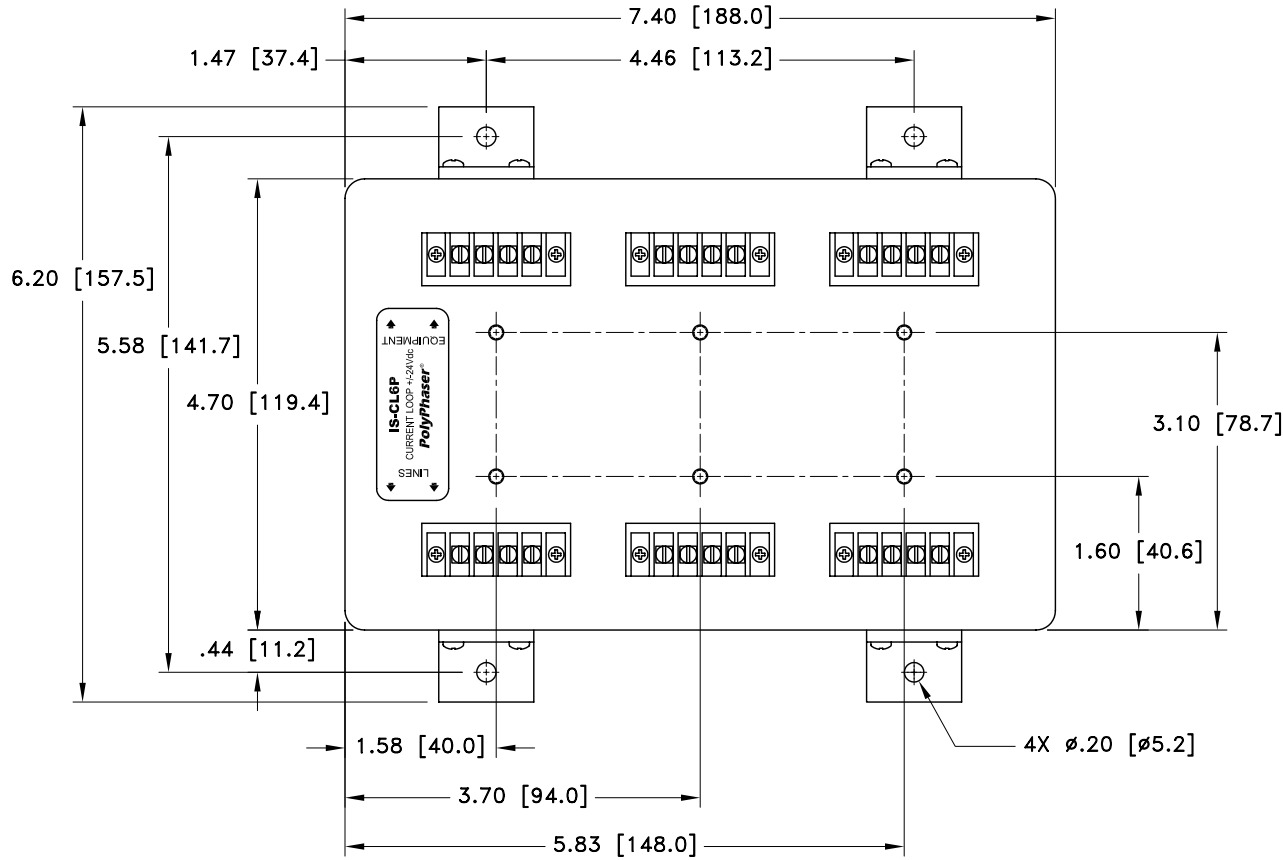

MAXIMUM CHARACTERISTICS

APPLICATION:
CURRENT LOOPS
SURGE:
36kA IEC 1000-4-5 8/20 μ s WAVEFORM
TURN-ON:
 ± 27 Vdc
TURN-ON TIME:
 ≤ 2 ns
RESISTANCE:
 $\leq 0.1 \Omega$
CAPACITANCE:
30nF
LET-THROUGH:
35Vp
BAND WIDTH (-3dB, 600 Ω)
65kHz
TEMPERATURE:
-40°C TO +85°C STORAGE/OPERATING+50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 10/22/97	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION IS-CL6P CUSTOMER PRINT			
MECH ENGINEER O. AKDAG	DATE 10/22/97				
ELEC ENGINEER K. BARTEL	DATE 10/22/97				
MARKETING - - - -	DATE - - - -				
QUALITY DEPT R. MILLER	DATE 10/22/97	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1