


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
B	12/16/99 <sup>SH</sup>	M.M	P.H	R.M
C	01/17/01 <sup>IB</sup>	KCB	PH	RM

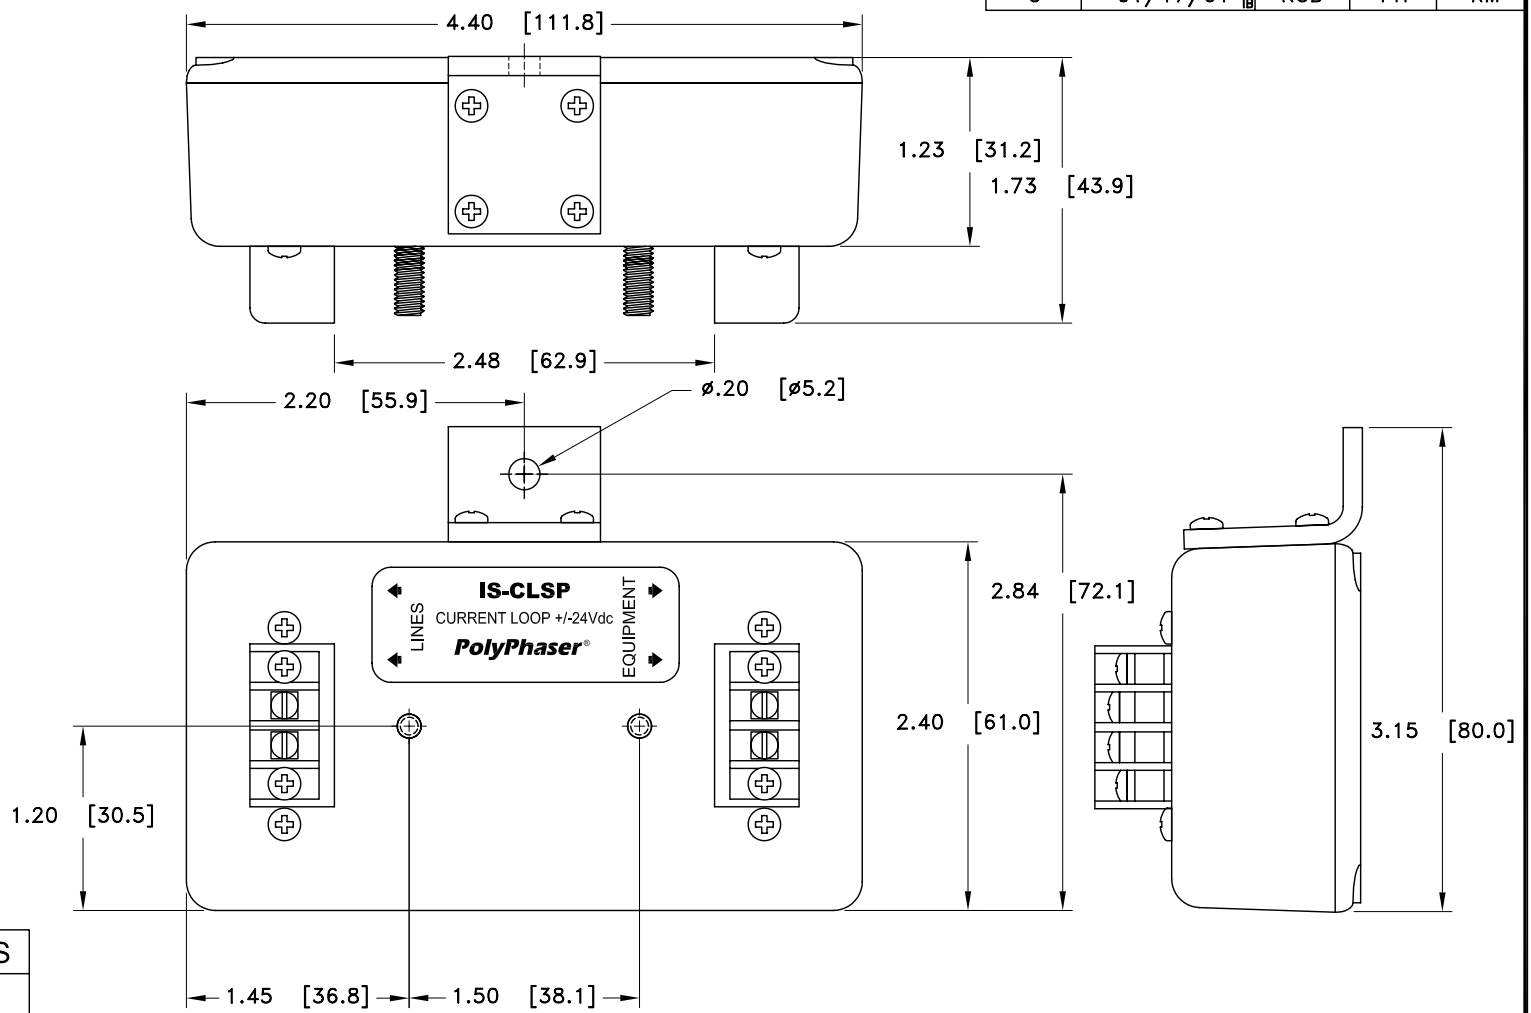

MAXIMUM CHARACTERISTICS
APPLICATION: CURRENT LOOPS
SURGE: 36kA IEC 1000-4-5 8/20 $\mu$ s WAVEFORM
TURN-ON: $\pm 27$ Vdc
RESISTANCE: $\leq 0.1 \Omega$
CAPACITANCE: 30nF
SURGE ENERGY: 425J
BANDWIDTH: 65kHz

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_  
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER S. HALL	DATE 07/13/98	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION <b>IS-CLSP</b> <b>CUSTOMER PRINT</b>			
MECH ENGINEER J. VITELLO	DATE 10/06/98				
ELEC ENGINEER A .GULBAG	DATE 10/07/98				
MARKETING - - - -	DATE - - - -				
QUALITY DEPT R. MATHEUS	DATE 10/06/98	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.25	SHEET 1 OF 1