



ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
E	03/02/01 _{JC}	KCB	PH	RM
F	12/16/02 _{IB}	LC	SD	LJ

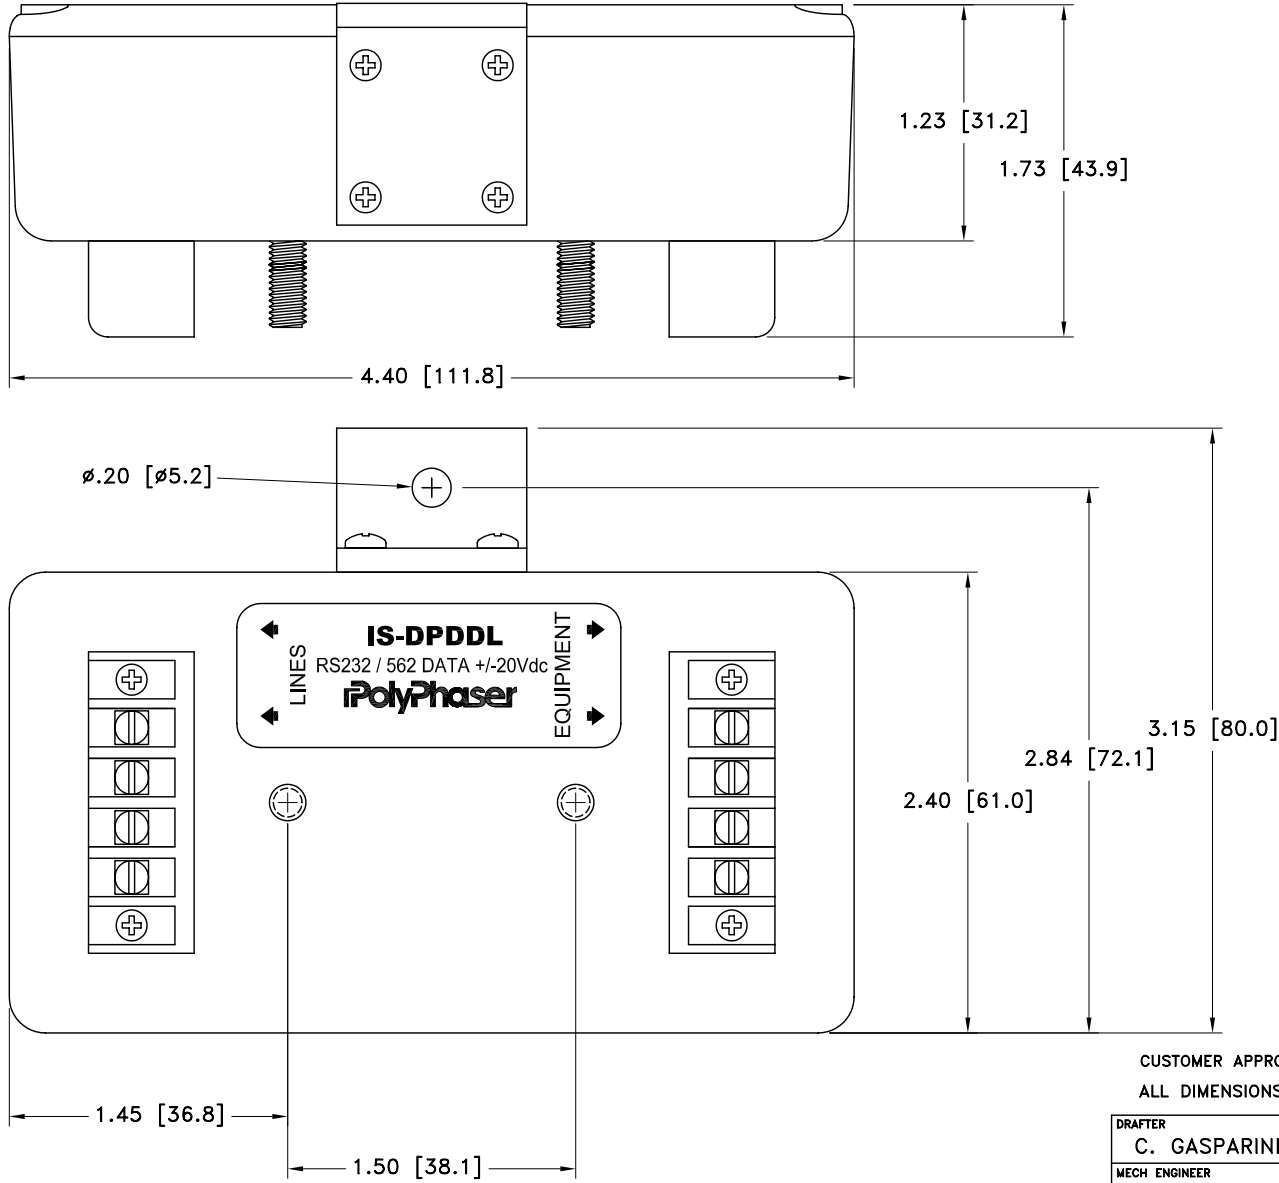

MAXIMUM CHARACTERISTICS	
APPLICATION:	RS232/562 DATA
SURGE:	36kA ANSI C62.1 8/20 WAVEFORM 138 JOULES
TURN-ON:	±20Vdc ±5%
SERIES RESISTANCE:	1 Ω
CAPACITANCE REF. TO GND:	30pF
MAX ENERGY:	425J
LET THROUGH:	24Vp TYPICAL
BANDWIDTH:	120MHz

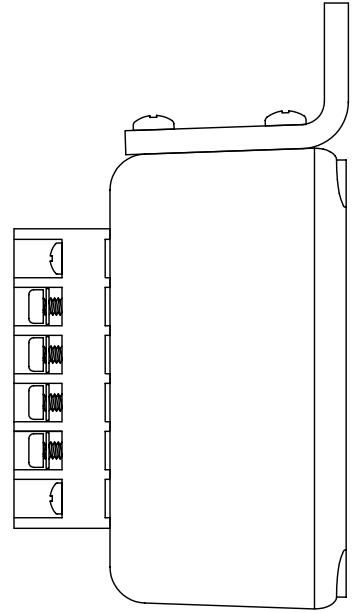

CUSTOMER APPROVAL: _____ DATE: _____
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER	C. GASPARINI	DATE	01/17/96
MECH ENGINEER	O. AKDAG	DATE	01/17/96
ELEC ENGINEER	K. BARTEL	DATE	01/17/96
MARKETING	-----	DATE	-----
QUALITY DEPT	R. MATHEUS	DATE	01/17/96

PolyPhaser

P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476
 DWG NO/PART NO/DESCRIPTION

IS-DPDDL
 CUSTOMER PRINT

CAGE CODE	FILE NAME	SCALE	SHEET
61114	-C1	1/1	1 OF 1