


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
D	12/15/99 <sup>SH</sup>	M.M	P.H	R.M
E	01/17/01 <sup>IB</sup>	KCB	PH	RM
F	12/24/02 <sup>IB</sup>	LC	PH	LJ

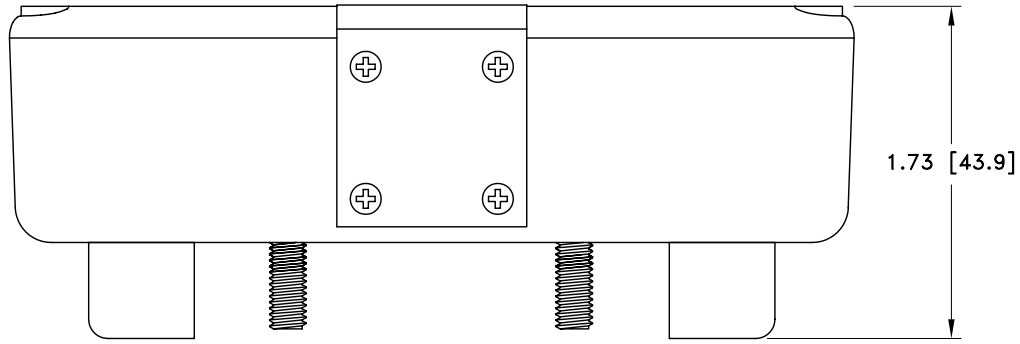

**MAXIMUM CHARACTERISTICS**

SURGE:  
40ka ANSI C62.1 8/20 WAVEFORM

TURN-ON @ 10mA:  
±75Vdc

RESISTANCE:  
20Ω @ 1%



CAPACITANCE:  
11nF

JOULES:  
550J

LET-THROUGH:  
100Vp

-3dB (600Ω) BANDWIDTH:  
30kHz

TEMPERATURE:  
-40°C TO 85°C STORAGE/OPERATING +50°C

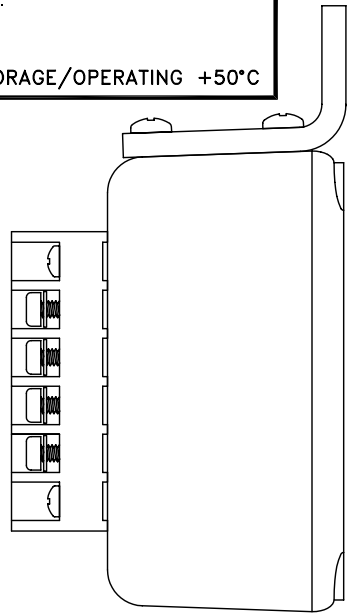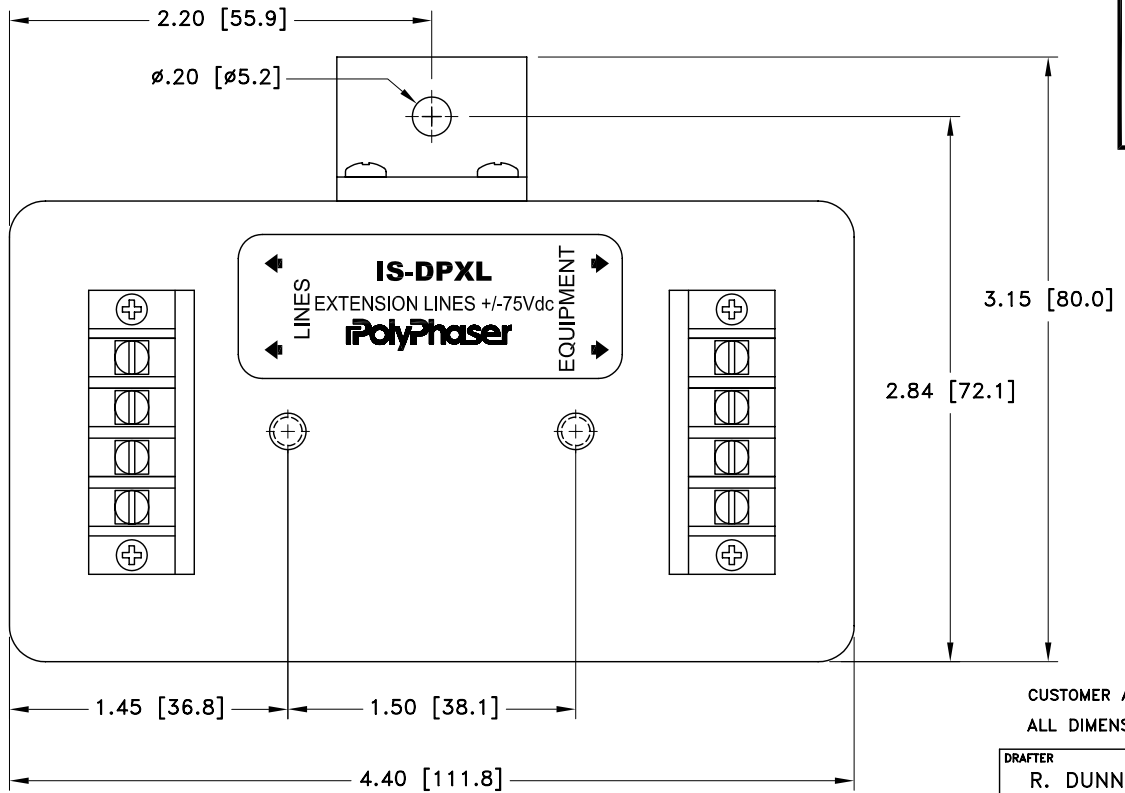

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. DUNNING	DATE 07/11/94
MECH ENGINEER -----	DATE -----
ELEC ENGINEER J. JONES	DATE 07/11/94
MARKETING -----	DATE -----
QUALITY DEPT R. MATHEUS	DATE 07/11/94

**PolyPhaser**

P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476

DWG NO/PART NO/DESCRIPTION

**IS-DPXL**

CUSTOMER PRINT

CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1
--------------------	------------------	--------------	-----------------